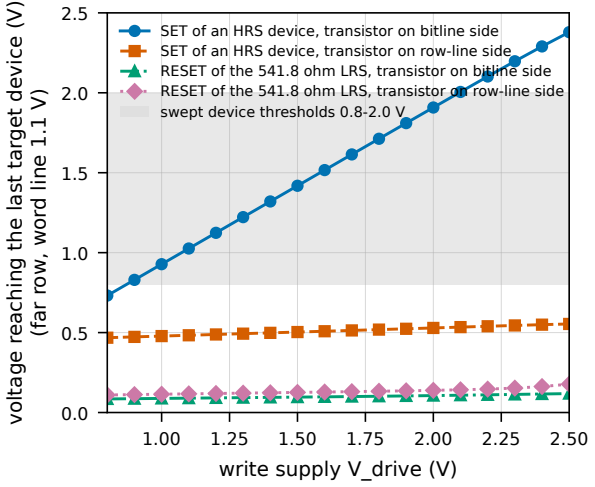
SET of an HRS device, transistor on bitline side
SET of an HRS device, transistor on row-line side
RESET of the 541.8 ohm LRS, transistor on bitline side
RESET of the 541.8 ohm LRS, transistor on row-line side
swept device thresholds 0.8-2.0 V
voltage reaching the last target device (V)
(far row, word line 1.1 V)
write supply V_drive (V)
0.0
0.5
1.0
1.5
2.0
2.5
1.00
1.25
1.50
1.75
2.00
2.25
2.50

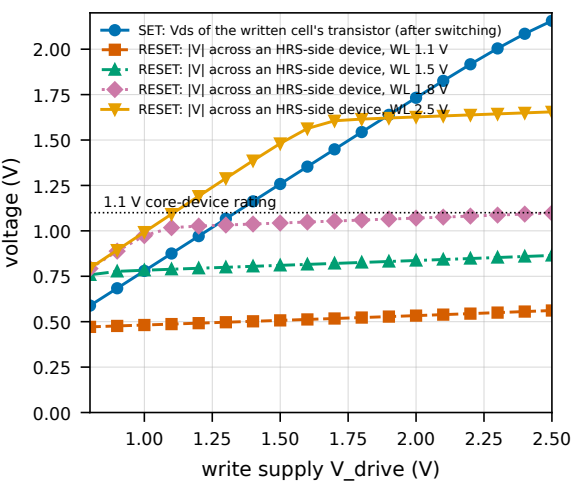
SET: Vds of the written cell's transistor (after switching)
RESET: |V| across an HRS-side device, WL 1.1 V
RESET: |V| across an HRS-side device, WL 1.5 V
RESET: |V| across an HRS-side device, WL 1.8 V
RESET: |V| across an HRS-side device, WL 2.5 V
1.1 V core-device rating
voltage (V)
write supply V_drive (V)
0.00
0.25
0.50
0.75
1.00
1.25
1.50
1.75
2.00
1.00
1.25
1.50
1.75
2.00
2.25
2.50