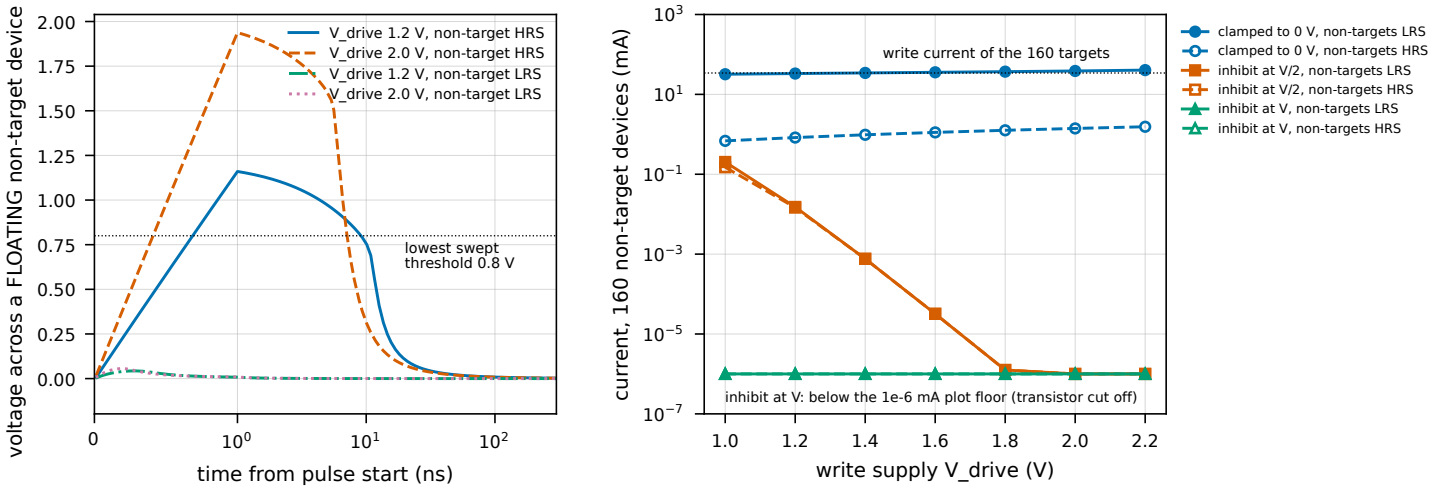
voltage across a FLOATING non-target device
time from pulse start (ns)
V_drive 1.2 V, non-target HRS
V_drive 2.0 V, non-target HRS
V_drive 1.2 V, non-target LRS
V_drive 2.0 V, non-target LRS
lowest swept
threshold 0.8 V
current, 160 non-target devices (mA)
write supply V_drive (V)
write current of the 160 targets
inhibit at V: below the 1e-6 mA plot floor (transistor cut off)
clamped to 0 V, non-targets LRS
clamped to 0 V, non-targets HRS
inhibit at V/2, non-targets LRS
inhibit at V/2, non-targets HRS
inhibit at V, non-targets LRS
inhibit at V, non-targets HRS