

FILE C:\PTX\TNS\DESIGN C.R. 11
PAGE 01 TO 04
CAL: TDIC/10/1013
44-50 & 89-93
DRG: (R. L. WAGHMANE)
CH: (K. S. SURKHA)
TRC: (R. C. PANCHAL)
CH: (R. L. WAGHMANE)
C.D.A. (K. S. SURKHA)
D.D.S. (K. S. SURKHA)
PUPADHAY


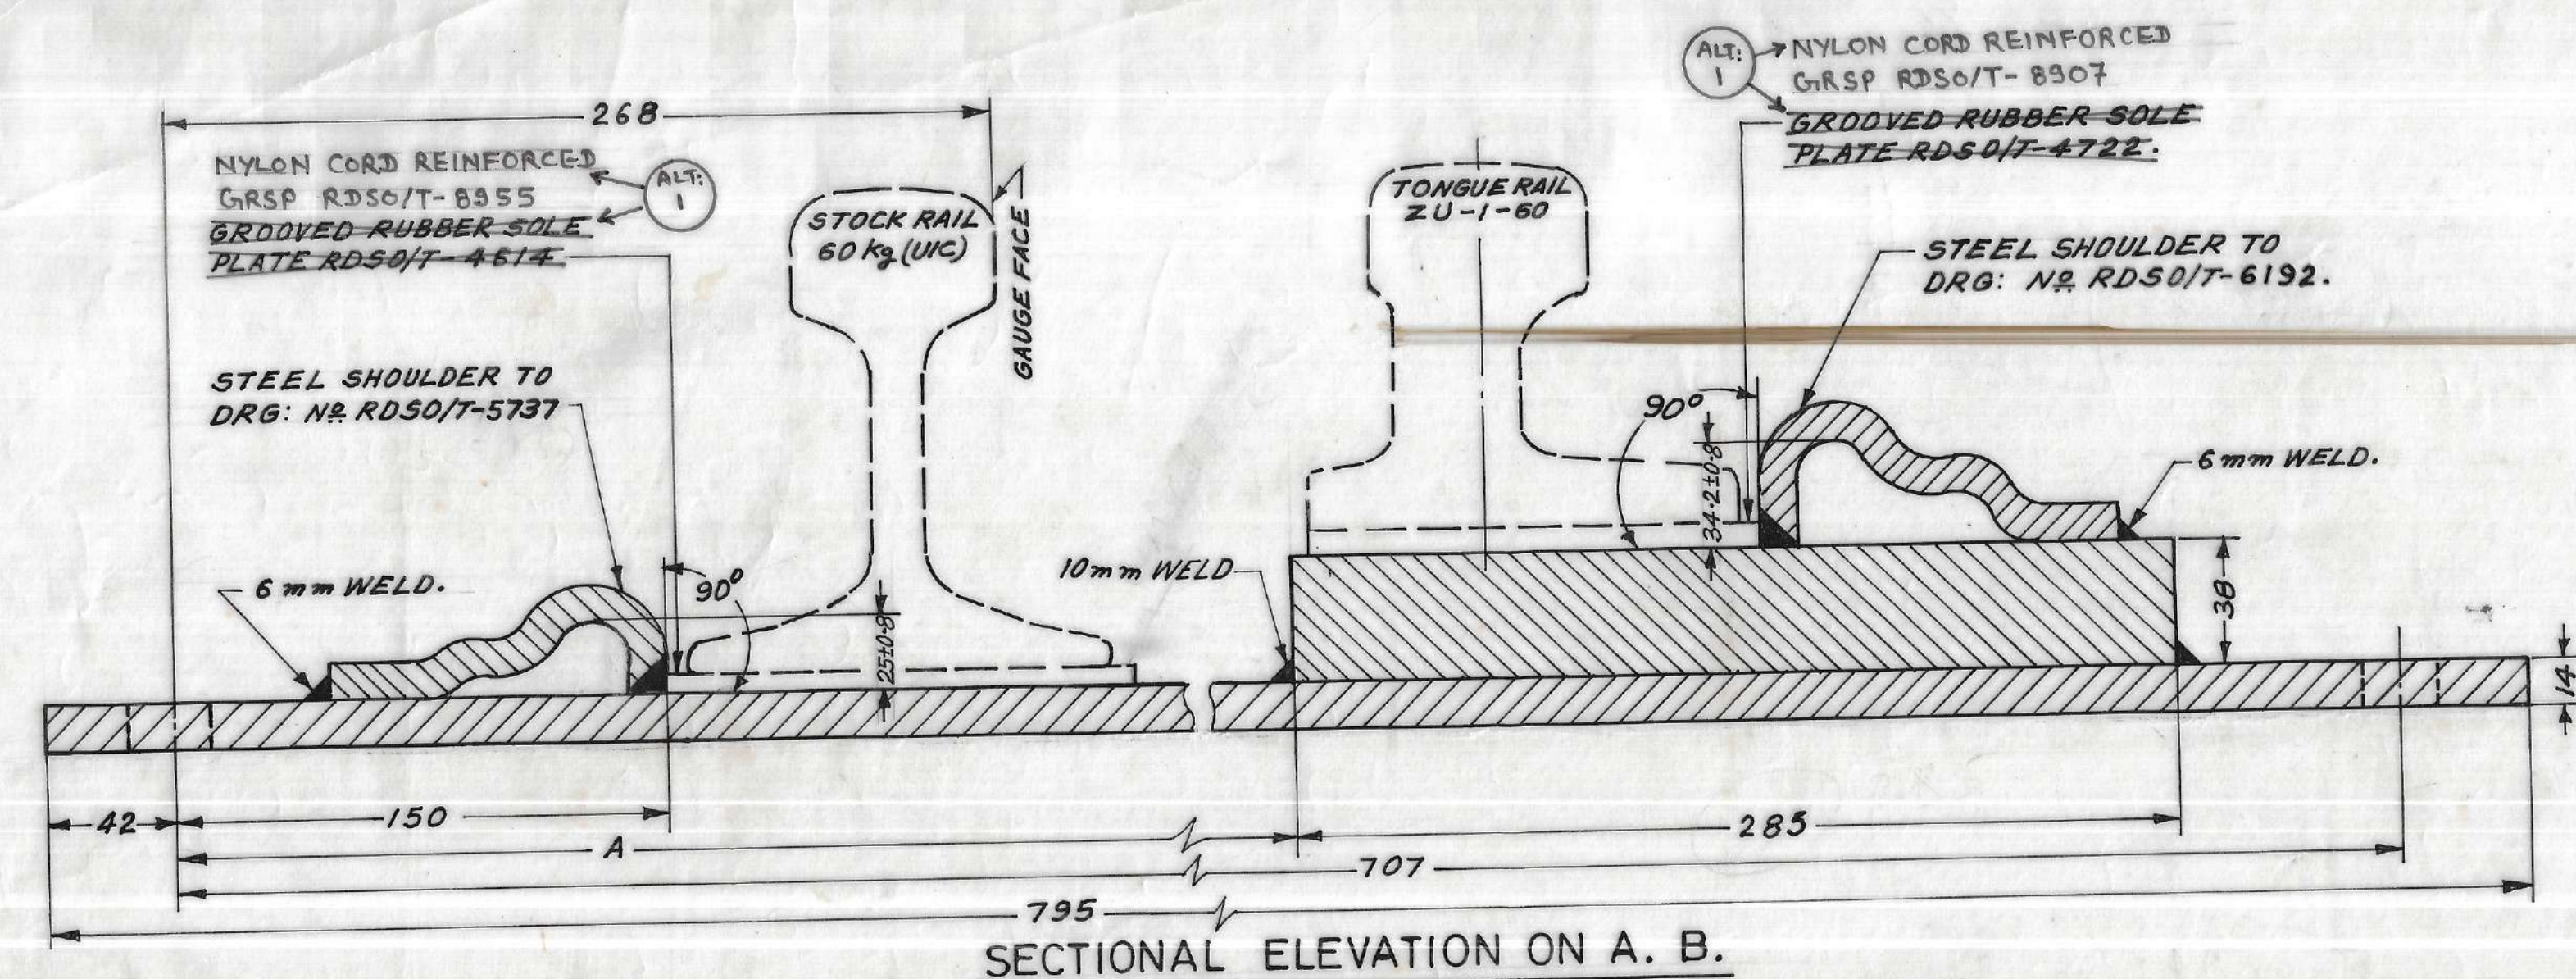


TABLE OF DIMENSIONS

SLEEPER NO.	PART NO.	(DIMENSIONS mm)			
		Y	D	F	A
22	RDSO/T-6174	1.64	364.5	359	360
23	RDSO/T-6175	1.70	381	375.5	376

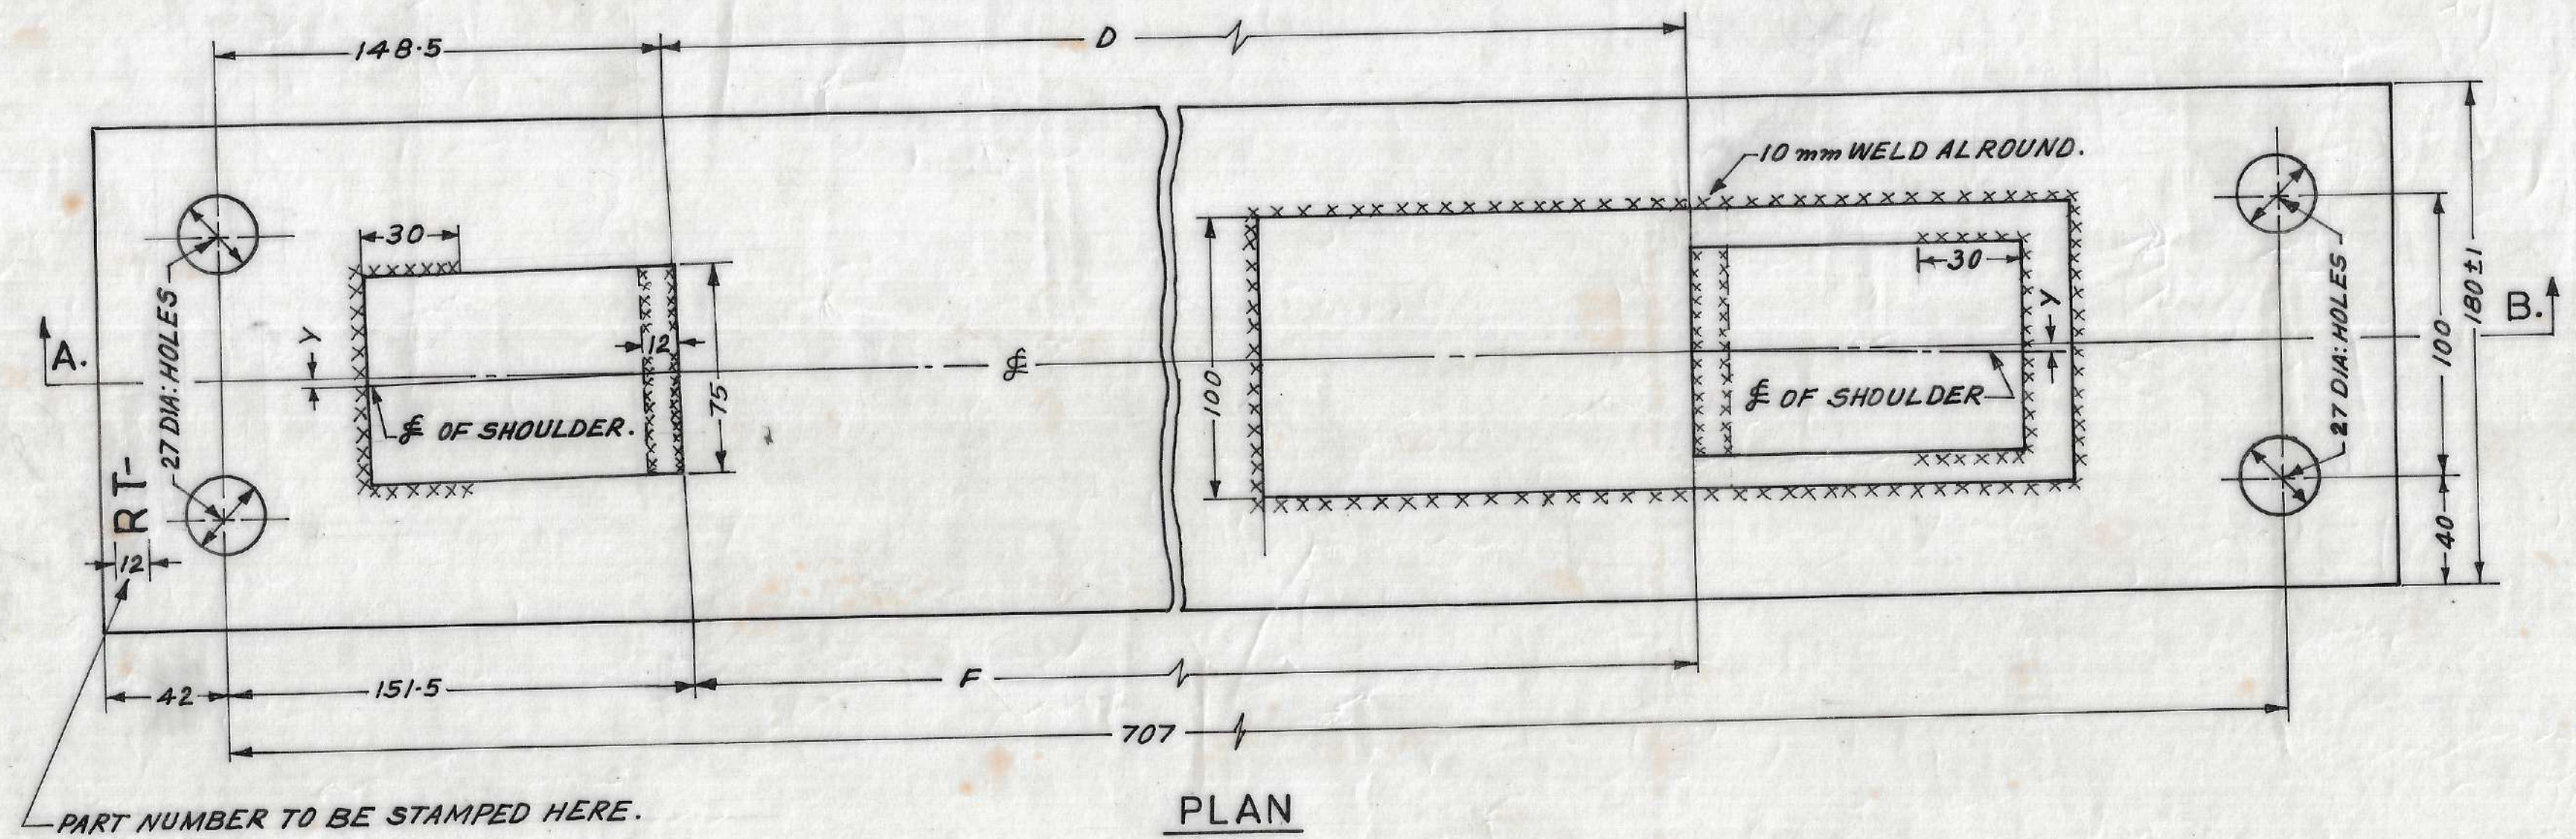

- NOTE
1. ALL DIMENSIONS ARE IN MILLIMETRES.
 2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
 3. A TOLERANCE OF 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
 4. DIMENSIONS GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATES.

3. IRS. T 10.	MILLIMETRES	20 0 20 40 60 80	1. GROOVED RUBBER SOLE	20.09.21
2. IS: 2062-1999			PLATES REPLACED WITH	
1. IRS. WELDED BRIDGE			NYLON CORD REINFORCED	
CODE FOR WELDING.			GRSP	
SPECIFICATION	SCALE	ALT:	DESCRIPTION	DATE

1 EACH	10125 mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAIL FOR 1 IN 12 TURNOUT B.G.(1673mm)FOR 60 kg (UIC) ON P.S.C. SLEEPERS	RDSO/T-6155
N. OFF	DESCRIPTION FOR DRAWING	N.
THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW-226011, INDIA AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.		
R. D. S. O.		
SPECIAL FLAT BEARING PLATES FOR 10125mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G.(1673mm)FOR 60 kg (UIC) ON P.S.C. SLEEPERS.		
STANDARD CANCEL KEY	ADVANCE 28-11-2002	(T)
RDSO/T-6174 & RDSO/T-6175		