



SIDE ELEVATION

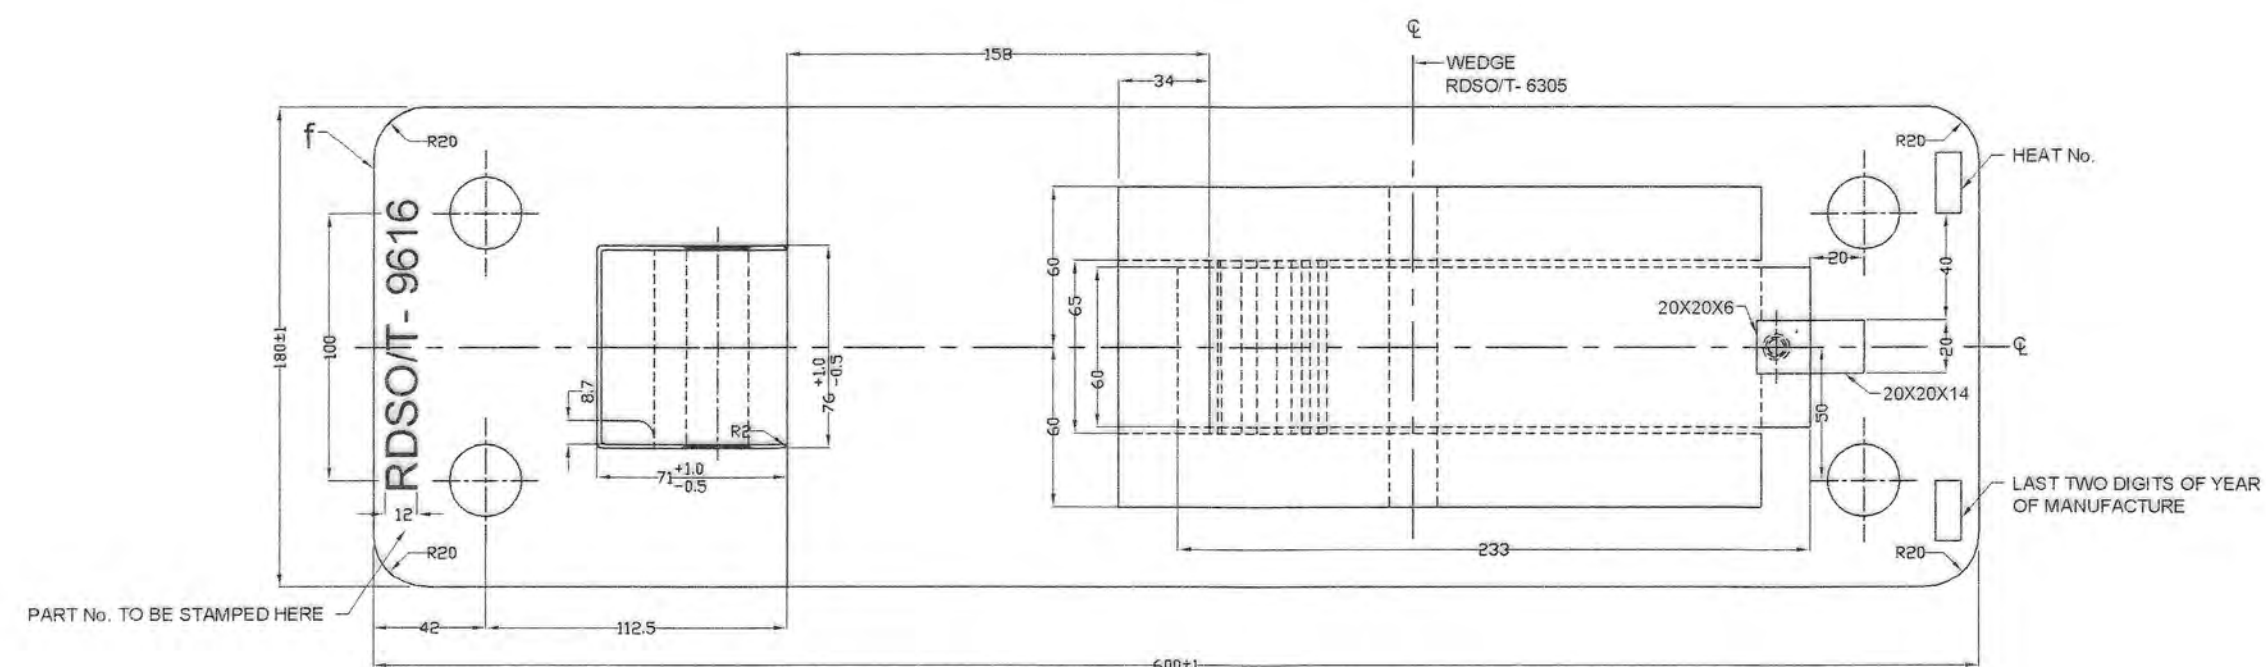

PLAN

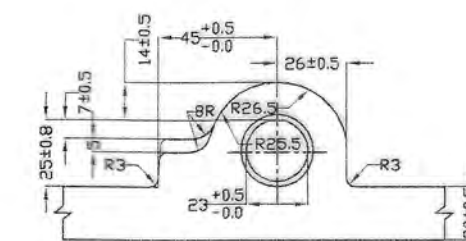

DETAIL 'A'

7. MACHINED SURFACE SHOWN THUS ----- f.
6. THE SLIDE CHAIR SHALL BE FIXED BY MEANS OF FOUR PLATE SCREWS TO DRG. No. RDSO/T- 3913 THROUGH THE ROUND HOLES & SINGLE COIL SPRING WASHER TO DRG. No. T 10773.
5. ALL MARKING SHALL BE IN 12 MM SIZE IN RAISED LETTERS.
4. ALL THE SHARP EDGES ARE TO BE MADE BLUNT WITH 3R PREFERABLY, EXCEPT WHERE OTHERWISE SHOWN.
3. A TOLERANCE 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

IS 1030:1998 (Reaffirmed 2022)
GRADE: 280-520 W

NOT TO SCALE

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA
AND SHALL NOT BE USED, COPIED OR REPRODUCED IN
PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R.	D.	S.	O.
----	----	----	----

CAST STEEL SLIDE CHAIR FOR 10125 mm
CURVED SWITCH WITH ZU-1-60/60E1A1
THICK-WEB TONGUE RAILS
B.G. (1673 mm) FOR 60 Kg (UIC)/60E1
ON P.S.C. SLEEPERS.

STAN _D -----	ADVANCE	(T)
CANC _D -----	12-10-2023	
REV _D -----		

(T)

RDSO/T- 9616