



U. S. SUKHIA
P. P. ADHIKARI
D. S. SUKHIA
C. D. A. (K. S. SUKHIA)
APPD:
TRC:
DRG:
CAL:
C.R.N.
FILE

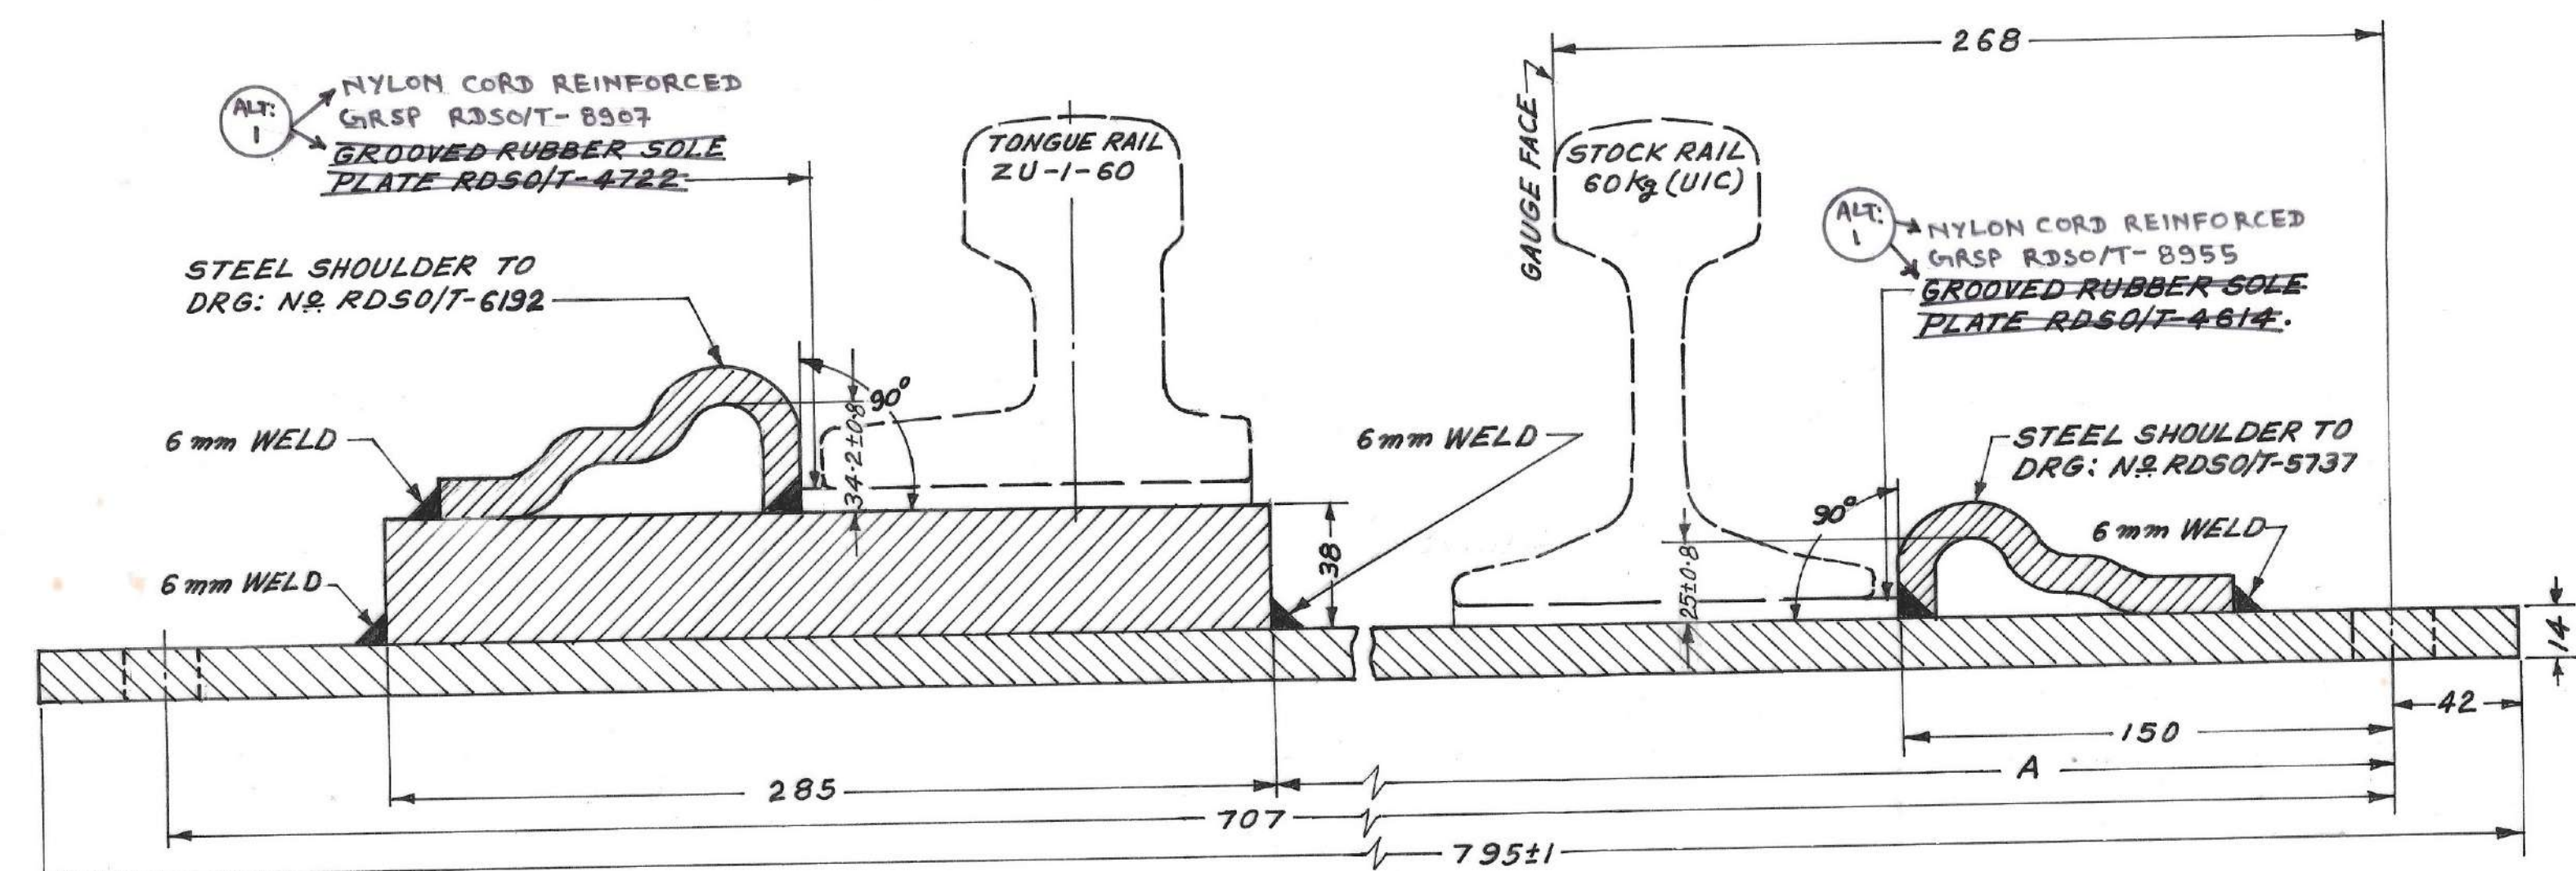

SECTIONAL ELEVATION ON A.B.

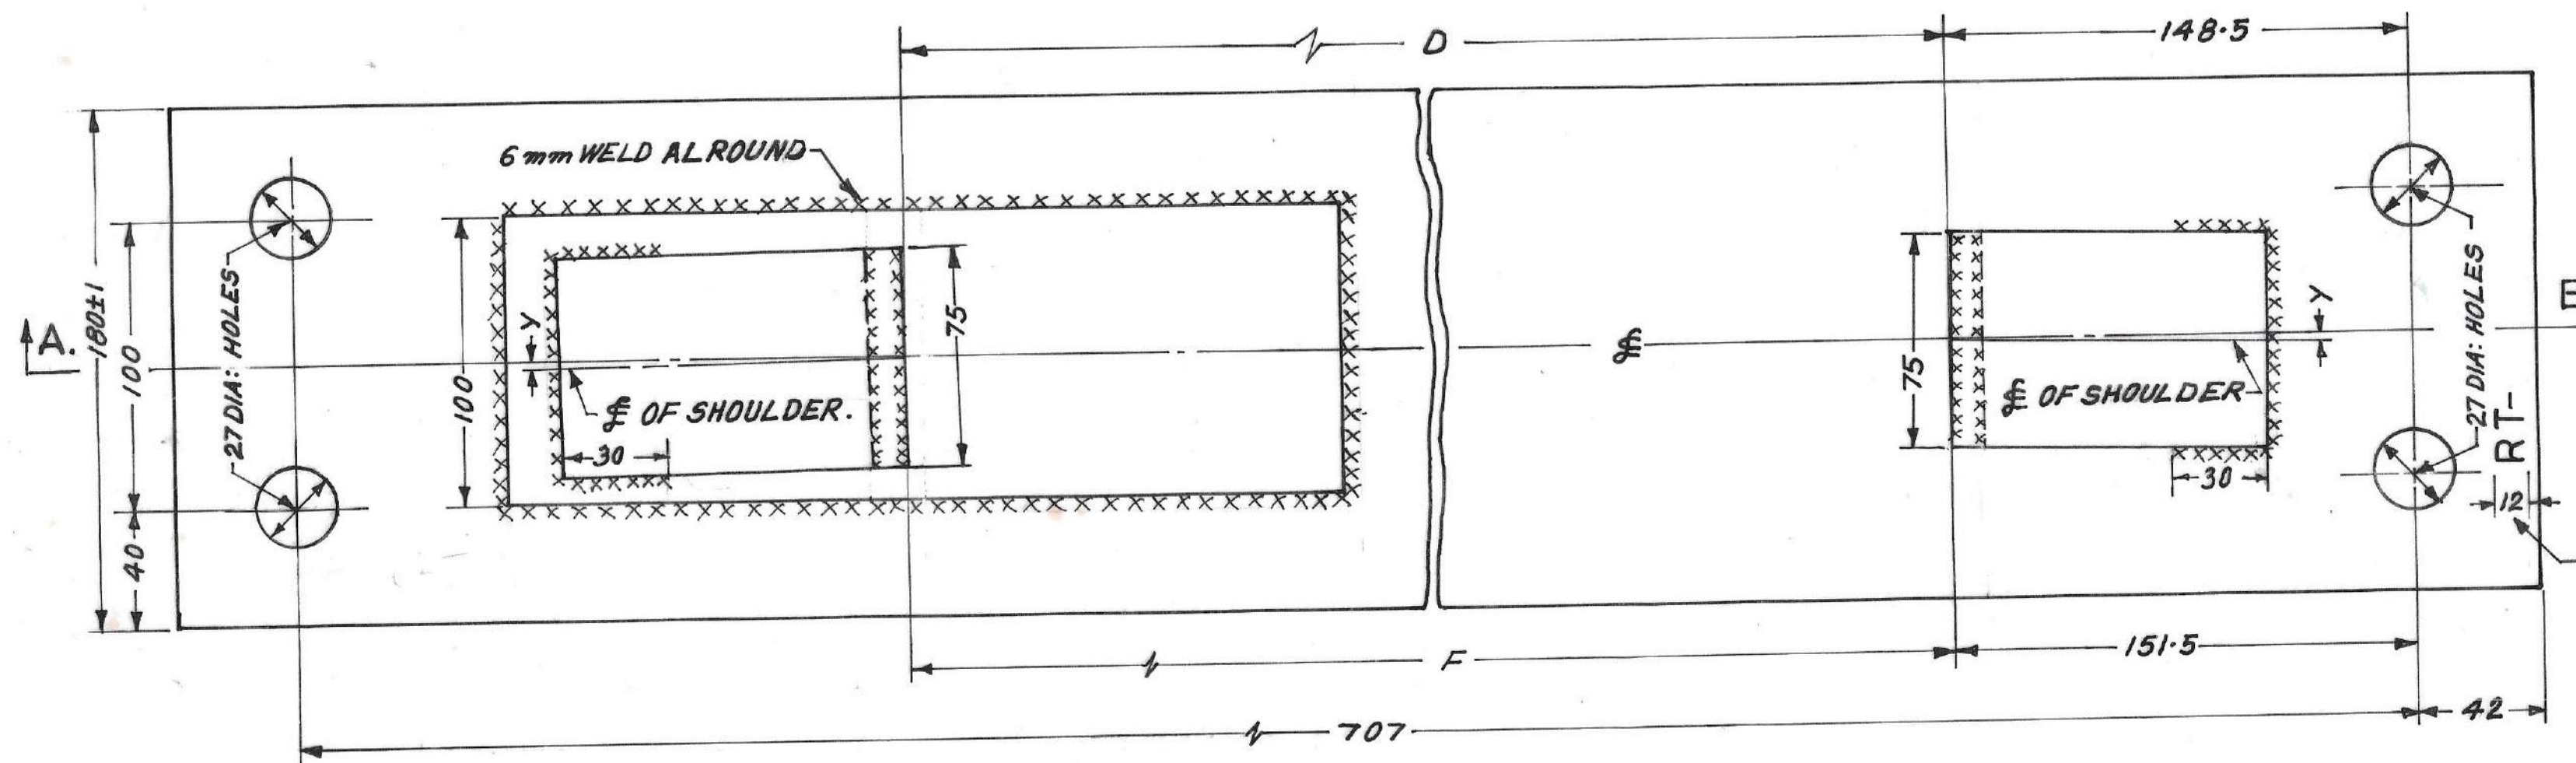

PLAN

PART NUMBER TO BE STAMPED HERE.

TABLE OF DIMENSIONS

SLEEPER N ^o	PART N ^o	(DIMENSIONS mm)			
		Y	D	F	A
22	RDSO/T-6168	1.64	364.5	359	360
23	RDSO/T-6169	1.70	381	375.5	376

- NOTE
1. ALL DIMENSIONS ARE IN MILLIMETRES.
 2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
 3. A TOLERANCE OF 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
 4. DIMENSIONS GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATE.

3. IRS. T10.
2. IS: 2062-1999.
1. IRS. WELDED BRIDGE
CODE FOR WELDING.

MILLIMETRES
20 0 20 40 60 80

SCALE

1. GROOVED RUBBER SOLE PLATES REPLACED WITH NYLON CORD REINFORCED GRSP

20.0922

ADVANCE
28-11-2002 (T)

ALT: DESCRIPTION DATE RDSO/T-6168 & RDSO/T-6169

1 EACH	10125 mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAIL FOR 1 IN 12 TURNOUT B.G.(1673mm) FOR 60kg(UIC) ON P.S.C. SLEEPERS	RDSO/T-6155
N ^o OFF	DESCRIPTION FOR DRAWING	N ^o
THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW-226011, INDIA, AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.		
R. D. S. O.		
SPECIAL FLAT BEARING PLATES FOR 10125mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G.(1673mm) FOR 60Kg (UIC) ON P.S.C. SLEEPERS.		