



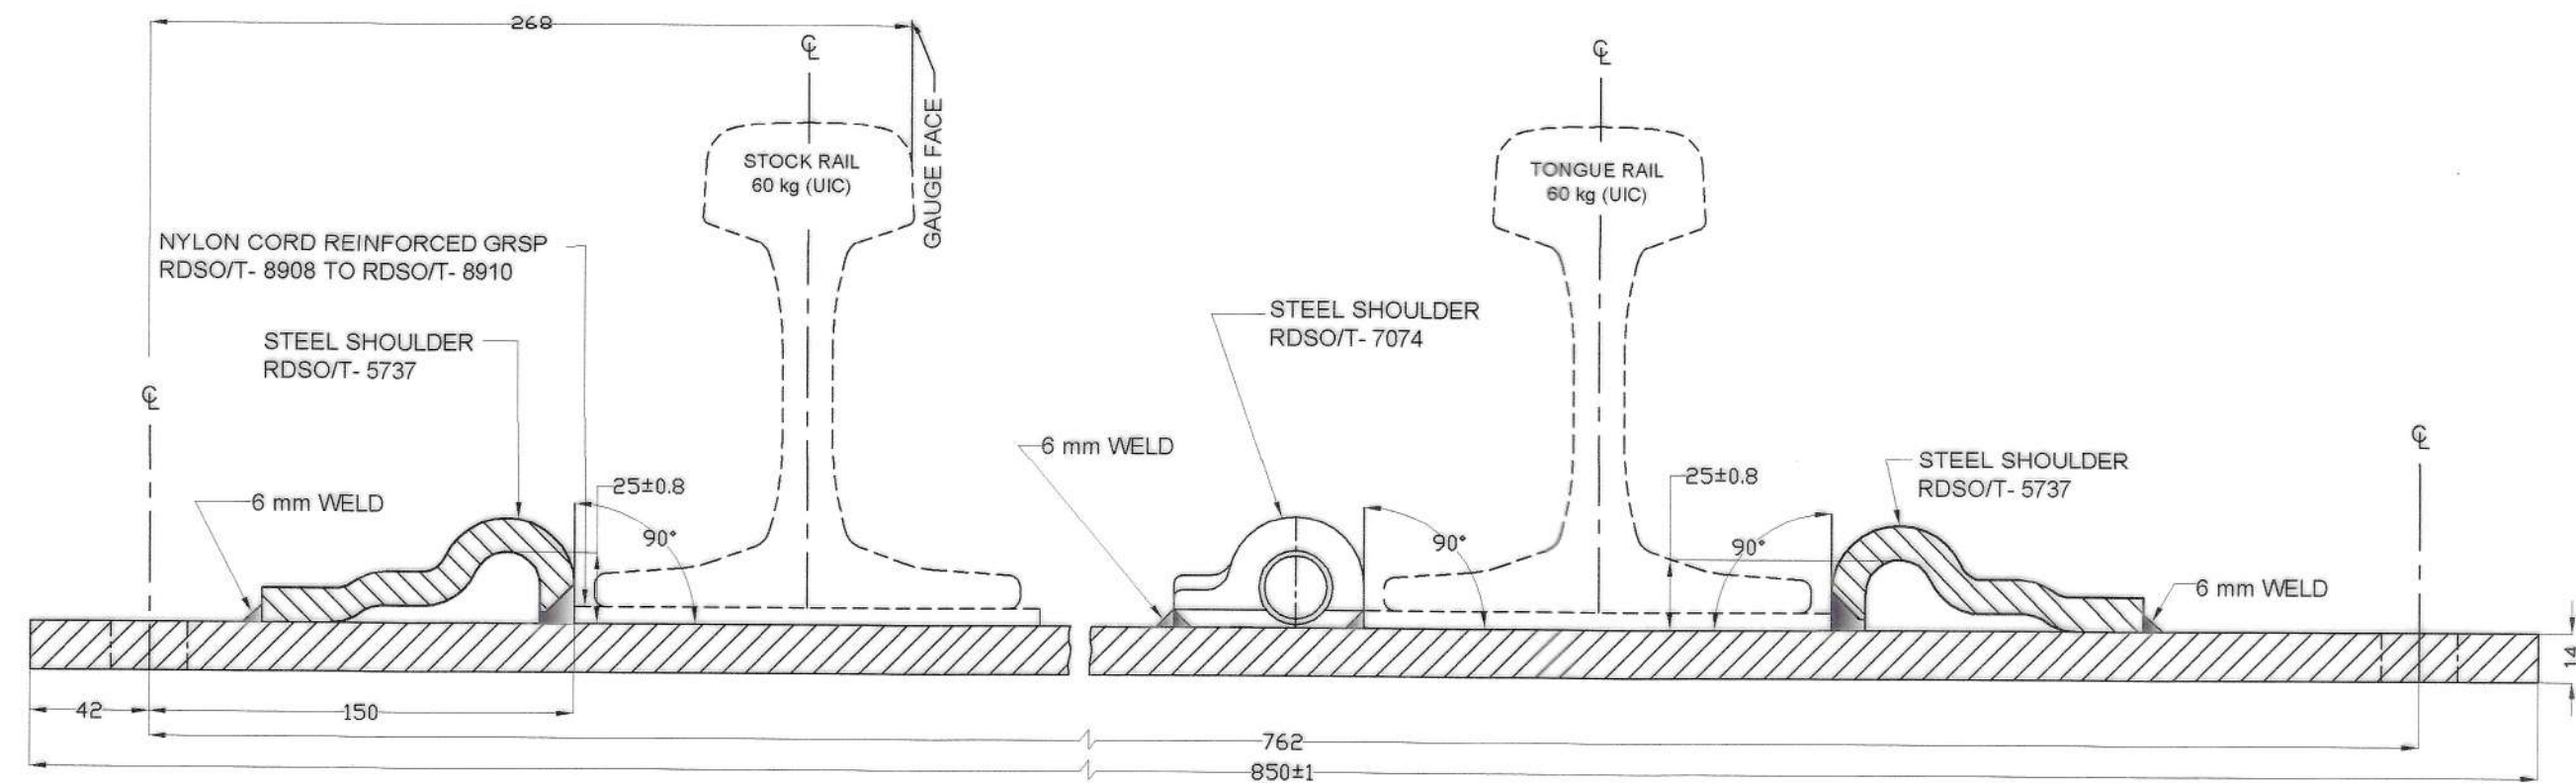

SECTIONAL ELEVATION ON AB

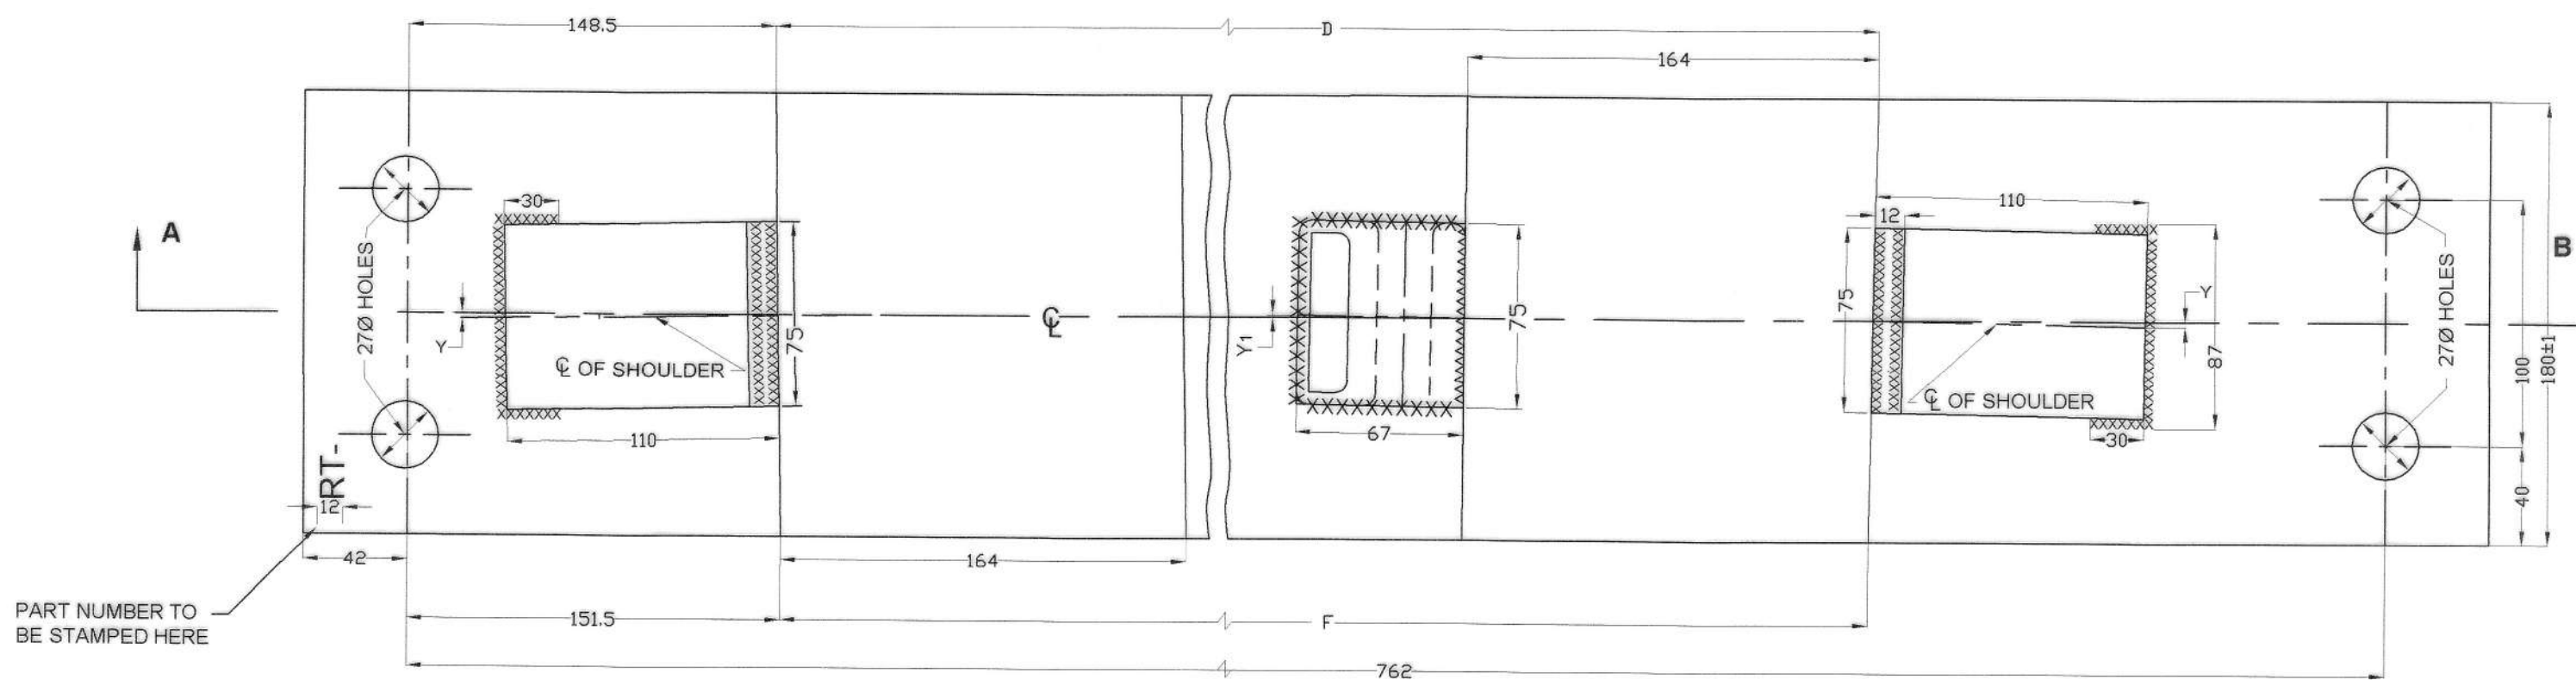

PLAN

4. DIMENSION GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATE.
3. A TOLERANCE OF 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

3. IRS: T-10
2. IS:2062: 2011 (REAFFIRMED YEAR:2016)
1. IRS: WELDED BRIDGE CODE FOR WELDING

NOT TO SCALE

- | | |
|----|--|
| 2. | <u>REVISED & REDRAWN</u> |
| | GROOVED RUBBER SOLE PLATES REPLACED WITH
NYLON CORD REINFORCED GRSP |

20-09-2021

ONE EACH	10125 mm CURVED SWITCH WITH ZU-1-60 THICK - WEB TONGUE RAIL FOR 1 IN 12 TURNOUT B.G. (1673 mm) FOR 60 KG (UIC) ON PSC SLEEPER	RDSO/T-6155
----------	---	-------------

No.	DESCRIPTION	No.
OFF	FOR DRAWING	

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA
AND SHALL NOT BE USED, COPIED OR REPRODUCED IN
PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R.	D.	S.	O.
----	----	----	----

**SPECIAL FLAT BEARING PLATES
FOR 10125 mm CURVED SWITCH
WITH ZU-1-60 THICK-WEB TONGUE
RAILS B.G. (1673 mm) FOR 60 kg
(UIC) ON P.S.C. SLEEPERS.**

STAND	ADVANCE	(T)
CANCLD	28.11.2002	
REV		

<u>DIMENSIONS</u>					
SLEEPER NO.	PART NO.	DIMENSIONS (mm)			
		D	F	Y	Y ₁
25	RDSO/T-6177	407	401	1.84	1.12
26	RDSO/T-6178	425.5	419.5	1.91	1.16
27	RDSO/T-6179	445	438.5	1.98	1.21

ONE EACH	10125 mm CURVED SWITCH WITH ZU-1-60 THICK - WEB TONGUE RAIL FOR 1 IN 12 TURNOUT B.G. (1673 mm) FOR 60 KG (UIC) ON PSC SLEEPER		RDSO/T- 6155
No. OFF	DESCRIPTION	No.	
	FOR DRAWING		
THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW-226011, INDIA AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.			
R. D. S. O.			
SPECIAL FLAT BEARING PLATES FOR 10125 mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G. (1673 mm) FOR 60 kg (UIC) ON P.S.C. SLEEPERS.			
STAND- CANC.LD- REV-	ADVANCE 28.11.2002		(T)
RDSO/T-6177 TO RDSO/T-6179			