TABLE OF SLEEPERS AND THEIR FITTINGS

S. No. OF SLEEPER	SLEEPER TO DRG. No.	LENGTH (mm)	WEDGE TO DRG. No. RDSO/T-		LEAF SPRING RDSO/T- 6304	TIE PLATE ONE SET OF RDSO/T- ________ TO RDSO/T- ________	Nos. NYLON CORD REINFORCED GRSP TO DRG. No.			24 DIA. PLATE SCREW TO DRG. No. RDSO/T- 3912	INSULATING LINER TO DRG. No. RDSO/T- 3706	ELASTIC RAIL CLIP TO DRG. No. RDSO/T- 3701	SLIDE CHAIR TO DRG. No. RDSO/T- 6288	SINGLE COIL SPRING WASHER TO DRG. No. T 10773	M.S. PLATE TO DRG. No. RDSO/T- 3901	METAL LINER RDSO/T-3740	ELASTIC RAIL CLIP RDSO/T-5919
			6305	6305/A			RDSO/T- 8889/ 8954/8955	RDSO/T- 8911	RDSO/T- 8906								
1 & 2	RDSO/T- 4512	2750	--	--	--	--	4 (8889)	--	--	4	8	8	--	4	--	--	--
3	RDSO/T- 4793	3750	--	2	2	6281 TO 6281/2	2 (8954)	2	2	14	--	--	--	14	--	2	2
4	RDSO/T- 4794	3750	2	--	2	--	2 (8955)	2	2	12	--	--	2	12	1	2	2
5	RDSO/T- 4795	2750	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
6	RDSO/T- 4796	2750	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
7	RDSO/T- 4797	2750	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
8	RDSO/T- 4798	2750	2	--	2	6275/3 TO 6275/4	2 (8955)	2	--	8	--	--	2	8	--	2	2
9	RDSO/T- 4799	2750	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
10	RDSO/T- 4800	2750	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
11	RDSO/T- 4801	2770	2		2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
12	RDSO/T- 4802	2790	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2
13	RDSO/T- 4803	2820	2	--	2	--	2 (8955)	2	--	8	--	--	2	8	--	2	2

S. No. OF SLEEPER	SLEEPER TO DRG. No.	LENGTH (mm)	NYLON CORD REINFORCED GRSP TO DRG. No. RDSO/T-						SPECIAL FLAT BEARING PLATE TO DRG. No. RDSO/T-	SINGLE COIL SPRING WASHER TO DRG. No. T 10773	ELASTIC RAIL CLIP TO DRG. No. RDSO/T- 3701	INSULATING LINER TO DRG. No. RDSO/T- 3706	24 DIA. PLATE SCREW TO DRG. No. RDSO/T- 3912
			8955	8887	8907	8913	8922	8923					
14	RDSO/T- 4804	2840	2	--	2	2	--	--	RDSO/T- 6289 & RDSO/T- 6290	8	4	4	8
15	RDSO/T- 4805	2870	--	--	--	2	2	--	RDSO/T- 6291 & RDSO/T- 6292	8	4	4	8
16	RDSO/T- 4806	2900	--	--	--	2	--	2	RDSO/T- 6293 & RDSO/T- 6294	8	4	4	8
17	RDSO/T- 4807	2930	--	4	--	--	--	--	--	--	6	6	--
18	RDSO/T- 4808	2960	--	4	--	--	--	--	--	--	8	8	--
19	RDSO/T- 4809	2990	--	4	--	--	--	--	--	--	8	8	--
20	RDSO/T- 4810	3020	--	4	--	--	--	--	--	--	8	8	--
21	RDSO/T- 4811	3060	--	4	--	--	--	--	--	--	8	8	--
22	RDSO/T- 4812	3100	--	4	--	--	--	--	--	--	8	8	--

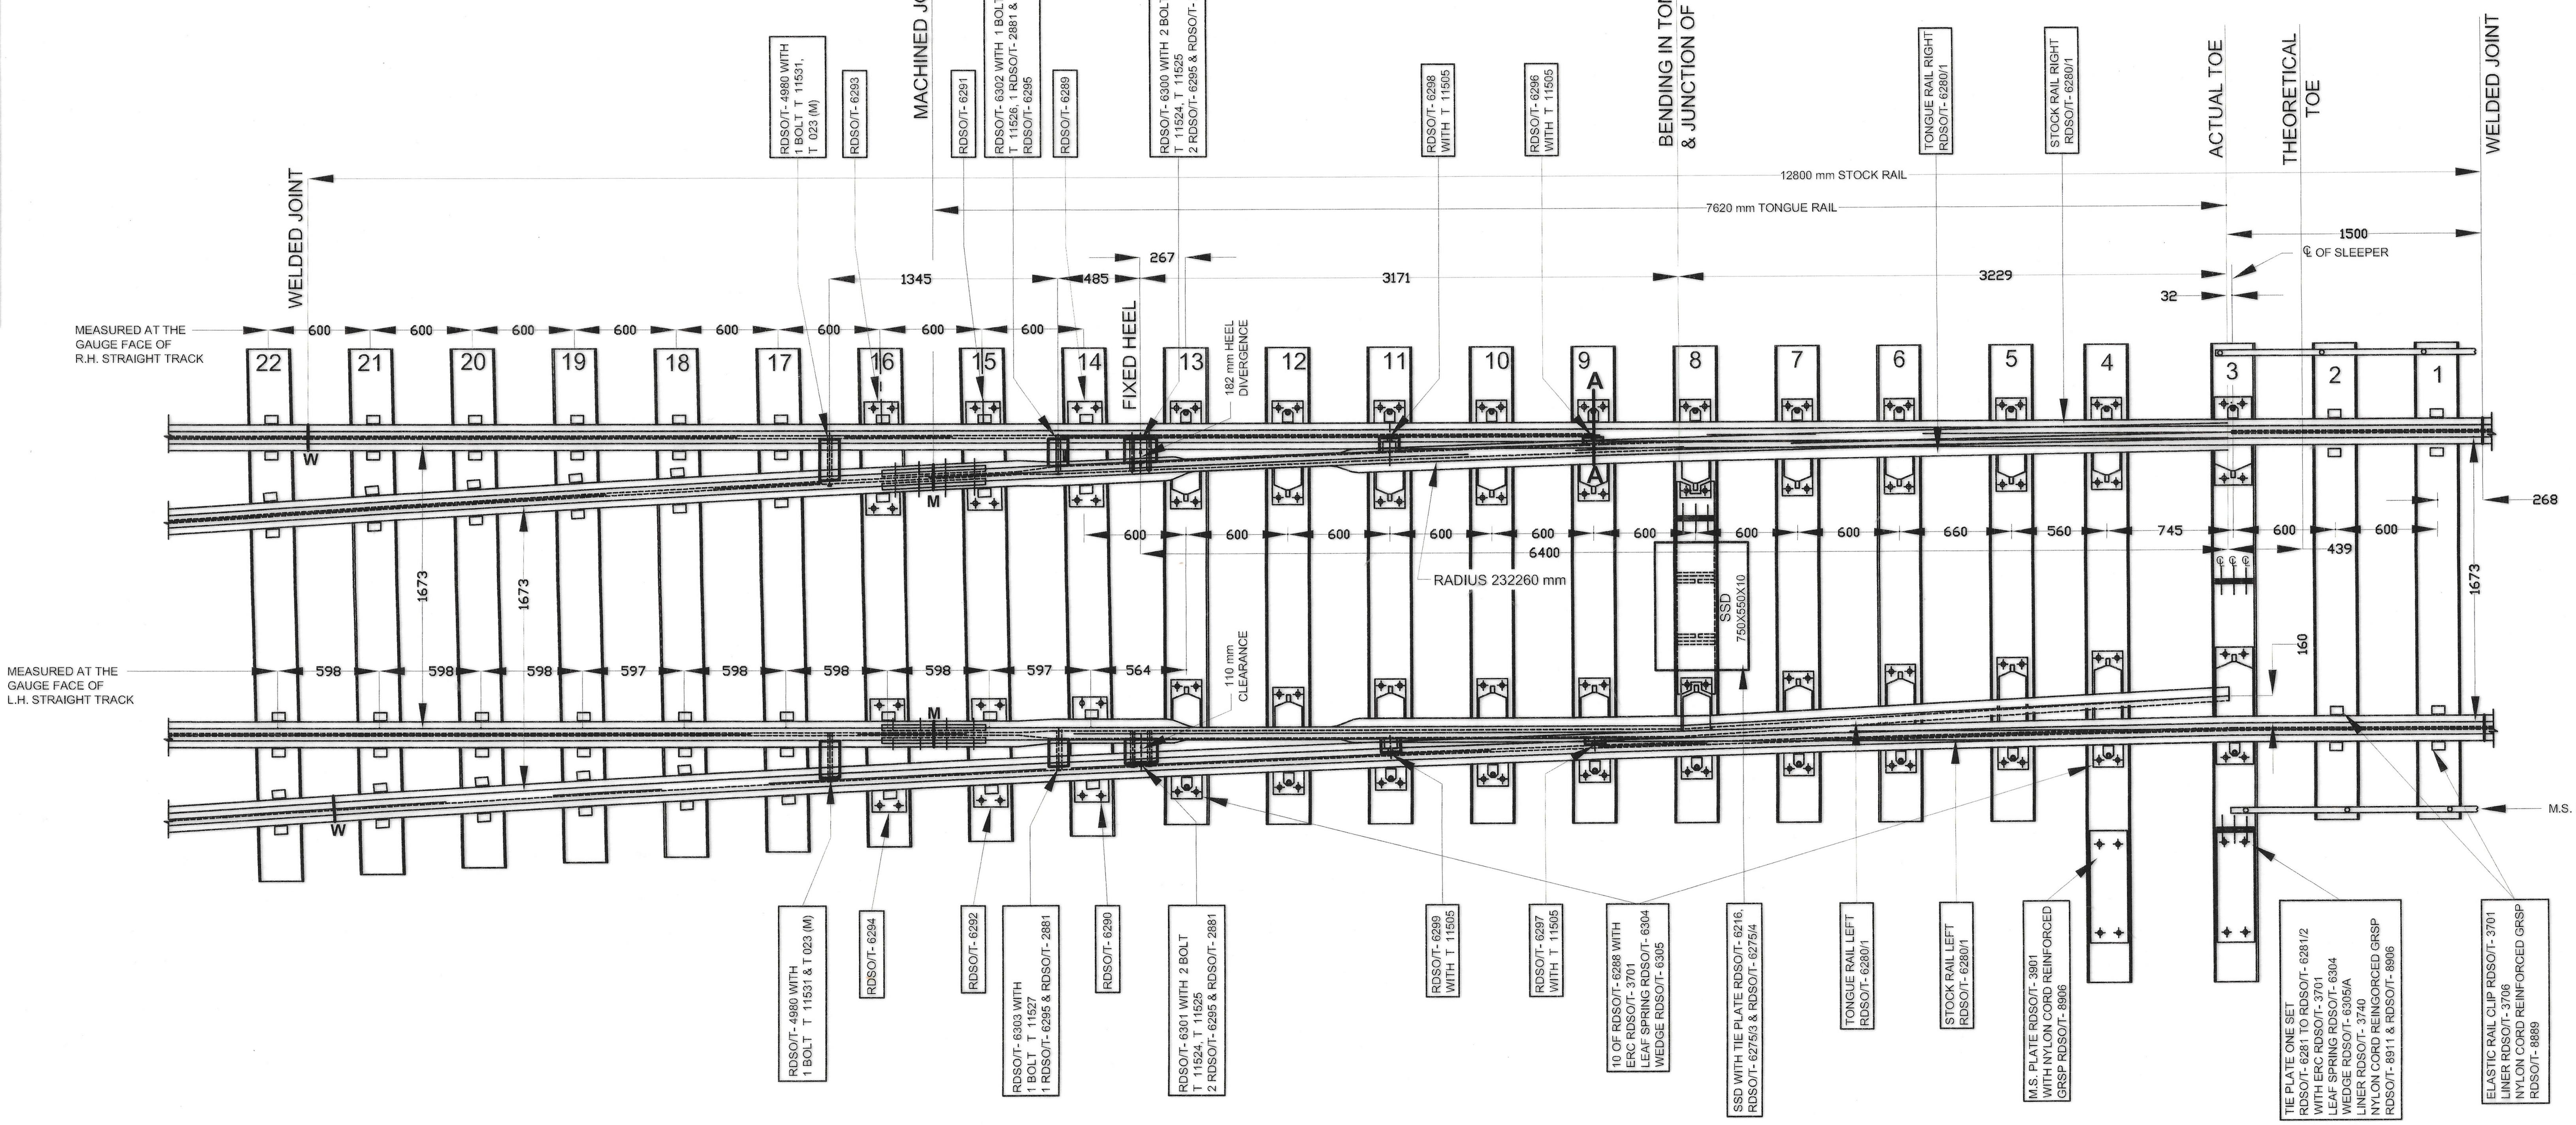
WELDED JOINT
MACHINED JOINT
FIXED HEEL
BENDING IN TONGUE RAIL & JUNCTION OF RAIL HEAD
ACTUAL TOE
THEORETICAL TOE
WELDED JOINT
RDSO/T- 4980 WITH 1 BOLT T 11531, T 023 (M)
RDSO/T- 6293
RDSO/T- 6291
RDSO/T- 6302 WITH 1 BOLT T 11526, 1 RDSO/T- 2881 & RDSO/T- 6295
RDSO/T- 6289
RDSO/T- 6300 WITH 2 BOLT T 11524, T 11525 2 RDSO/T- 6295 & RDSO/T- 2881
RDSO/T- 6298 WITH T 11505
RDSO/T- 6296 WITH T 11505
TONGUE RAIL RIGHT RDSO/T- 6280/1
STOCK RAIL RIGHT RDSO/T- 6280/1
12800 mm STOCK RAIL
7620 mm TONGUE RAIL
1500
℄ OF SLEEPER
1345
485
267
3171
3229
32
600
182 mm HEEL DIVERGENCE
MEASURED AT THE GAUGE FACE OF R.H. STRAIGHT TRACK
MEASURED AT THE GAUGE FACE OF L.H. STRAIGHT TRACK
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
A
W
M
660
560
745
439
6400
RADIUS 232260 mm
SSD
1673
268
598
597
564
116 mm CLEARANCE
160
M.S. FLAT TIE BAR RDSO/T- 4711 ON BOTH ENDS
RDSO/T- 4980 WITH 1 BOLT T 11531 & T 023 (M)
RDSO/T- 6294
RDSO/T- 6292
RDSO/T- 6303 WITH 1 BOLT T 11527 1 RDSO/T-6295 & RDSO/T- 2881
RDSO/T- 6290
RDSO/T- 6301 WITH 2 BOLT T 11524, T 11525 2 RDSO/T- 6295 & RDSO/T- 2881
RDSO/T- 6299 WITH T 11505
RDSO/T- 6297 WITH T 11505
10 OF RDSO/T- 6288 WITH ERC RDSO/T- 3701 LEAF SPRING RDSO/T- 6304 WEDGE RDSO/T- 6305
SSD WITH TIE PLATE RDSO/T- 6216, RDSO/T- 6275/3 & RDSO/T- 6275/4
TONGUE RAIL LEFT RDSO/T- 6280/1
STOCK RAIL LEFT RDSO/T- 6280/1
M.S. PLATE RDSO/T- 3901 WITH NYLON CORD REINFORCED GRSP RDSO/T- 8906
TIE PLATE ONE SET RDSO/T- 6281 TO RDSO/T- 6281/2 WITH ERC RDSO/T- 3701 LEAF SPRING RDSO/T- 6304 WEDGE RDSO/T- 6305/A LINER RDSO/T- 3740 NYLON CORD REINGORCED GRSP RDSO/T- 8911 & RDSO/T- 8906
ELASTIC RAIL CLIP RDSO/T- 3701 LINER RDSO/T- 3706 NYLON CORD REINFORCED GRSP RDSO/T- 8889

SWITCH ANGLE AT TOE---------0°- 46' - 59"
DIVERGENCE AT HEEL-------- 182 mm
THROW AT TOE -----------------160 mm
GAUGE-----------------------------------1673 mm
RADIUS----------------------------------232260 mm

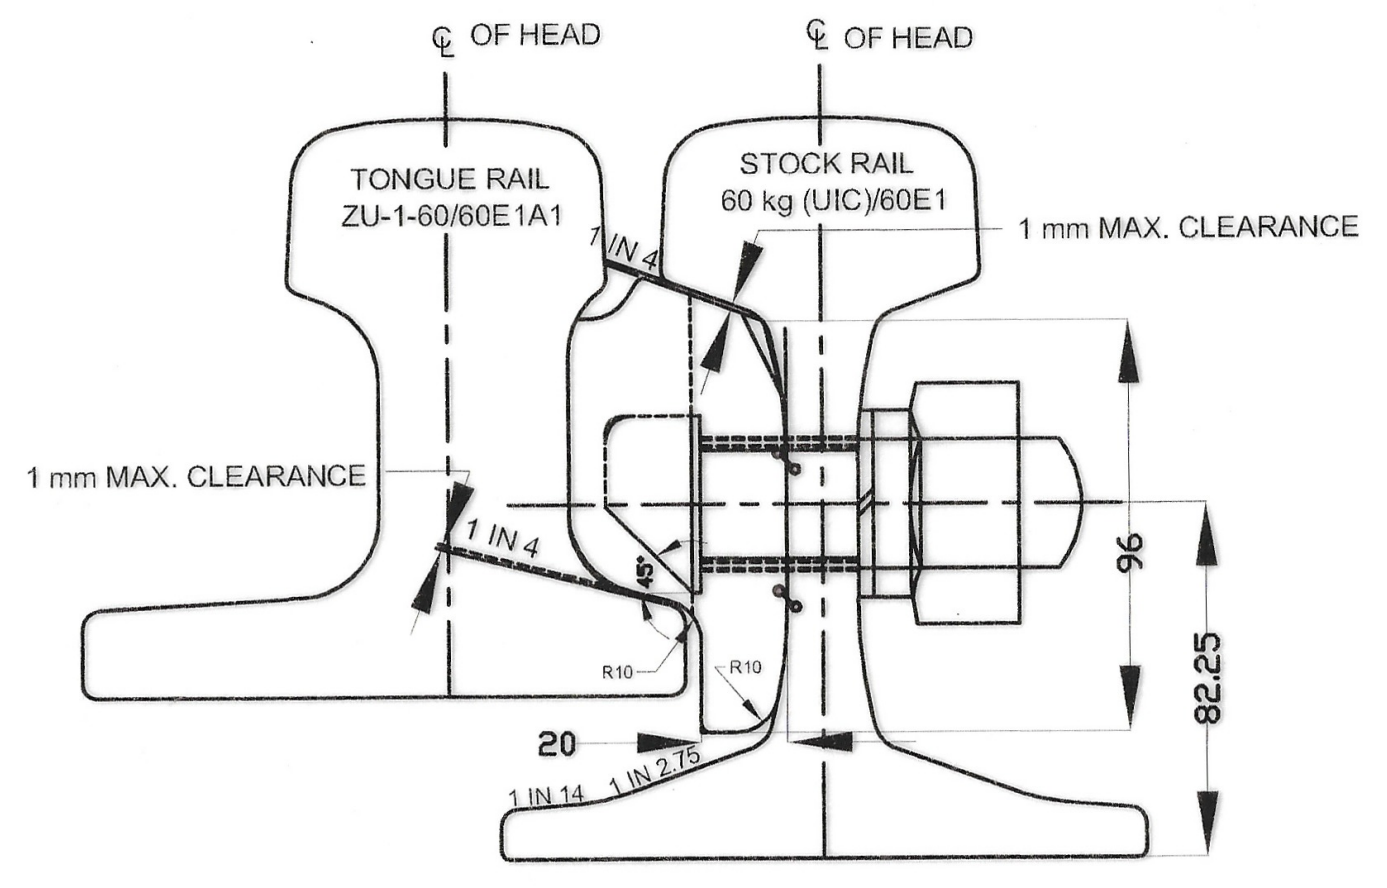

SECTION AT A-A

13. THE PART LIST OF THIS DRAWING DOES NOT INCLUDE FITTINGS FOR APPROACH SLEEPERS. THESE SHOULD BE INDENTED SEPARATELY, IF REQUIRED.
12. HOLES FOR ADDITIONAL DISTANCE BLOCKS TO DRG. No. RDSO/T- 4980 IN LEAD RAILS WILL NORMALLY BE DRILLED AT SITE.
11. THE JOINT AHEAD OF ACTUAL TOE SHALL BE AN ALUMINO-THERMIC WELDED JOINT. A MACHINED JOINT TO DRG. No. RDSO/T- 2594 MAY BE PROVIDED AS A PURELY TEMPORARY MEASURE PRIOR TO SITE WELDING OF THE JOINT.
10. SINGLE COIL SPRING WASHERS TO DRG. No. T 10773 SHALL BE USED WITH ALL BOLTS OF 25 mm DIA.
9. THE FISH PLATED JOINTS SHOWN IN THE LAYOUT ARE MACHINED JOINTS TO DRAWING No. RDSO/T- 2594. THE END FACES OF THE RAILS AT THESE JOINTS SHALL BE MACHINED TRUE & SQUARE. THE RAILS SHALL HAVE 26.5 mm DIA. EXACT HOLES LOCATED AT 83 mm & 249 mm FROM THE END.
8. THE HEADS OF BOLTS T 11524 TO T 11527 USED WITH BLOCKS SHALL BE LOCATED INSIDE THE TRACK GAUGE. THE WIDTH OF HEAD OF THESE BOLTS SHALL BE REDUCED BY 4 mm BY MACHINING ON ONE SIDE TO ENABLE FITMENT.
7. P.S.C SLEEPERS USED IN THIS SWITCH ARE IDENTICAL TO THOSE USED IN 6400 mm CURVED SWITCH TO DRG. No. RDSO/T- 4966.
6. AT SLEEPER No. 9, ONE SIDE 45° BEVEL CUT HEAD BOLT T 11505 SHALL BE USED TO FASTEN SLIDE BLOCK WITH STOCK RAIL AS PER SECTION A-A.
5. THE STOCK RAIL ARE TO BE SUPPLIED BY THE MANUFACTURER. SLIDE BLOCKS SHALL BE BOLTED TO THE RESPECTIVE STOCK RAIL AND C.I. HEEL BLOCKS BOLTED IN PLACE AND THE TOE END OF THE TONGUE RAIL SHALL BE LASHED TO THE STOCK RAIL, WITH STOUT WIRE.
4. SLIDE CHAIRS AND BOLTS ARE SAME FOR BOTH SIDES.
3. THOSE BOLTS WHICH ARE SKEW TO THE RAILS SHALL HAVE SPHERICAL WASHERS T 023 (M) & TAPERED PACKING PIECES RDSO/T- 6295 SHOWN ON THE DRAWING THUS -- ■.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

24. LEVER OF S.S.D. SHALL BE FIXED IN 28 DIA. HOLES DRILLED IN FOOT OF BOTH TONGUE RAILS NEAR J.O.H. ALONG WITH INSULATING BUSH
23. THE CURVED TONGUE & STOCK RAILS SHALL BE GIVEN THE CORRECT BEND AS SHOWN IN DRG. No. RDSO/T- 6279 BY THE MANUFACTURER BEFORE DESPATCH FROM HIS WORKS. WHILE INDENTING FOR THE TURNOUTS, THE RAILWAY SHALL CLEARLY INDICATE THE NUMBER OF L.H. & R.H. TURNOUTS REQUIRED BY THEM. AS THE CURVATURE OF TONGUE & STOCK RAILS GIVEN BY THE MANUFACTURER IS LIKELY TO GET DISTURBED DURING TRASIT TO THE SITE, THE SAME SHALL BE CHECKED & RECTIFIED BY THE SSE/(P.WAY) WHILE LAYING IN THE TRACK.
22. SLEEPER No. 14 AND ONWARD ARE LAID IN FANSHAPE.
21. A SPRING SETTING DEVICE (S.S.D.) IS TO BE PROVIDED NEAR JUNCTION OF RAIL HEADS (J.O.H).
20. OPERATION OF SWITCH IS TO BE CARRIED OUT ELECTRICALLY NEAR TOE OF SWITCH.
19. CLAMP POINT LOCK TO DRG. No. RDSO/S- 3454, ALT- A (Ver. 1) SHALL BE USED BETWEEN SLEEPER No. 3 & 4 ALONG WITH 220 mm STROKE IRS POINT MACHINE.
18. WHEN THIS ASSEMBLY IS USED WITH 1 IN 8.5 CMS CROSSING TO DRG. No. RDSO/T- 4967, THE CHECK RAIL SHALL BE PROCURED ALONG WITH COMPONENTS OF THIS SUB-ASSEMBLY.
17. THE HEAD,WEB AND FOOT OF EACH RAIL SHALL BE ULTRASONICALLY TESTED BY THE MANUFACTURER THROUGH A COMPETENT PERSON BEFORE USING THE RAILS FOR MANUFACTURE. A PERSON POSSESSING A COMPETENCY CERTIFICATE ISSUED BY DIRECTOR GENERAL (M & C) RDSO SHALL BE DEEMED A COMPETENT PERSON.
16. HOLES OF 26.5 mm DIA. AT THE ENDS OF RAILS USED FOR MANUFACTURE OF SWITCHES & CROSSINGS SHALL BE CHAMFERED BY THE MANUFACTURER. FOR THIS PURPOSE, CHAMFERING TOOLS TO DRG. No. RDSO/T- 5210 TO RDSO/T- 5212 SHALL BE USED.
15. NYLON CORD REINFORCED GRSP SHALL BE USED UNDER SLIDE CHAIRS, TIE PLATES AND SPECIAL BEARING PLATES AS SHOWN IN THE TABLE ALONG SIDE.
14. SINGLE COIL SPRING WASHERS TO DRG. No. T 10773 SHALL BE USED WITH ALL PLATE SCREWS TO DRAWING No. RDSO/T- 3912.

NOTE

PART	DESCRIPTION	No. OFF
RDSO/T- 5919	ELASTIC RAIL CLIP MK-V	22
RDSO/T- 3740	METAL LINER	22
RDSO/T- 8923	NYLON CORD REINFORCED GRSP	2
RDSO/T- 8922	NYLON CORD REINFORCED GRSP	2
RDSO/T- 6275/3 & RDSO/T- 6275/4	INSULATED TIE PLATE FOR SSD	ONE SET
RDSO/T- 3701	ELASTIC RAIL CLIPS	66
T 023(M)	SPHERICAL WASHERS	2
RDSO/T- 6305/A	WEDGE	2
RDSO/T- 6305	WEDGE	20
RDSO/T- 6304	LEAF SPRING	22
RDSO/T- 4018	CHECK RAILS	2
RDSO/T- 4711	M.S. FLAT TIE BAR	2
RDSO/T- 3901	M.S. PLATE	1
RDSO/T- 3706	INSULATING LINER	66
T 11524	BOLTS 25X290	2
T 11525	BOLTS 25X300	2
T 11526	BOLTS 25X310	1
T 11527	BOLTS 25X320	1
T 11531	BOLTS 25X360	2
RDSO/T- 8955	NYLON CORD REINFORCED GRSP	22
RDSO/T- 8954	NYLON CORD REINFORCED GRSP	2
RDSO/T- 8889	NYLON CORD REINFORCED GRSP	4
RDSO/T- 8887	NYLON CORD REINFORCED GRSP	24
RDSO/T- 8913	NYLON CORD REINFORCED GRSP	6
RDSO/T- 8911	NYLON CORD REINFORCED GRSP	22
RDSO/T- 8906	NYLON CORD REINFORCED GRSP	4
RDSO/T- 8907	NYLON CORD REINFORCED GRSP	2
T 10773	SINGLE COIL SPRING WASHERS	138
RDSO/T- 1899	FISH BOLTS	8
RDSO/T- 1898	FISH PLATES	4
RDSO/T- 6288	SLIDE CHAIR	20
RDSO/T- 3912	PLATE SCREW	126
T 11505	BOLTS FOR SLIDE BLOCK 25X100	4
RDSO/T- 6281 TO RDSO/T- 6281/2	INSULATED TIE PLATE (EXTENDED)	ONE SET
RDSO/T- 6306	M.S. SHOULDERS	22
RDSO/T- 6296 & RDSO/T- 6299	SLIDE BLOCKS	ONE EACH
RDSO/T- 4980	DISTANCE BLOCKS	2
RDSO/T- 6302 & RDSO/T- 6303	DISTANCE BLOCKS	ONE EACH
RDSO/T- 6300 & RDSO/T- 6301	HEEL BLOCKS	ONE EACH
RDSO/T- 6289 TO RDSO/T- 6294	BEARING PLATE	ONE EACH
RDSO/T- 6295	PACKING PIECES	6
RDSO/T- 2881	PACKING PIECES (PLANE)	6
RDSO/T- 6216	SPRING SETTING DEVICE	1
RDSO/T- 6217 TO RDSO/T- 6217/39	DETAIL OF SPRING SETTING DEVICE	1
RDSO/T- 6280/1	TONGUE RAIL LEFT	1
RDSO/T- 6280/1	TONGUE RAIL RIGHT	1
RDSO/T- 6280/1	STOCK RAIL LEFT	1
RDSO/T- 6280/1	STOCK RAIL RIGHT	1

SPECIFICATION	SCALE	ALT:	DESCRIPTION	DATE
IRS: T 10	NOT TO SCALE	04.	REVISED & REDRAWN ii) ELASTIC RAIL CLIPS MK-III ARE REPLACED WITH ELASTIC RAIL CLIPS MK-V AT SLEEPER No. 03 TO 13 i) INSULATING LINERS ARE REPLACED WITH METAL LINERS AT SLEEPER No. 03 TO 13	22.05.2023

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA
AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

6400 mm CURVED SWITCH WITH ZU-1-60/60E1A1 THICK-WEB TONGUE RAILS FOR 1 IN 8.5 TURNOUT B.G. (1673 mm) FOR 60 kg (UIC)/60E1 ON P.S.C. SLEEPERS

STAND.________
CANCLD.________
REVD.________

ADVANCE
24-02-2004
(T)

RDSO/T- 6280

FILE S.No.: CT/PTX/TWS/DESIGN n.p. No. 12 TO 14 (Sl. No. 530 TO --------)
C.R.No. PAGES: NIL
DRG: BY: Anurag Bajpai ANURAG BAJPAI (JE/Track)
DRG: CH: RAM MOHAN (SSE/Track)
S.K. SAGAR (SSE/Track)
ADE/T/P & C: VIRPAL SINGH
APPD: DST-III: SACHIN VERMA