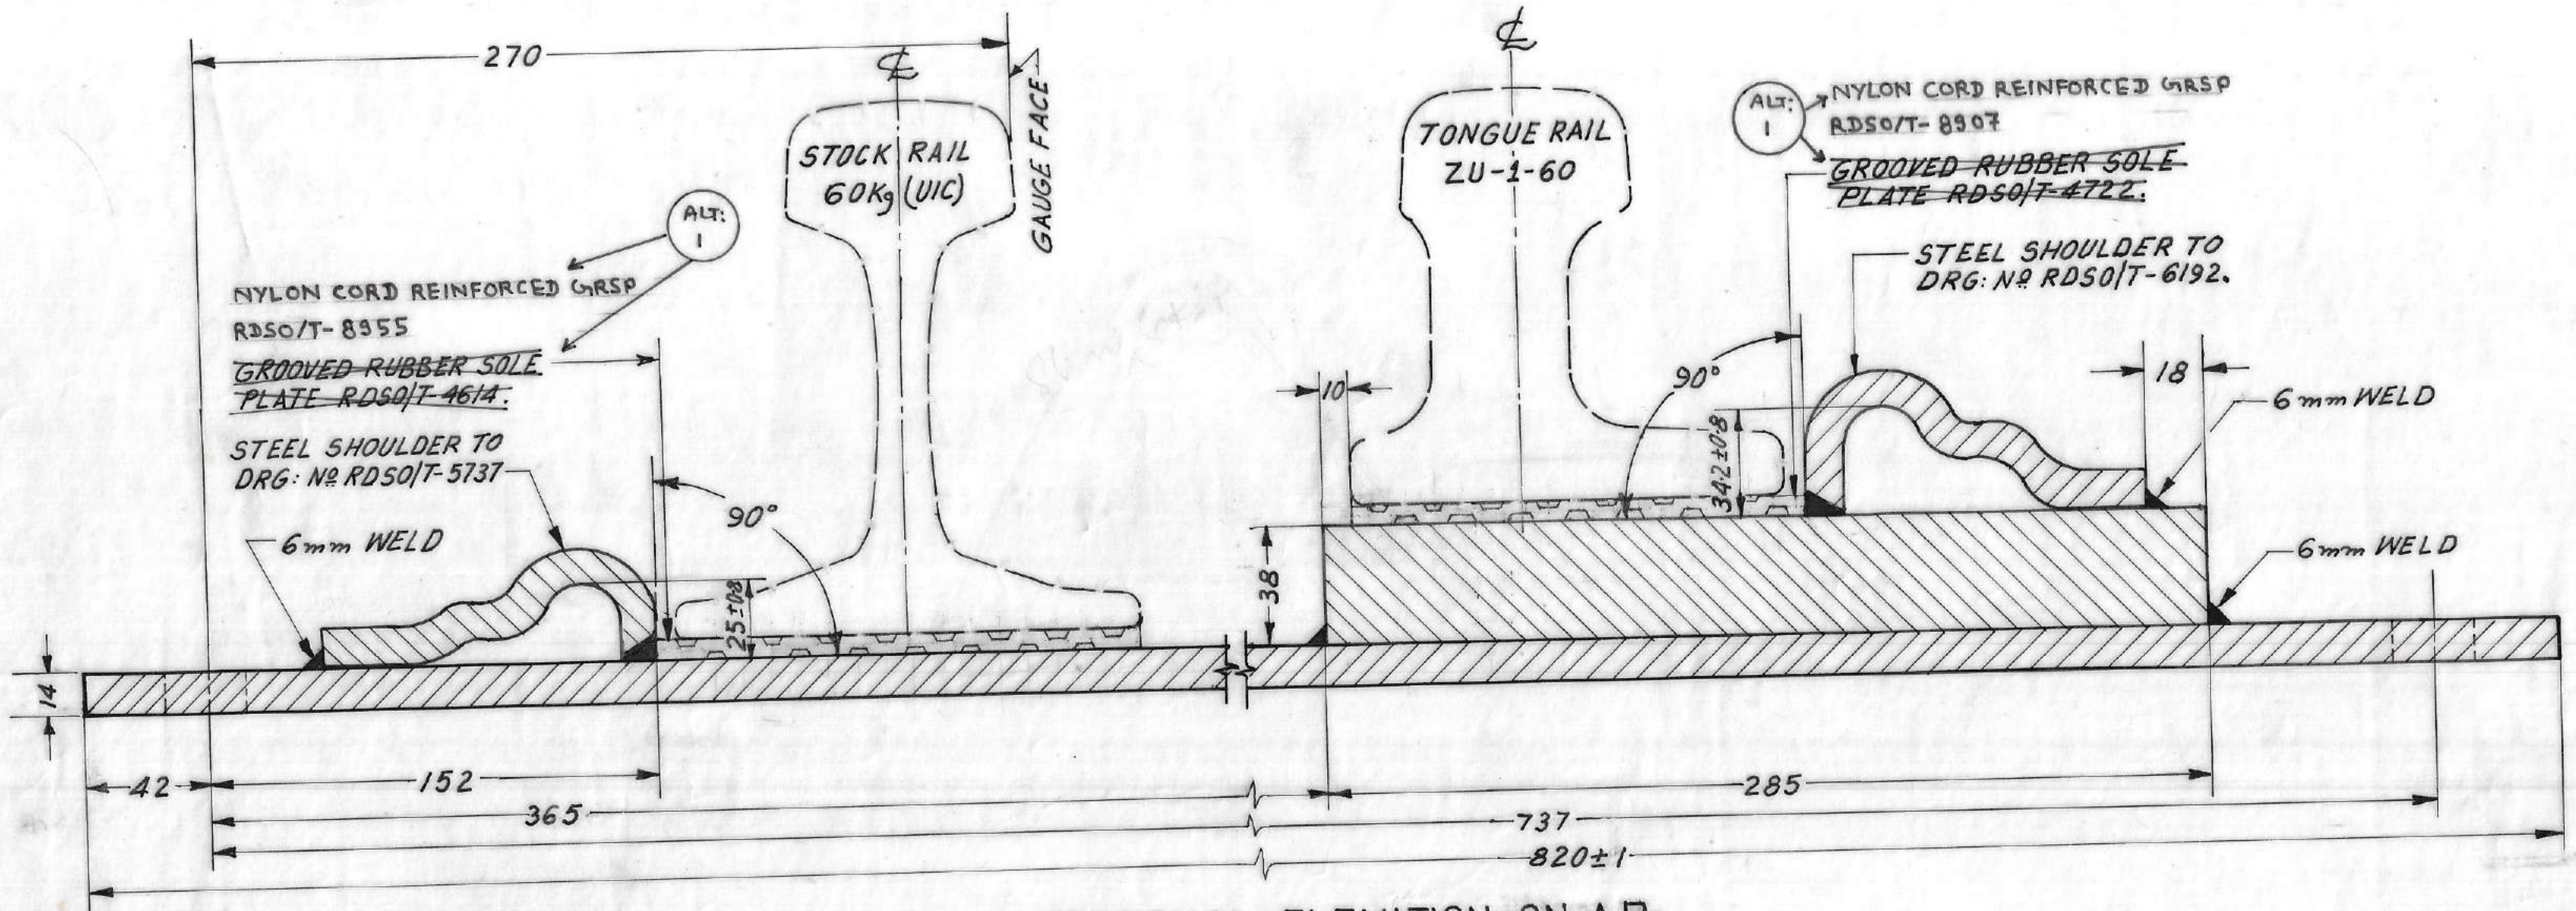
270
℄
STOCK RAIL
60Kg (UIC)
GAUGE FACE
ALT: 1
NYLON CORD REINFORCED GRSP
RDSO/T-8955
~~GROOVED RUBBER SOLE PLATE RDSO/T-4614.~~
STEEL SHOULDER TO DRG: Nº RDSO/T-5737
6mm WELD
90°
25±0.8
14
42
152
365
℄
TONGUE RAIL
ZU-1-60
ALT: 1
NYLON CORD REINFORCED GRSP
RDSO/T-8907
~~GROOVED RUBBER SOLE PLATE RDSO/T-4722.~~
STEEL SHOULDER TO DRG: Nº RDSO/T-6192.
10
90°
34.2±0.8
18
6mm WELD
6mm WELD
38
285
737
820±1

SECTIONAL ELEVATION ON A.B.

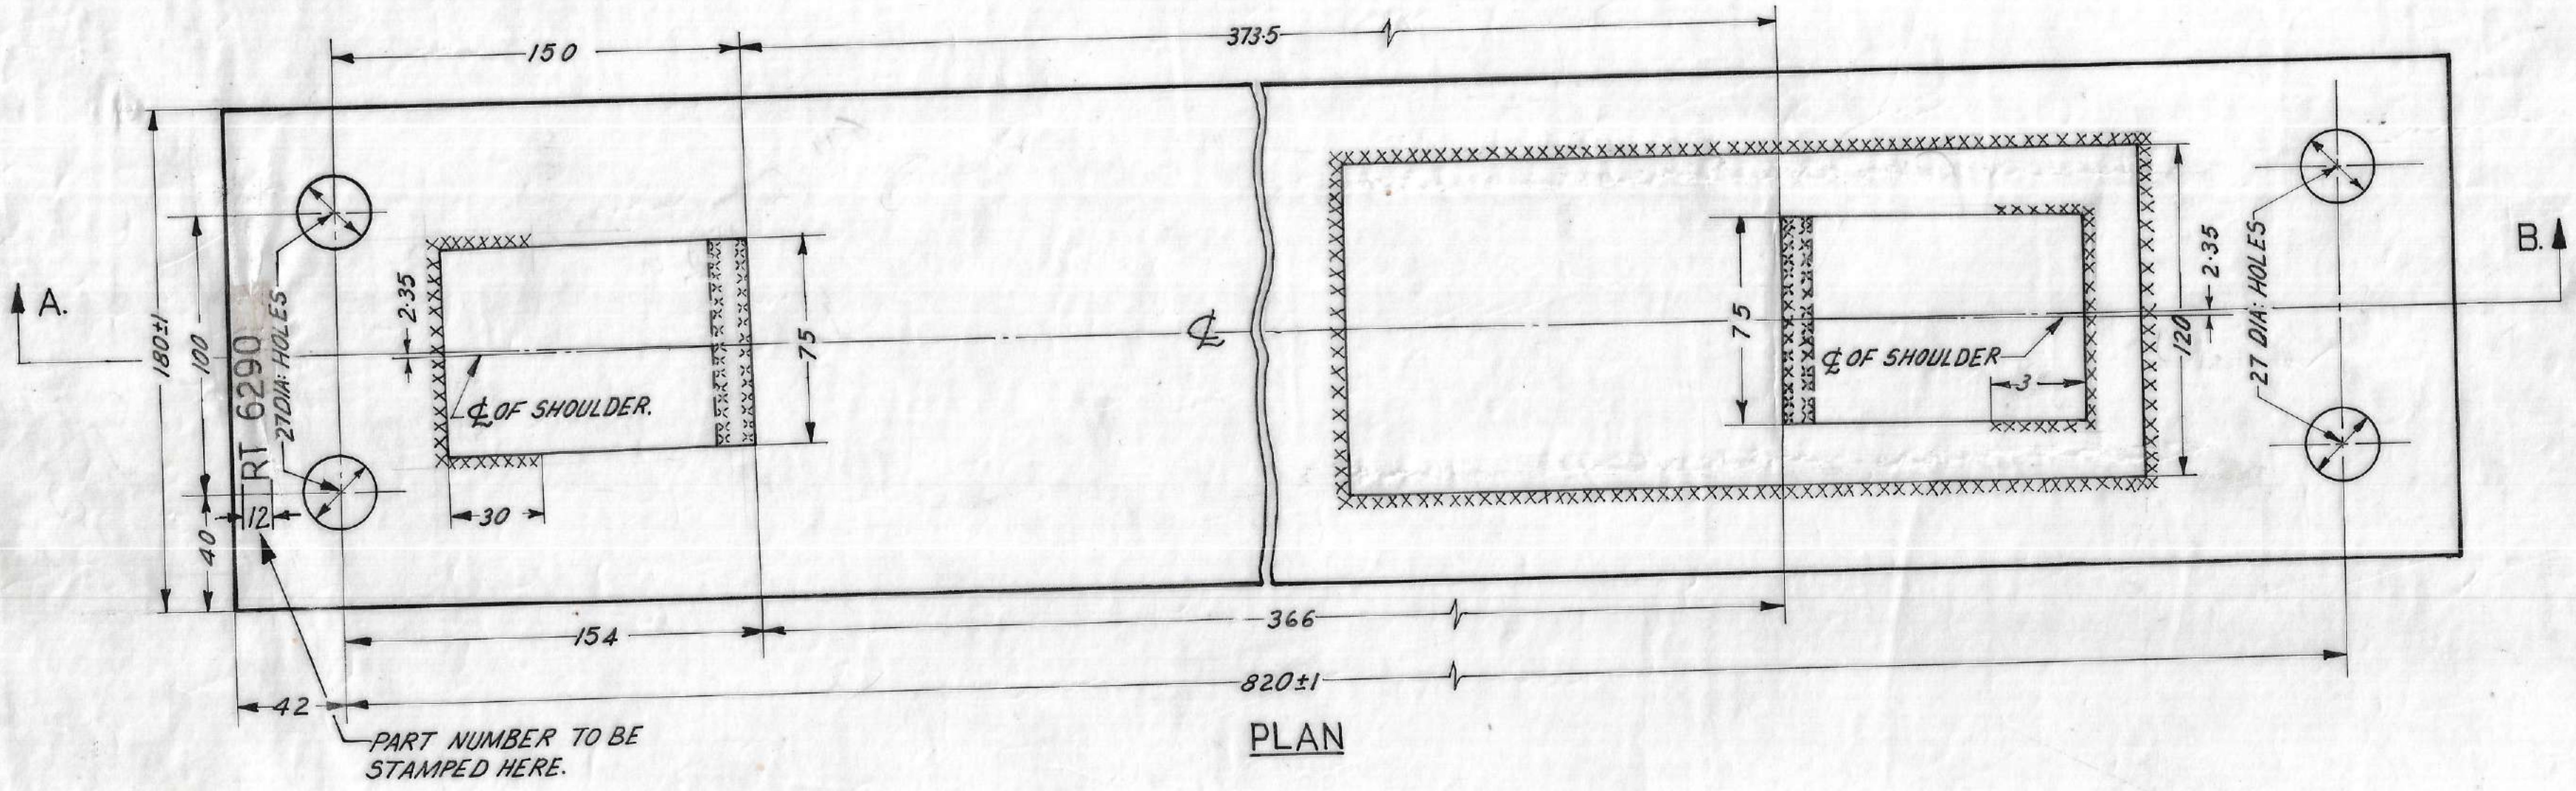

PLAN

5. MIG PROCESS OF WELDING TO BE ADOPTED.
4. DIMENSIONS GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATE.
3. A TOLERANCE OF 0.8mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTE

3. IRS. T 10.
2. IS: 2062-1999. Gr.- B
1. IRS. WELDED BRIDGE CODE FOR WELDING.

SPECIFICATION

MILLIMETRES
20 0 20 40 60 80

SCALE

ALT:	DESCRIPTION	DATE
1.	GROOVED RUBBER SOLE PLATES REPLACED WITH NYLON CORD REINFORCED GRSP	20-09-21

Nº OFF	DESCRIPTION	Nº
1 EACH	6400mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAIL FOR 1IN8.5 TURN-OUT B.G.(1673mm) FOR 60Kg (UIC) ON P.S.C. SLEEPERS.	RDSO/T-6280

FOR DRAWING

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA.
AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

SPECIAL FLAT BEARING PLATE FOR 6400mm CURVED SWITCH WITH ZU-1-60 THICK-WEB TONGUE RAILS B.G.(1673mm) FOR 60Kg (UIC) ON P.S.C. SLEEPERS.

STAND. ----------
CANCLD. ----------
REVD. ----------
ADVANCE
24-02-2004
(T)

RDSO/T-6290

FILE	CT/PTX/TWS	C.R.Nº	TDIC/T/03/022	CAL:		CAL:		DRG:		DRG:		TRC:		TRC:		S.E./T		DDS/F	24/2/04
PAGE	DESIGN 19 TO 21	PAGES	33 TO 37	BY	R.L.WAGHMARE	CH:	V.R.SARSWAT	BY	P.K.BOSE	CH:	M.N.U.FARIDI	BY.	P.K.BOSE	CH:	V.R.SARSWAT		R.L.WAGHMARE	IV	P.UPADHYAY