GENERAL NOTE ON THE DESIGN

1. BENDS:

1.1. R.H. & L. H. STOCK RAILS:

FOR THE L.H. TURNOUT,THE L. H. STOCK RAIL IS GIVEN A CURVATURE OF 783320 mm AND THE R. H. STOCK RAIL IS LAID STRAIGHT. THE REVERSE IS THE CASE THE FOR R. H. TURNOUT.

1.2. R.H. & L.H. TONGUE RAILS:

THE RAIL IS FIRST BENT THROUGH 51 mm AT POINT 'F' SO THAT AT THE TOE 'E', THE CENTRE LINE OF HEAD OF TONGUE RAIL IS 15 mm OUTSIDE THE GAUGE LINE OF STOCK RAIL (i.e. TOWARDS CENTRE LINE OF TRACK). AGAIN, AFTER THE PLANING OF THE OUTSIDE HEAD HAS BEEN CARRIED OUT IN STAGES AS EXPLAINED IN 2.2.2. BELOW, THE WHOLE OF THE RAIL LENGTH IS SPRUNG TO A RADIUS OF 784993 mm (CONCAVE OUTSIDE) AND SECURELY CLAMPED IN THIS POSITION TO ENABLE PLANING ON THE INSIDE FOOT & HEAD TO BE CARRIED OUT AS EXPLAINED IN 2.2.3. & 2.2.4. BELOW.

2. PLANING:

2.1. R.H. & L.H. STOCK RAILS:

2.1.1. OUTSIDE HEAD & FOOT (i.e. OUTSIDE GAUGE)

NO PLANING IS REQUIRED.

2.1.2. INSIDE HEAD:

THE HEAD PLANING COMMENCES AT 'A' & ENDS AT 'D' BETWEEN POINTS 'B' & 'C'. THE PLANING IS UNIFORM AS SHOWN IN SECTION AT 'C'. THE SIDE OF THE HEAD IS CHAMFERED INWARD AT 1 IN 4 BATTER FROM A POINT 20 mm BELOW TOP OF HEAD. THE PLANING IS RUNOUT STRAIGHT TO ZERO VALUE BETWEEN 'A' & 'B' AND 'C' & 'D'.

2.1.3. INSIDE FOOT:

NO PLANING IS REQUIRED.

2.2. R.H. & L.H. TONGUE RAILS:

2.2.1. OUTSIDE FOOT :

ONLY RELIEF-PLANING IS TO BE DONE AS DESCRIBED IN 2.2.3 BELOW.

2.2.2. OUTSIDE HEAD:

THE PLANING IS IN STAGES. THE PLANING OF THE TOP OF HEAD BEGINS AT 'E' AND ENDS AT 'G'. IN THIS PLANING, THE HEAD IS PLANED DOWN BY 8.5 mm AT 'E.' THE PLANING OF THE SIDE OF HEAD BEGINS AT 'E' AND ENDS AT 'F.' IN THIS PLANING, THE SIDE HAS AN OUTWARD BATTER OF 1 IN 4. AND THE CORNERS ARE ROUNDED OFF (SEE TEMPLATE 'X'). TEMPLATE 'X' IS DRAWN ON THE END OF THE RAIL AT 'E' AND PLANING GOES STRAIGHT FROM 'E' TO 'G'. FOR TOP PLANING AND 'E' TO 'F' FOR SIDE PLANING. THE SECOND PLANING BEGINS AT 'E' AND ENDS AT 'H'. THE TOP OF HEAD IS PLANED DOWN FURTHER BY 21.5 mm AT 'E' AND THE SIDE OF HEAD IS SET BACK FURTHER (SEE TEMPLATE 'Y'). TEMPLATE 'Y' IS DRAWN ON THE END OF THE RAIL AND PLANING GOES STRAIGHT FROM 'E' TO 'H'.

2.2.3. INSIDE FOOT:

THE PLANING IS IN TWO STAGES . FOR THE FIRST STAGE PLANING, THE RAIL IS SPRUNG TO A RADIUS OF 784993 mm (CONCAVE OUTSIDE) AND SECURELY CLAMPED IN THIS POSITION. THE INNER EDGE OF THE FOOT OF TONGUE RAIL IS CUT BACK TO CLEAR THE WEB OF THE STOCK RAIL. THIS PLANING STARTS AT 31 mm FROM THE CENTRE LINE OF HEAD OF TONGUE RAIL AT 'E' (VIDE TEMPLATE 'Z') AND GOES STRAIGHT FROM 'E' TO 'N'.
FOR THE SECOND STAGE (i.e. RELIEF) PLANING, THE RAIL IS KEPT STRAIGHT AND 48 mm WIDE PORTION OF OUTSIDE FOOT (i.e. ON GAUGE SIDE) AND 17 mm WIDE PORTION OF INSIDE FOOT (i.e. ON NON-GAUGE SIDE) CUT AWAY AS SHOWN IN DETAIL AT 'P' ALONG SIDE.

2.2.4. INSIDE HEAD:

BEFORE PLANING,THE RAIL IS SPRUNG TO RADIUS OF 784993 mm (CONCAVE OUTSIDE) AND SECURELY CLAMPED IN THIS POSITION. IN THIS PLANING, THE SIDE OF THE HEAD IS GIVEN AN OUTWARD BATTER OF 1 IN 4. THE PLANING BEGINS AT 'E' AND GOES STRAIGHT THROUGH TO 'F' TO FIT THE CUT-HEAD OF STOCK RAIL.


4. THE CURVED TONGUE AND STOCK RAILS SHALL BE GIVEN THE CORRECT BEND AS SHOWN IN DRG. No. RDSO/T- 7075 BY THE MANUFACTURER BEFORE DESPATCH FROM HIS WORKS. WHILE INDENTING FOR THE TURNOUTS, THE RAILWAYS SHALL CLEARLY INDICATE THE NUMBER OF L.H. & R.H. TURNOUTS REQUIRED BY THEM, AS THE CURVATURE OF TONGUE & STOCK RAILS GIVEN BY THE MANUFACTURER IS LIKELY TO GET DISTURBED DURING TRANSIT TO THE SITE, THE SAME SHALL BE CHECKED AND RECTIFIED BY THE S.S.E. (P. WAY) WHILE LAYING IN THE TRACK.


3. ALL HOLES ARE 28 mm DIA. EXCEPT WHERE OTHERWISE SHOWN.


2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.

1. ALL DIMENSIONS ARE IN MILLIMETRES.


NOTE









SECTION AT - L



DETAIL AT Ⓟ




SECTION AT HEEL



ELEVATION OF R.H. STOCK RAIL (RUNNING EDGE STRAIGHT)



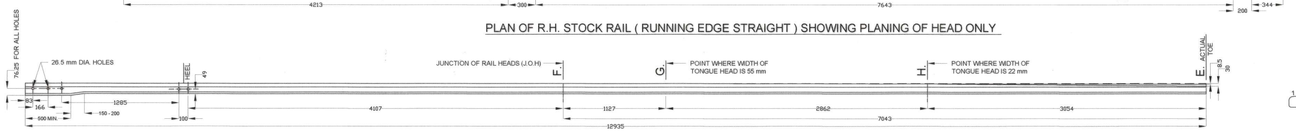

PLAN OF R.H. STOCK RAIL (RUNNING EDGE STRAIGHT) SHOWING PLANING OF HEAD ONLY




SECTION AT- 'C'


SHOWING PLANING OF
HEAD OF STOCK RAIL



ELEVATION OF R.H. TONGUE RAIL (RUNNING EDGE CURVED)




PLAN OF R.H. TONGUE RAIL (RUNNING EDGE CURVED) SHOWING PLANING OF FOOT ONLY




SECTION AT - 'F'

SHOWING DETAILS AT
JUNCTION OF RAIL HEADS




SECTION AT - 'G'

SHOWING POINT OF COMMENCEMENT
OF TOP HEAD PLANING OF TONGUE RAIL




SECTION AT - 'H'

22 mm HEAD THICKNESS




TEMPLATE- Z

SHOWING FINAL SECTION OF
TONGUE RAIL AT ACTUAL TOE



TEMPLATE- Y

SHOWING SECTION OF TONGUE RAIL
AT 'E' AFTER 2nd PLANING



TEMPLATE- X

SHOWING SECTION OF TONGUE RAIL
AT 'E' AFTER 1st PLANING

ONE SET RIGHT	11200 mm CURVED SWITCH FOR 1 IN 16 LEFT TURNOUT WITH ZU-1-60 THICK WEB TONGUE RAILS B.G. (1673 mm) FOR 60 Kg (UIC) ON PSC SLEEPERS.	RDSO/T-7076
ONE SET LEFT	11200 mm CURVED SWITCH FOR 1 IN 16 LEFT TURNOUT WITH ZU-1-60 THICK WEB TONGUE RAILS B.G. (1673 mm) FOR 60 Kg (UIC) ON PSC SLEEPERS.	RDSO/T-7076
No. OFF	DESCRIPTION FOR DRAWING	No.

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW-226011, INDIA
AND SHALL NOT BE USED, COPIED OR REPRODUCED IN
PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

DETAIL OF ZU-1-60 THICK - WEB TONGUE RAILS & 60 Kg (UIC) STOCK RAILS FOR 11200 mm CURVED SWITCH B.G. (1673 mm) ON PSC SLEEPERS.

STAND. ADVANCE 29-01-2010 (T)
CANCLD.
REVD.

SPECIFICATION	SCALE	ALT:	DESCRIPTION	DATE	RDSO/T- 7076/1
IRS. T 10.	NOT TO SCALE	01.	REVISED & REDRAWN	23-09-2021	

FILE S.No.	C/T/PTX/TWS/DESIGN S.No. (File S. No. 877 TO ------)	C.R.No. PAGES	DRG. BY:	DRG. CH:	DST - III	APPD:	DD/TP & C
		NIL	M.K. MANDAL (SSE/T)	RAM MOHAN (SSE/T)	RITU RAJ		R.P.VERMA (SSE/T) A.K. SHARMA