




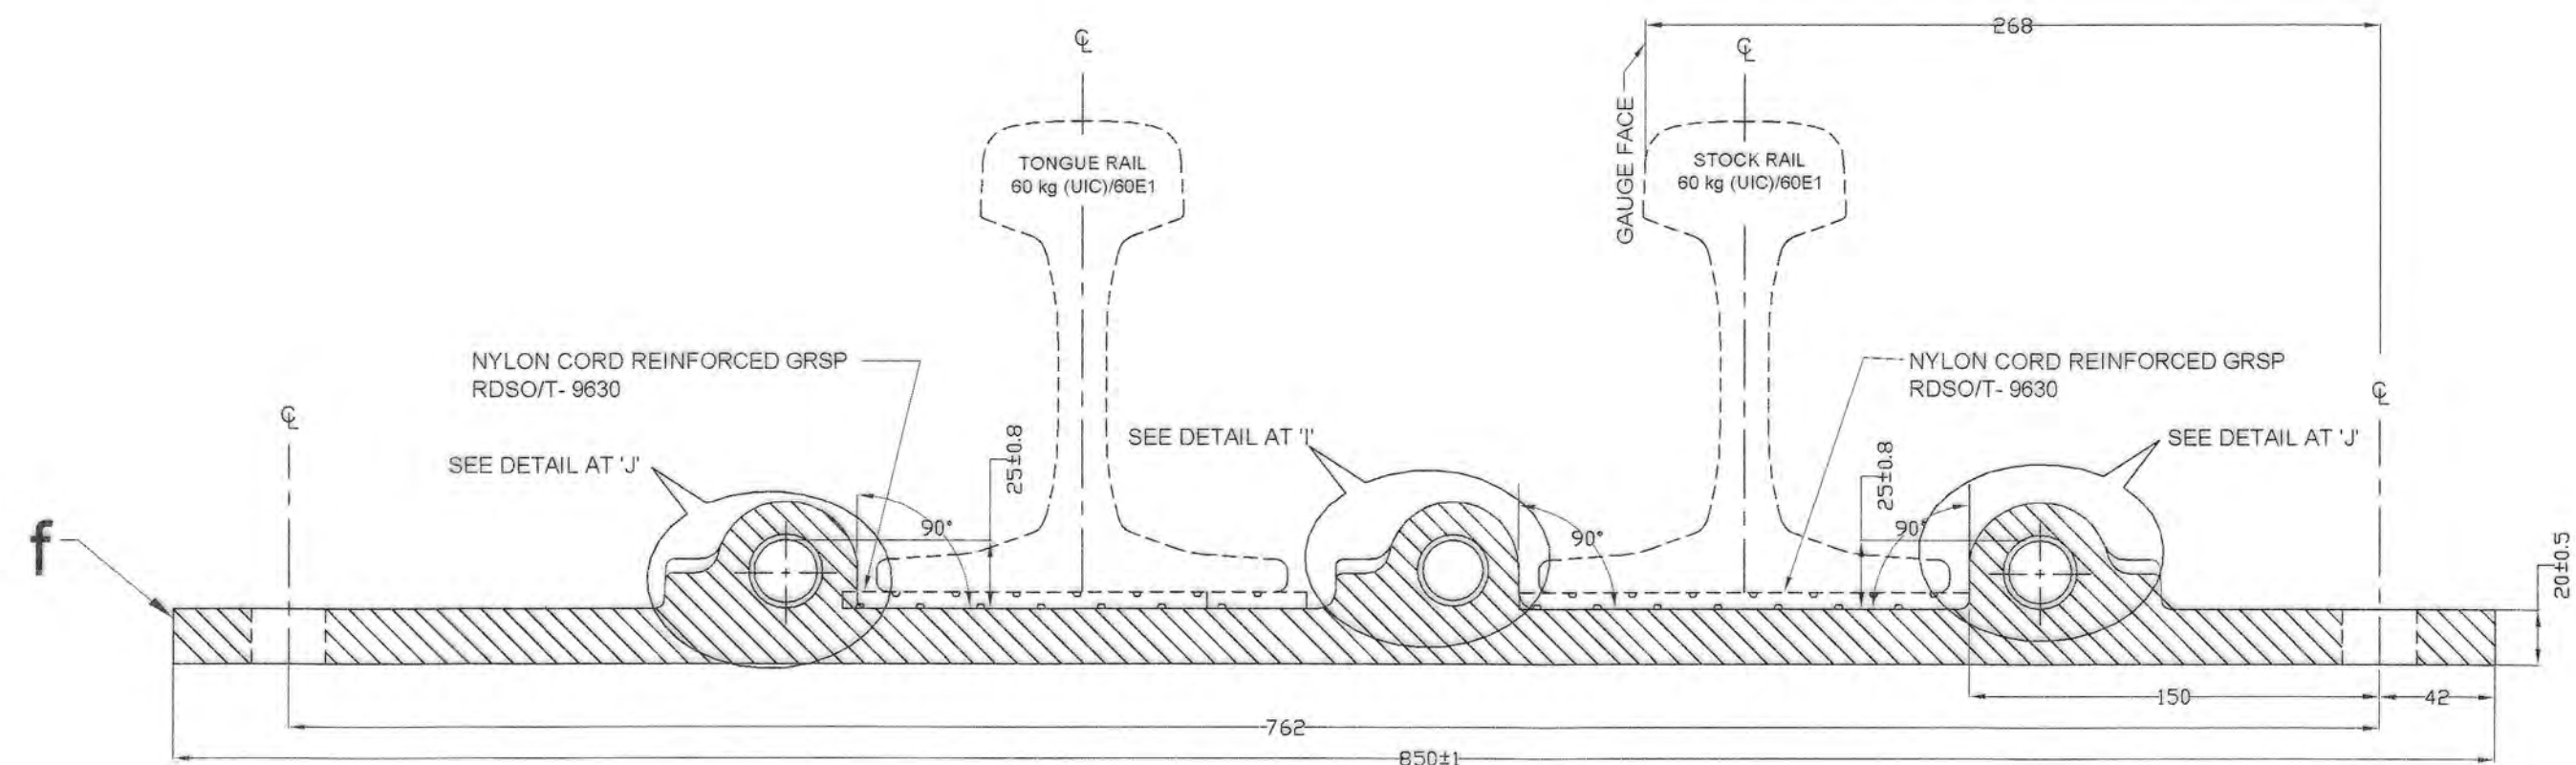

SECTIONAL ELEVATION ON GH

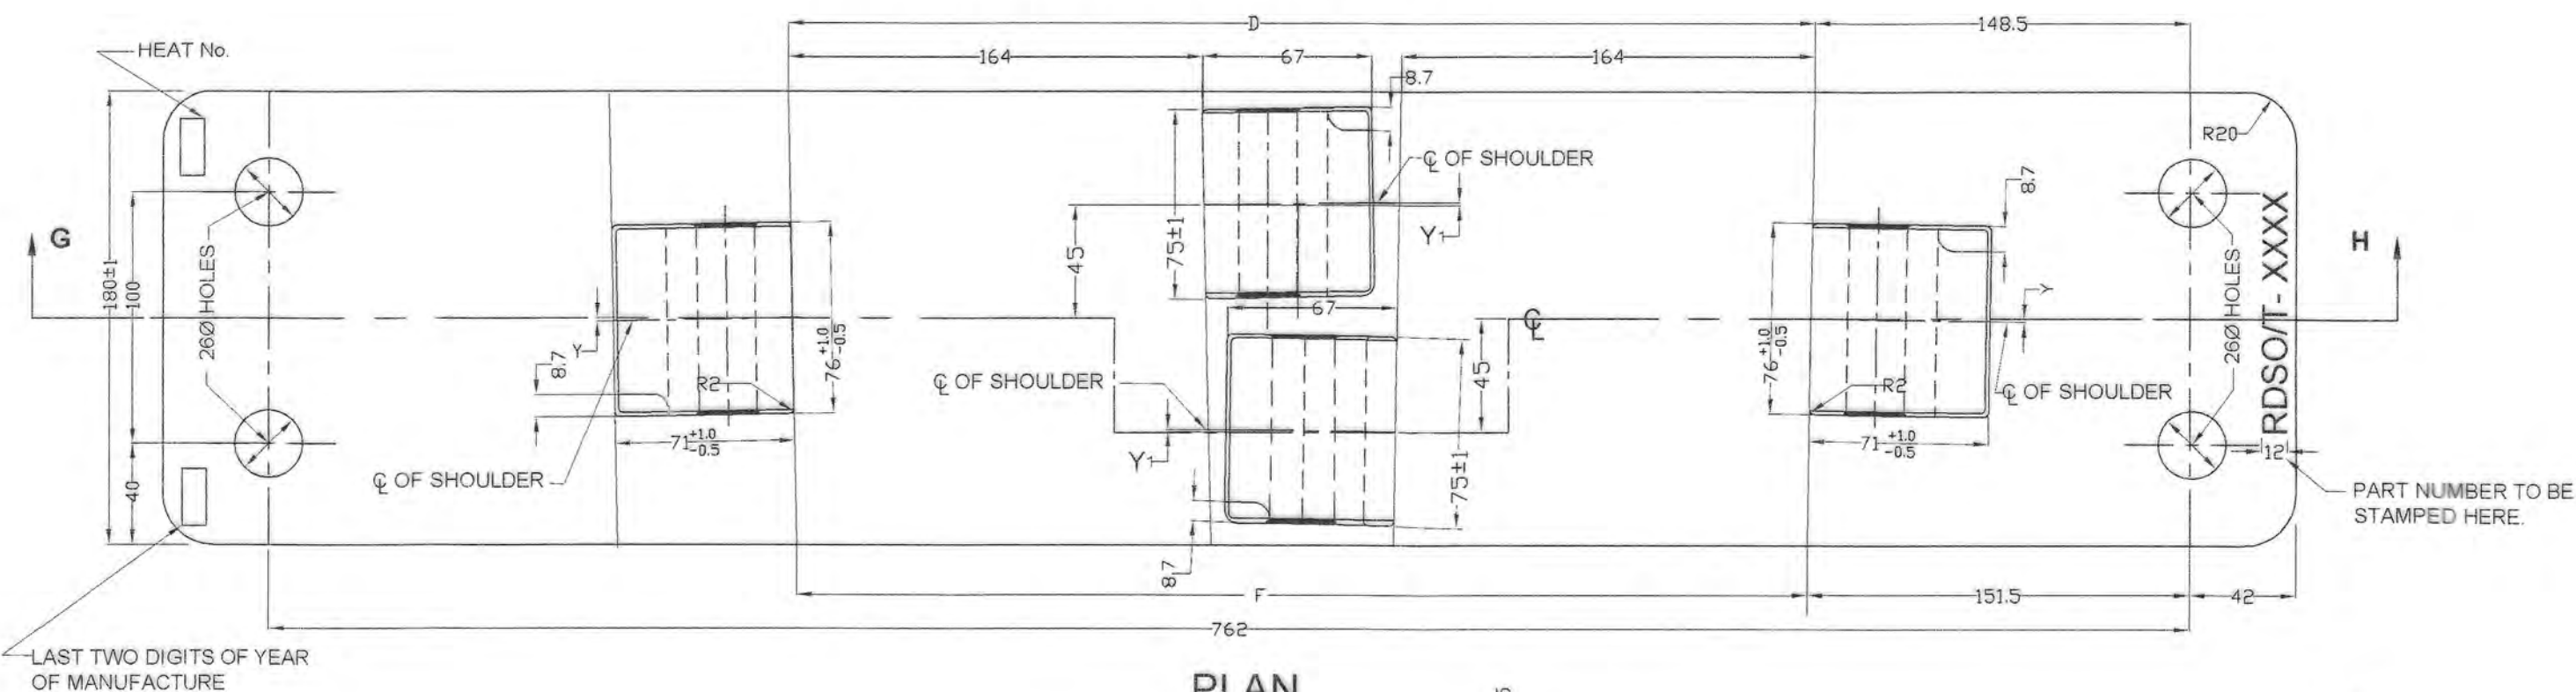

PLAN

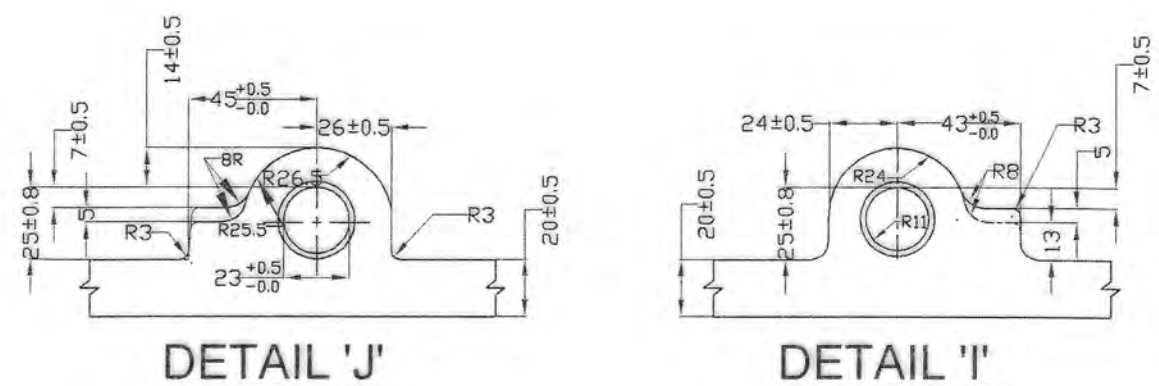

DETAIL 'J'

DETAIL 'I'

8. MACHINED SURFACE SHOWN THUS ----- f.
7. THE SPECIAL FLAT BEARING PLATE SHALL BE FIXED BY MEANS OF FOUR PLATE SCREWS TO DRG. No. RDSO/T- 3913 THROUGH THE ROUND HOLES & SINGLE COIL SPRING WASHER TO DRG. No. T 10773.
6. ALL MARKING SHALL BE IN 12 MM SIZE IN RAISED LETTERS.
5. ALL THE SHARP EDGES ARE TO BE MADE BLUNT WITH 3R PREFERABLY, EXCEPT WHERE OTHERWISE SHOWN.
4. DIMENSION GIVEN SHOW WHERE THE CENTRE AND CROSS-LINES MEET THE EDGES OF THE BEARING PLATE.
3. A TOLERANCE OF 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF HOLES.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTE

IS 1030:1998 (Reaffirmed 2022)
GRADE: 280-520 W

NOT TO SCALE

ALT:

DESCRIPTION

TABLE OF DIMENSIONS

SLEEPER NO.	PART NO.	DIMENSIONS (mm)			
		D	F	Y	Y ₁
25	RDSO/T- 9621	407	401	1.84	1.12
26	RDSO/T- 9622	425.5	419.5	1.91	1.16
27	RDSO/T- 9623	445	438.5	1.98	1.21

ONE EACH	10125 mm CURVED SWITCH WITH ZU-1-60/ 60E1A1 THICK - WEB TONGUE RAIL FOR 1 IN 12 TURNOUT B.G. (1673 mm) FOR 60 kg (UIC)/ 60E1 ON PSC LEEPERS	RDSO/T/ 6155
No. OFF	DESCRIPTION	No.
FOR DRAWING		
THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW-226011, INDIA AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE, WITHOUT PRIOR CONSENT IN WRITING		
R.	D.	S. O.
CAST STEEL SPECIAL FLAT BEARING PLATES FOR 10125 mm CURVED SWITCH WITH ZU-1-60/ 60E1A1 THICK-WEB TONGUE RAILS B.G. (1673 mm) FOR 60 kg (UIC)/ 60E1 ON P.S.C. SLEEPERS.		
STAND----- CANCELLED----- REV-----	ADVANCE 12-10-2023	(T)
RDSO/T- 9621 TO RDSO/T- 9623		