
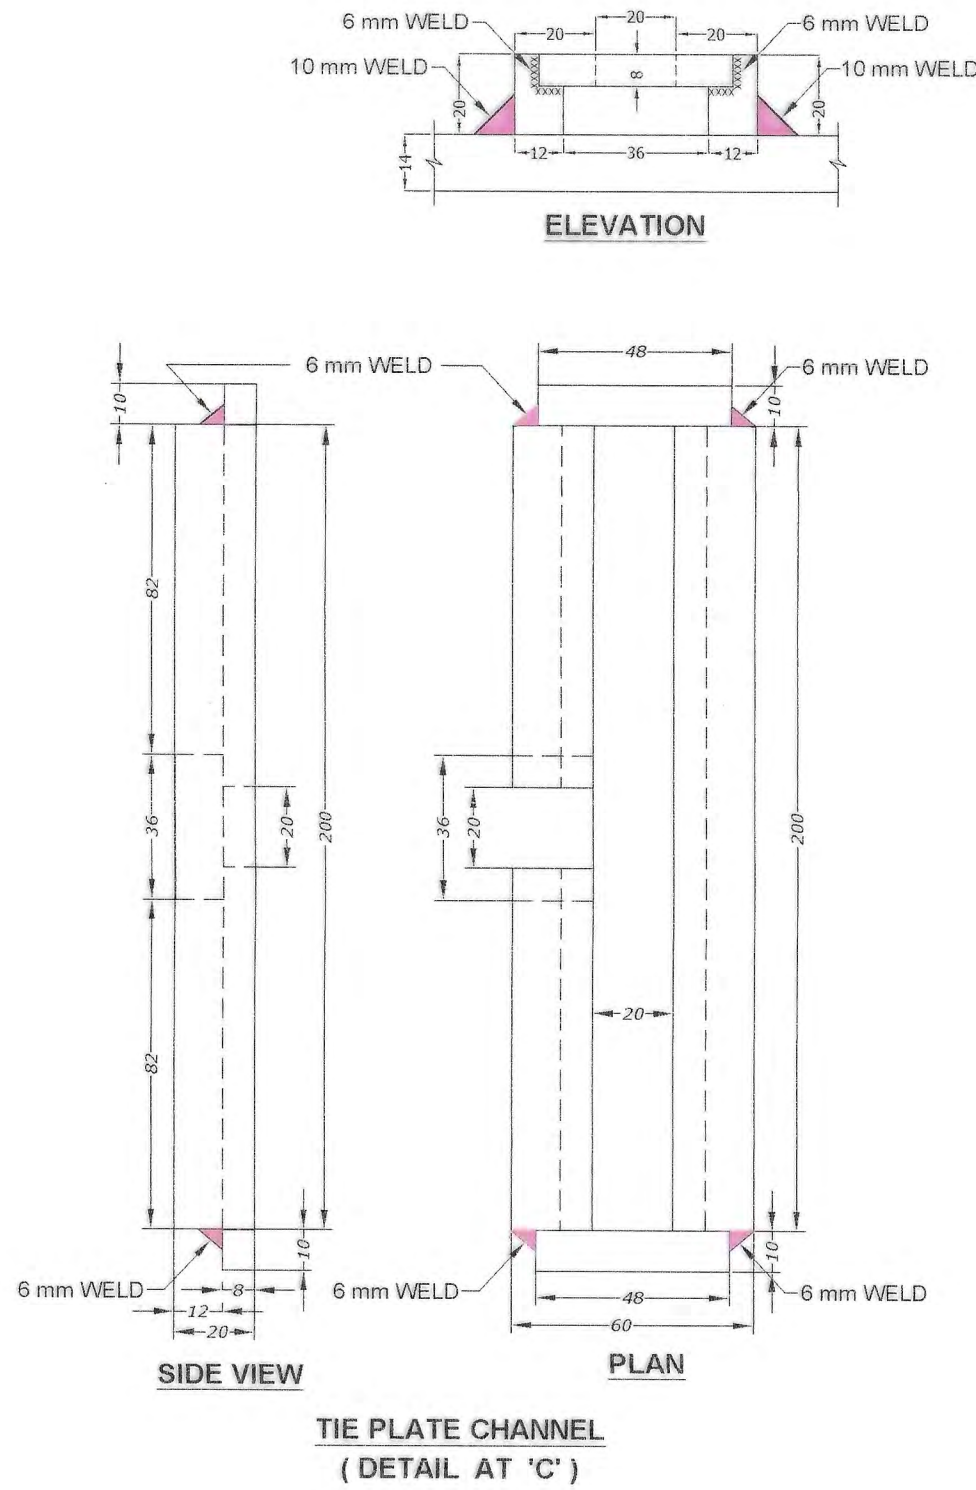
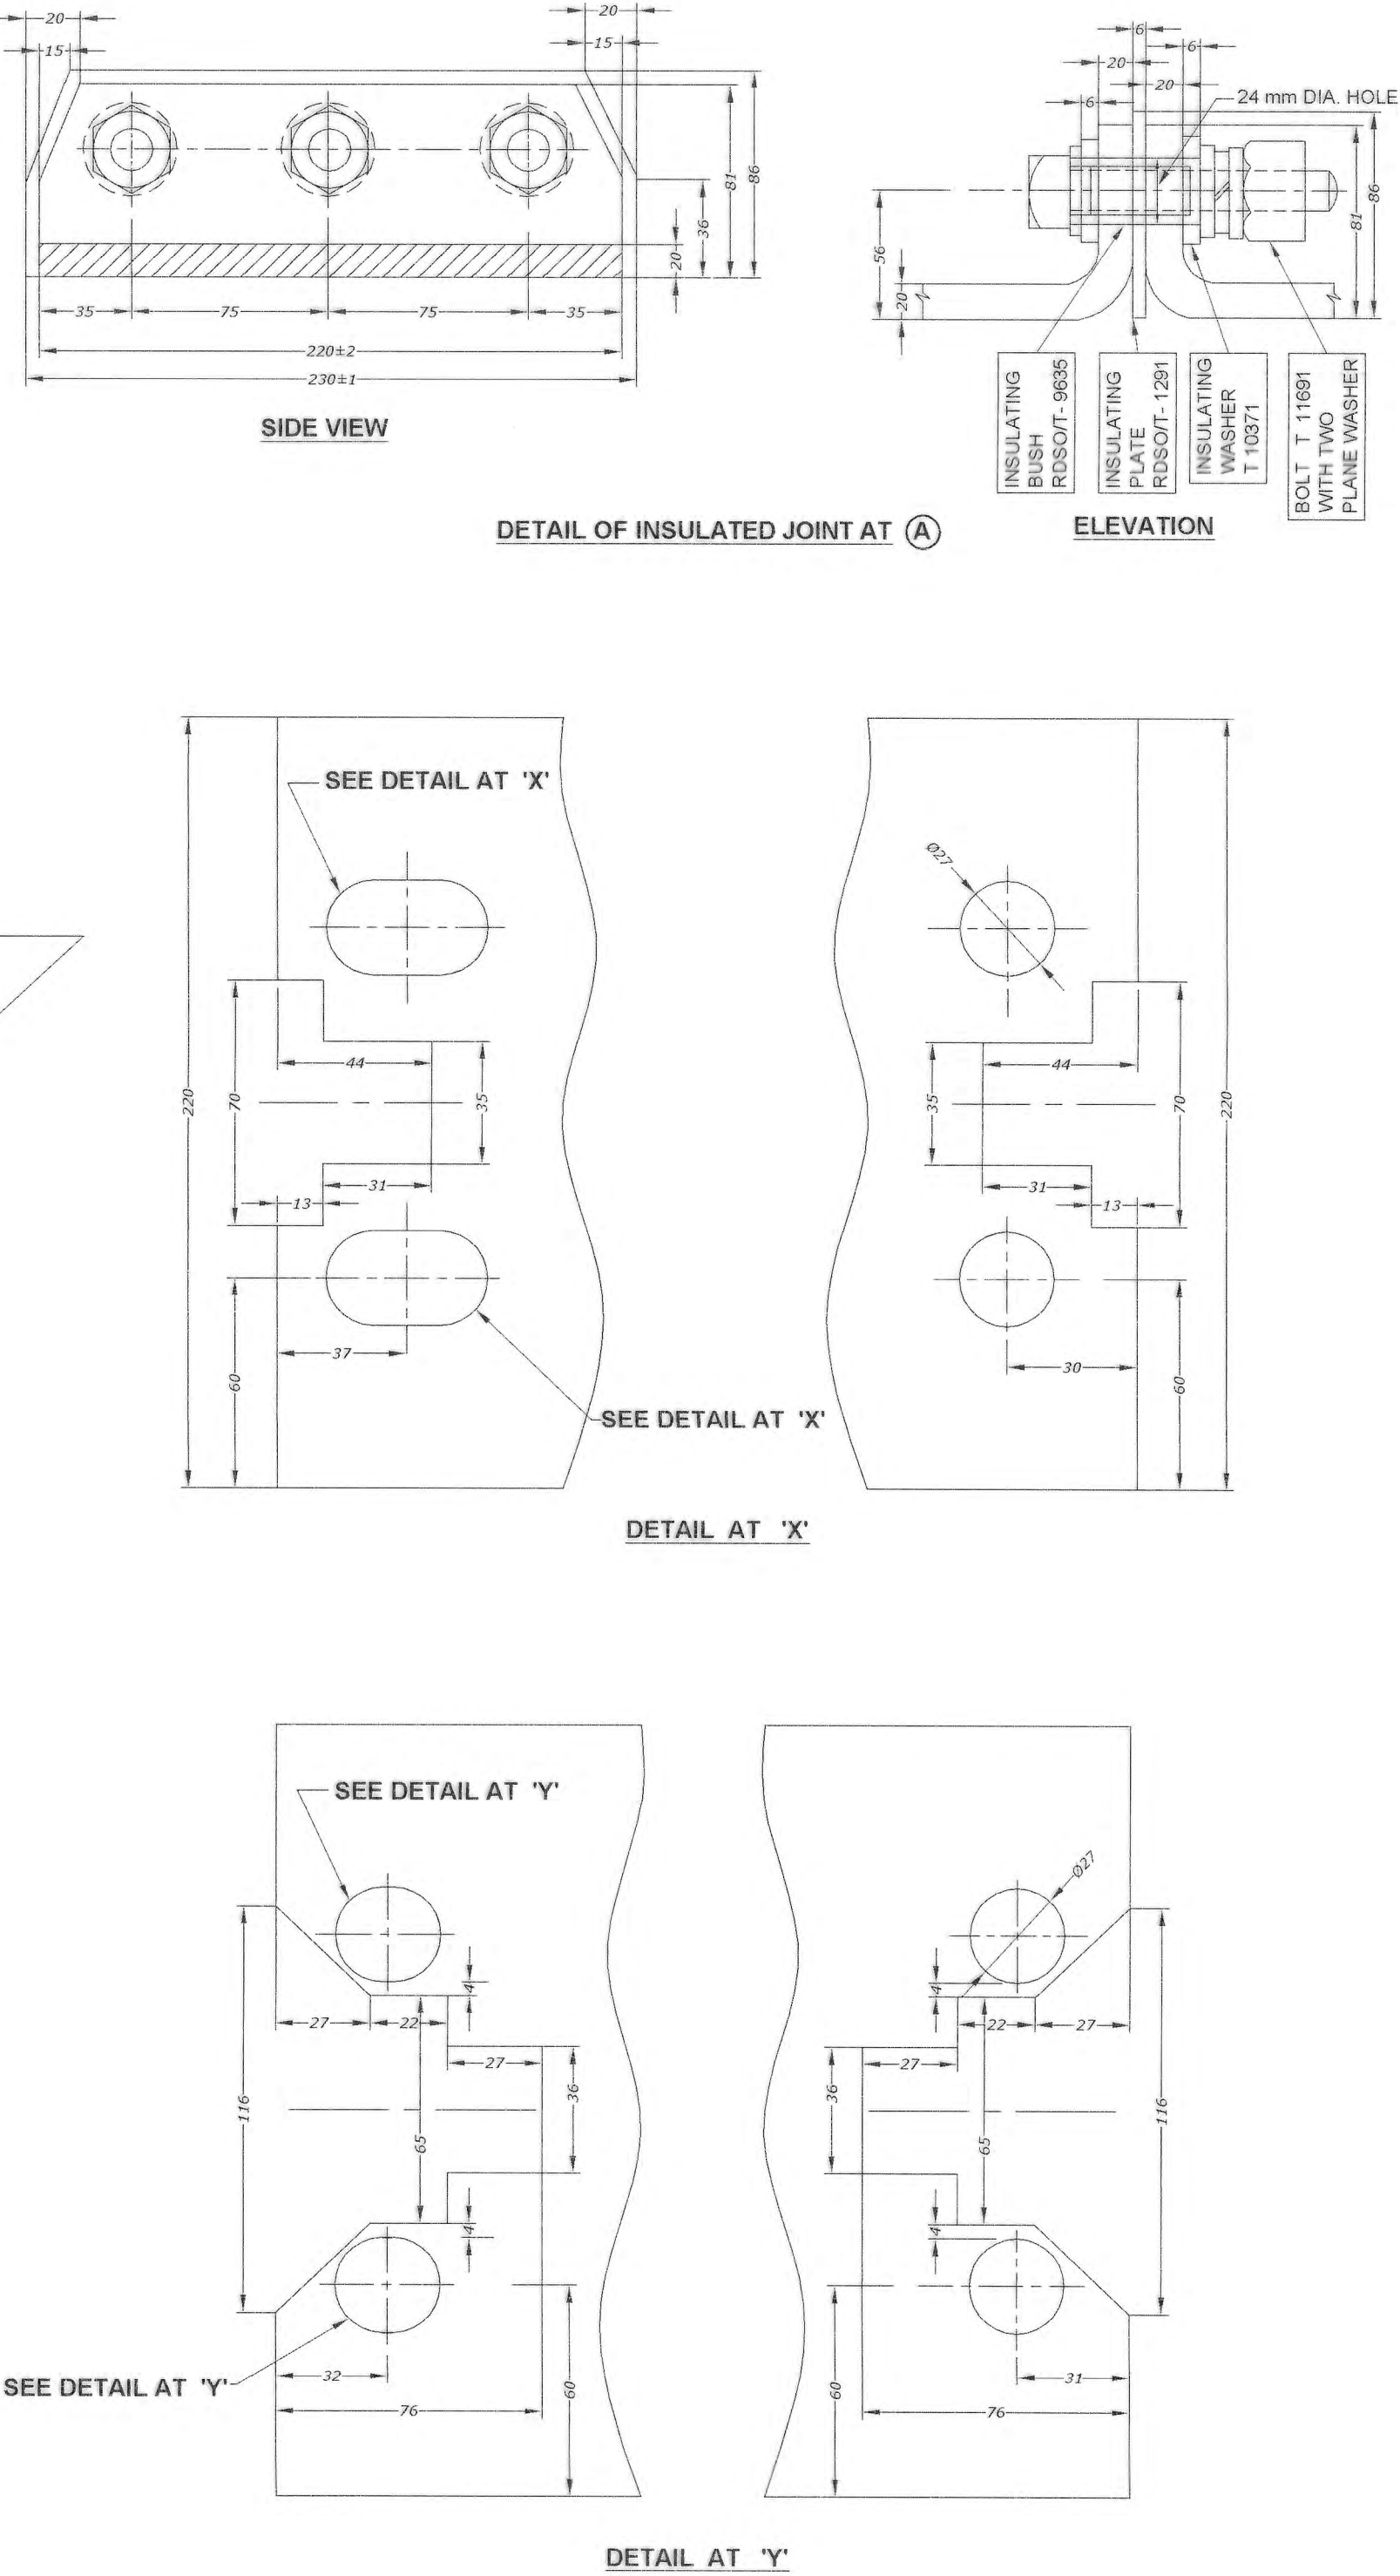


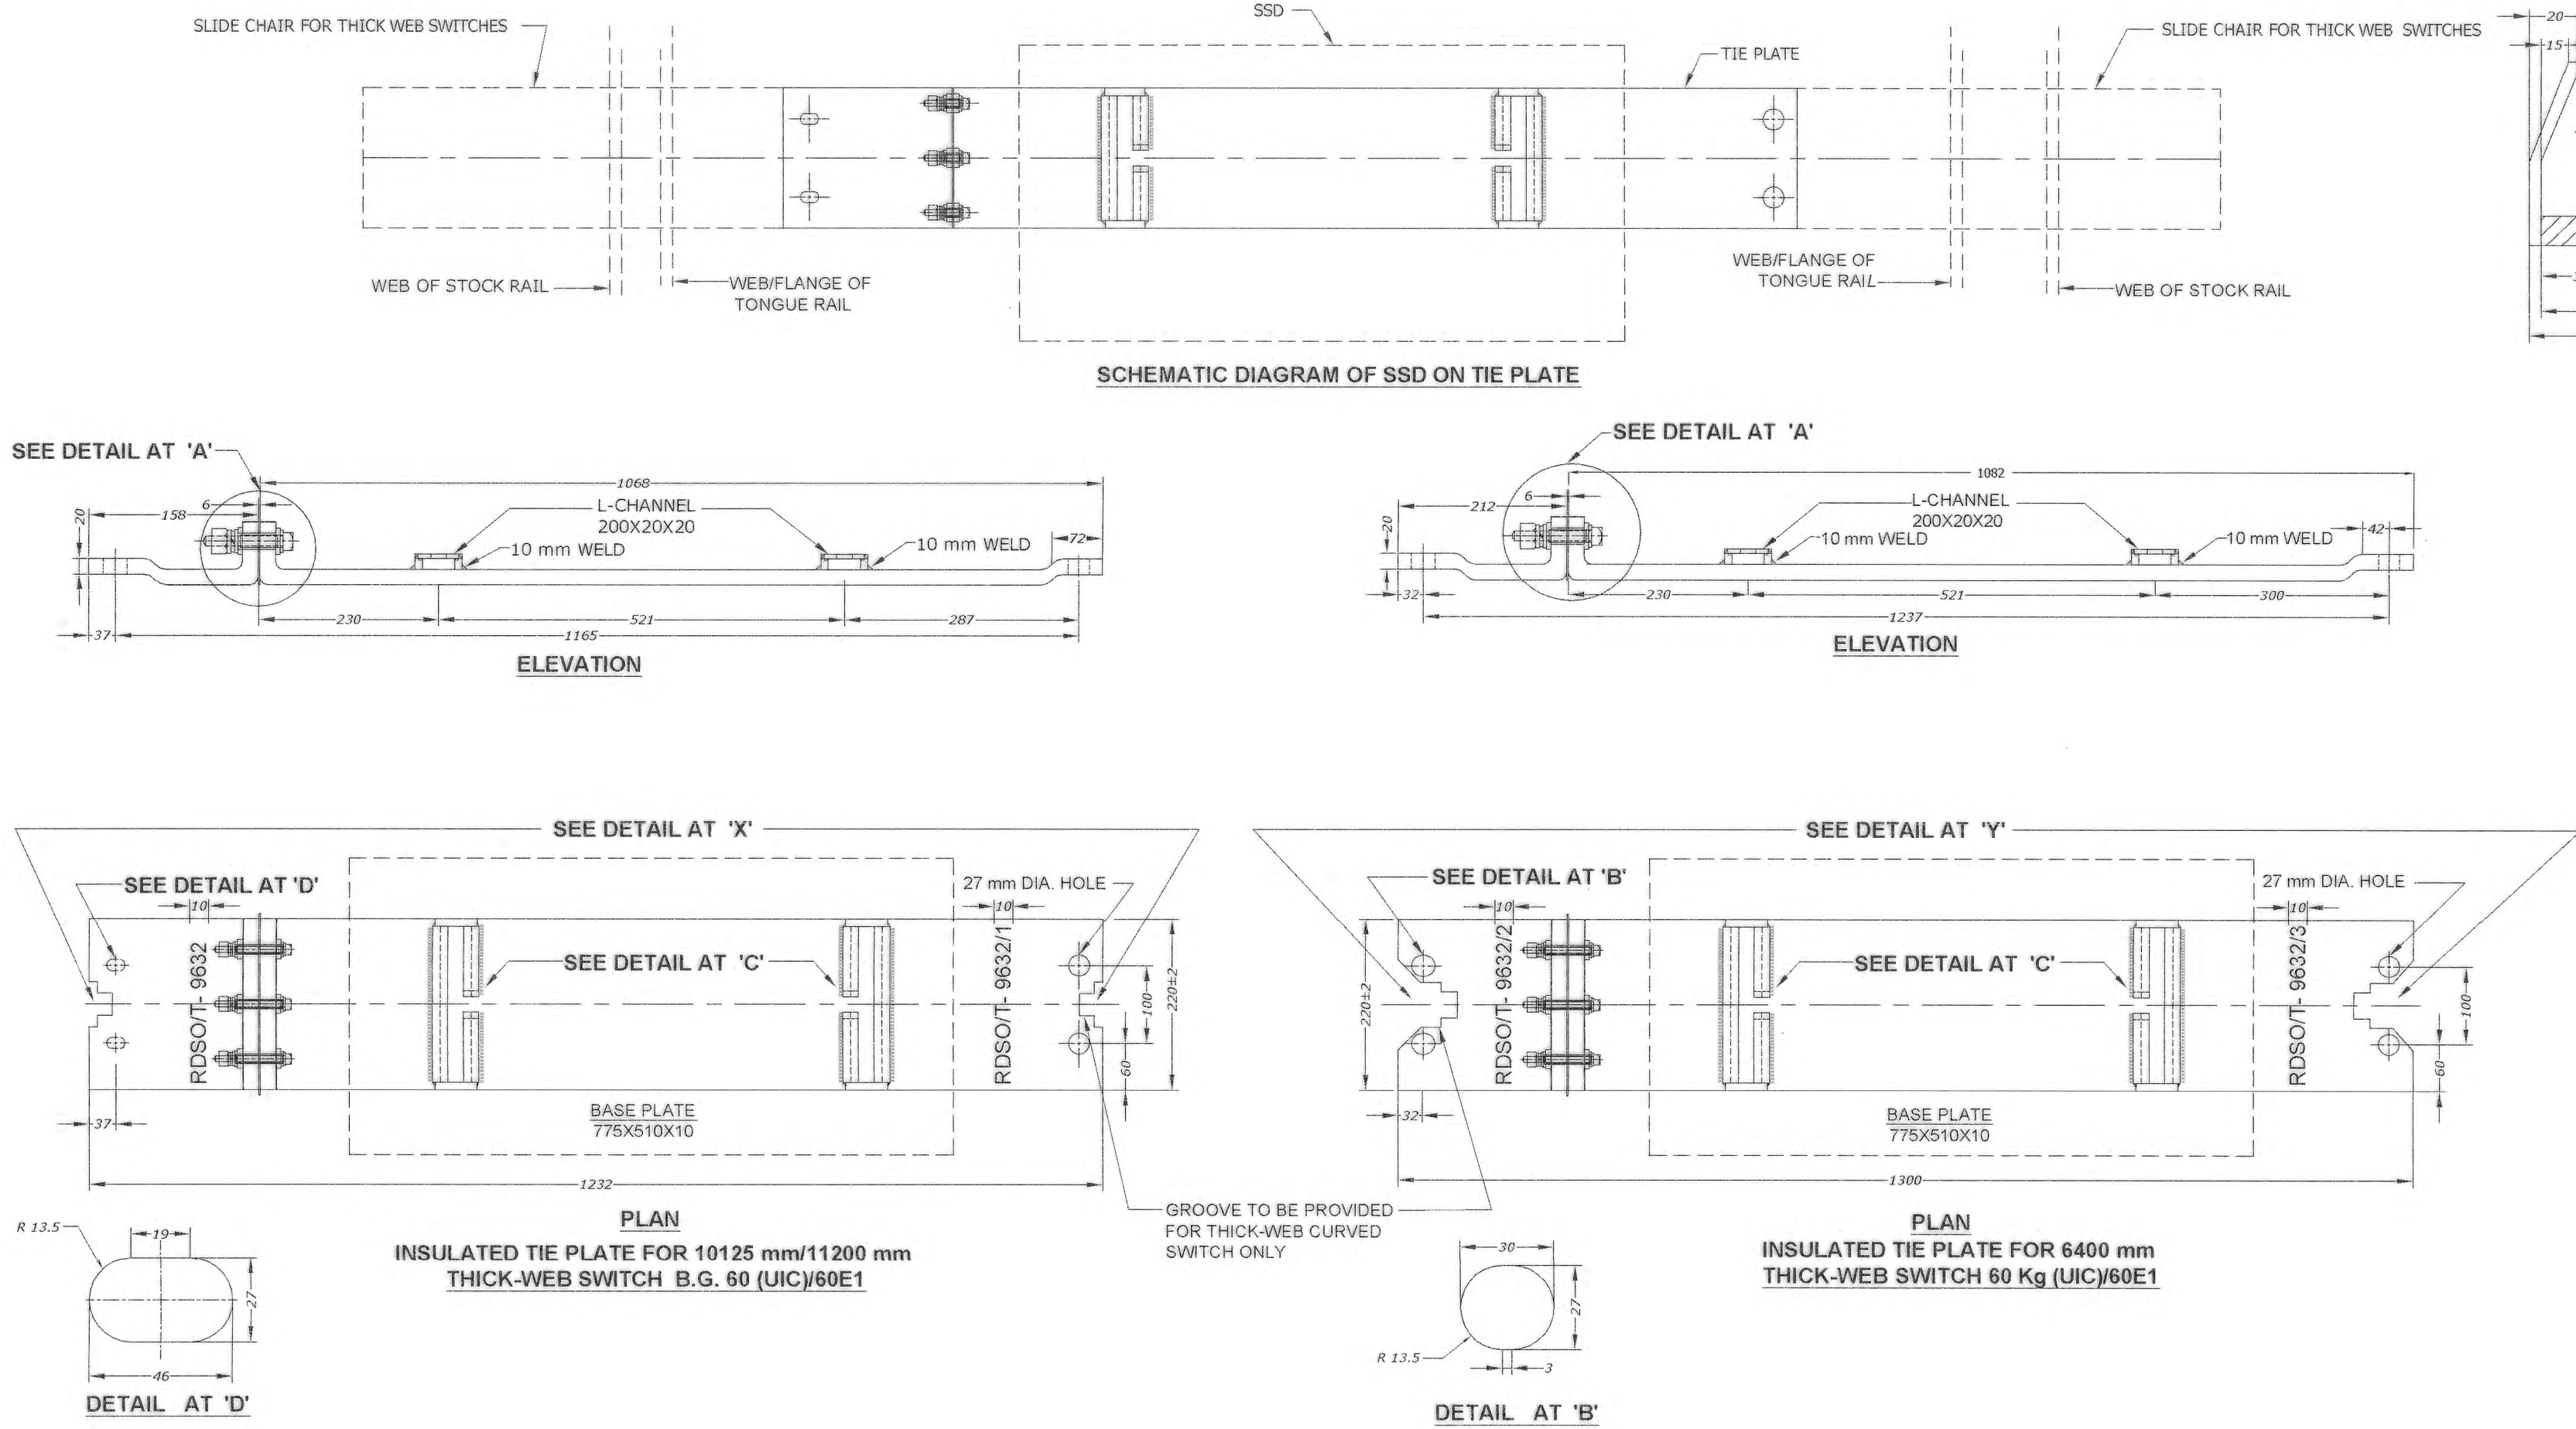

- NOTE
9. PART NUMBER TO BE STAMPED AS INDICATED.
 8. FOR COMPONENTS OF SSD REFER DRG. No. RDSO/T- 6217 TO 6217/39.
 7. FOR SSD REFER DRG. No. RDSO/T- 6216 (THICK WEB SWITCH).
 6. MIG PROCESS OF WELDING TO BE ADOPTED.
 5. THE TIE PLATE SHALL BE HELD DOWN ON CONCRETE SLEEPER BY MEANS OF 24 mm DIA. PLATE SCREW TO DRG. No. RDSO/T-3913 & SINGLE COIL SPRING WASHER TO DRG. No. T 10773.
 4. A TOLERANCE OF 0.8 mm EACH WAY IS PERMITTED IN THE POSITION OF THE HOLES.
 3. ALL HOLES ARE 27 mm DIA. EXCEPT WHERE OTHERWISE SHOWN.
 2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
 1. ALL DIMENSIONS ARE IN MILLIMETRES.

5. IS: 10742 - 1983 (GRADE - II)
FOR GUN METAL RODS & BARS
4. IRS SPEC. FOR SSD
(PROV. 2008)
3. IS: 2062 (GRADE - B)
2. IS: 3195 - 1992.
GRADE: 55 Si 7 (SPRING)
1. IRS: T - 10

NOT TO SCALE

ONE SET	SPRING SETTING DEVICE (SSD) FOR USE WITH Zu-1-60/60E1A1 THICK-WEB SWITCHES B.G. (1673 mm) FOR 60 kg (UIC)/60E1 ON PSC SLEEPERS	RDSO/T- 6216
No. OFF	DESCRIPTION FOR DRAWING	No.
THIS DRAWING IS THE PROPERTY OF RESEARCH DESIGNS AND STANDARDS ORGANISATION (MINISTRY OF RAILWAYS) LUCKNOW - 226011, INDIA. AND SHALL NOT BE USED, COPIED OR REPRODUCED IN PART OR WHOLE WITHOUT PRIOR CONSENT IN WRITING.		
R. D. S. O		
TIE PLATE FOR S.S.D FOR USE WITH Zu-1-60/60E1A1 THICK - WEB SWITCHES B.G. (1673 mm) 60 Kg (UIC)/60E1 ON PSC SLEEPERS.		
STAND: ADVANCE	12-10-2023	(T)
CANCEL: REV: 1		
SPECIFICATION	SCALE	ALT: DESCRIPTION DATE

RDSO/T- 9632 TO RDSO/T- 9632/3