
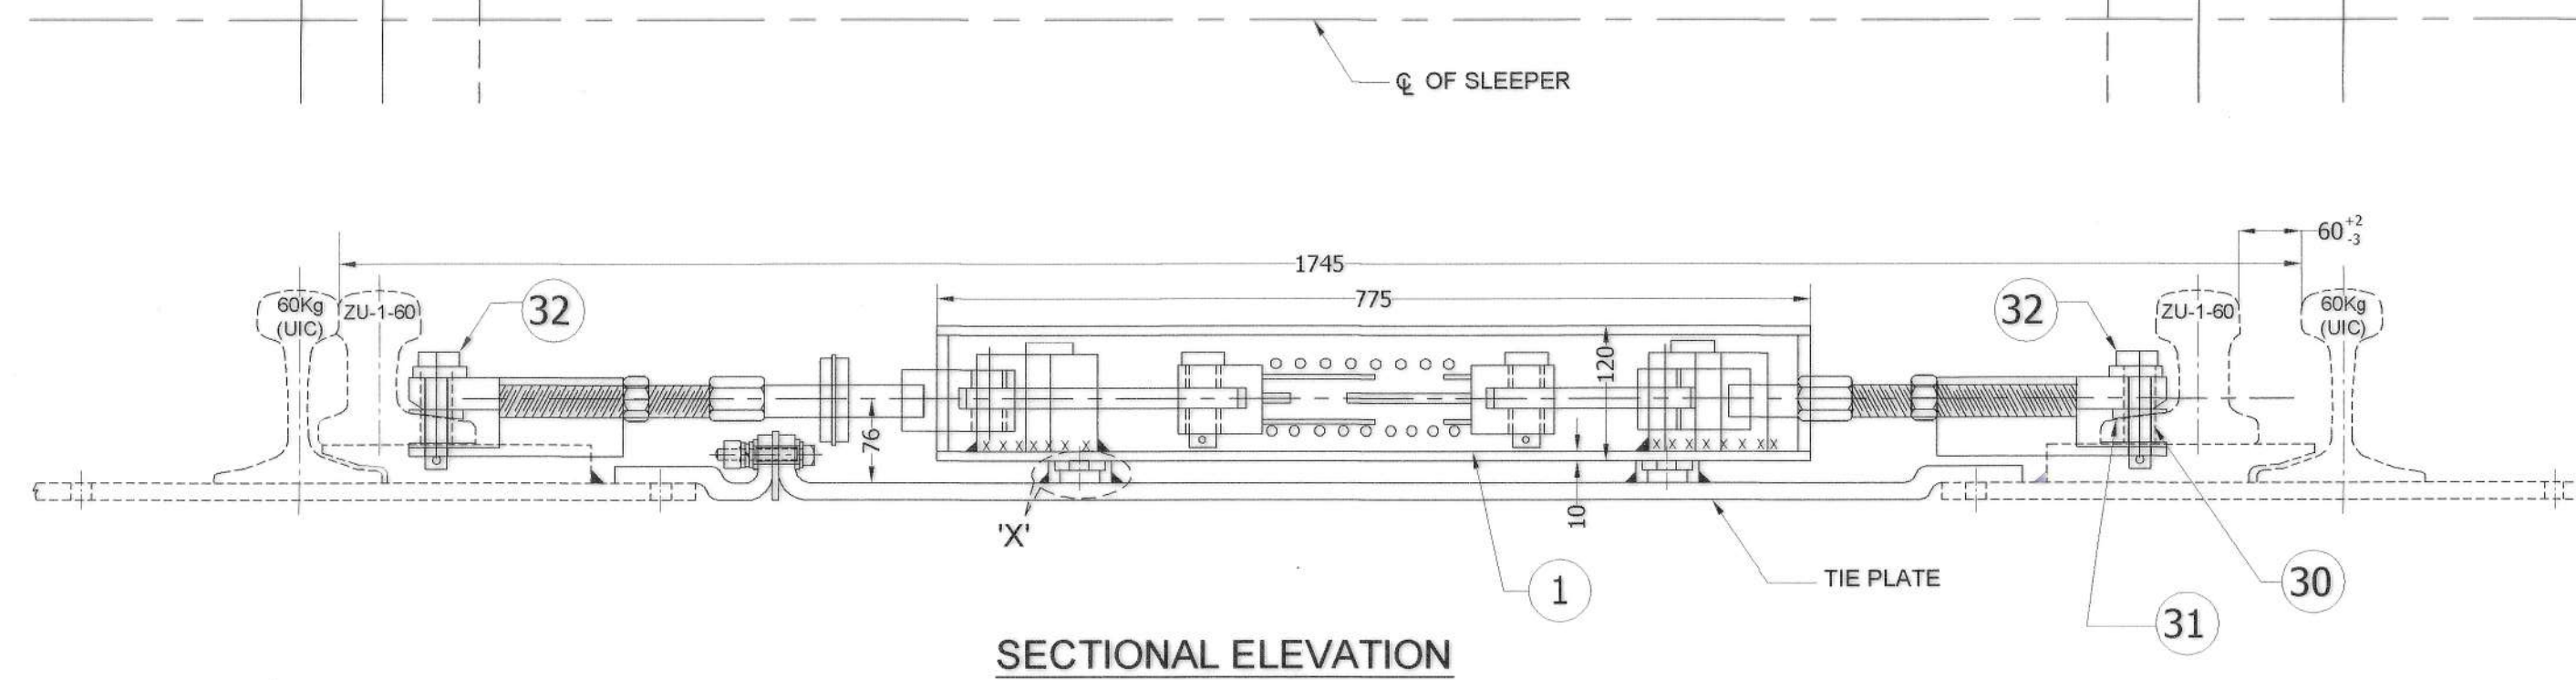
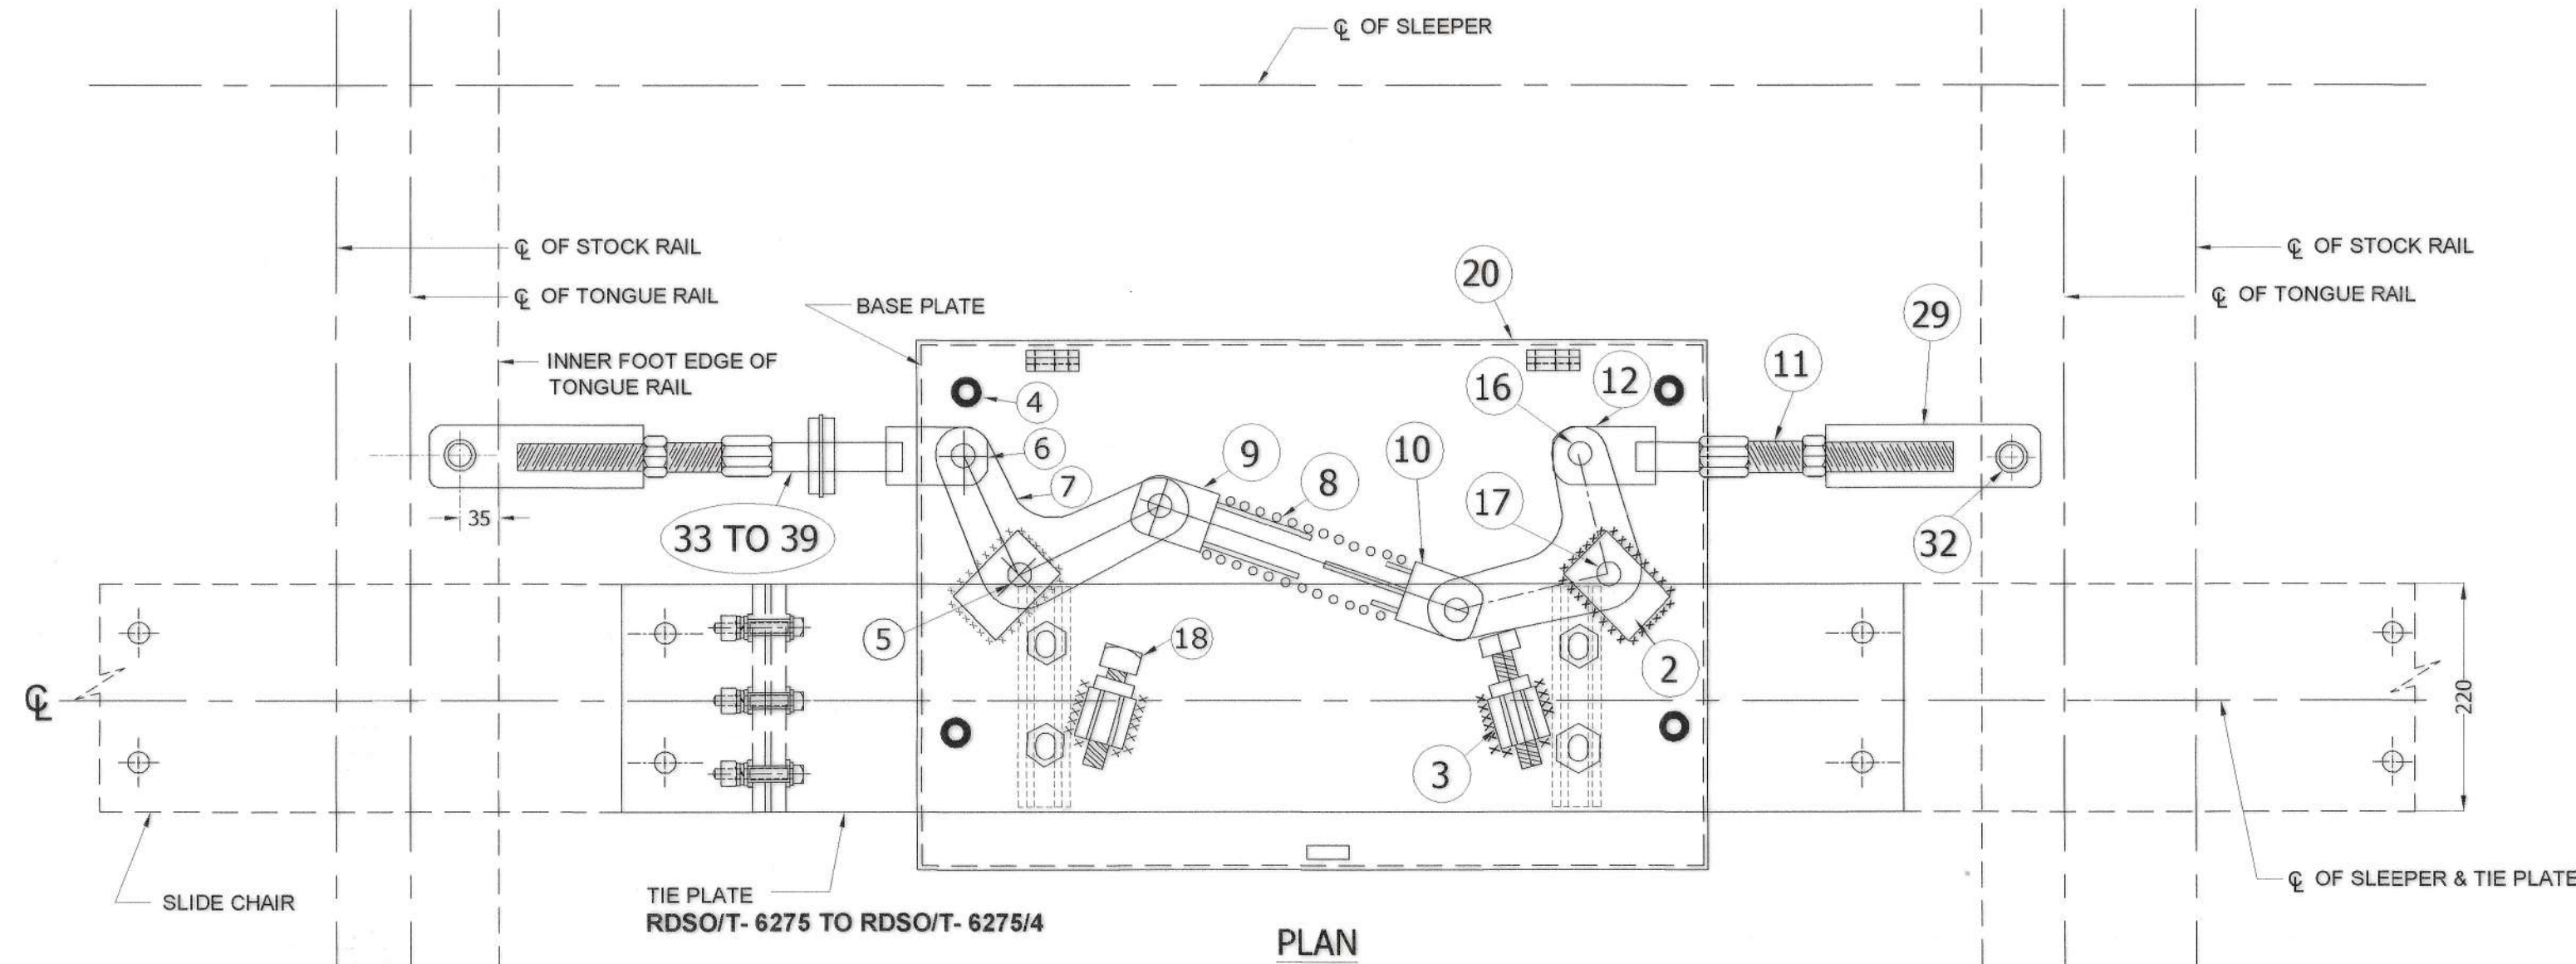


FILE n.p. No.	CT/PTX/INT/SSD n.p. No. 31 (S. No. 551 TO)	C.R. No. PAGES	CAL. BY:	DRG. BY:	SD R.L. WAGHMARE (SSE/7)	CH. BY:	SD R.L. WAGHMARE (SSE/7)	SD RAM MOHAN (SSE/7)	SD ANAND KUMAR (SSE/7)	DD/TP&C-II A. K. SHARMA	DD/TP&C-I M. K. JAISWAL	JDST - III	SD RITU RAJ
FILE n.p. No.	CT/PTX/TWS/TOIRV n.p. No. 17 (S. No. 877 TO)	C.R. No. PAGES	CAL. BY:	DRG. BY:	SD RAM MOHAN (SSE/7)	CH. BY:	SD RAM MOHAN (SSE/7)	SD RAM MOHAN (SSE/7)	SD ANAND KUMAR (SSE/7)	DD/TP&C-II A. K. SHARMA	DD/TP&C-I M. K. JAISWAL	JDST - III	SD RITU RAJ

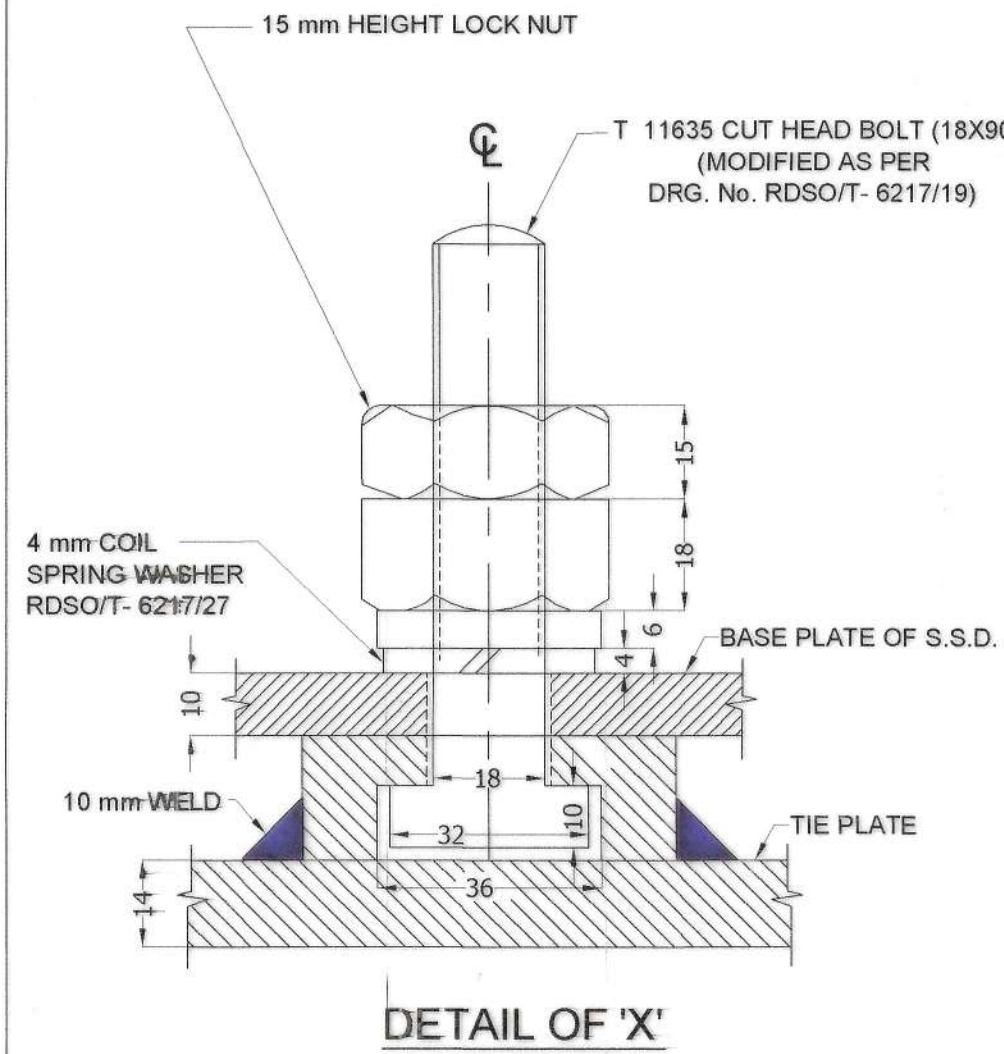

ALT: 5

7. CONNECTING ROD INSULATED (33 TO 39) & CONNECTING ROD (11) SHALL BE INTERCHANGED FOR SSD TO BE USED WITH 1 IN 8.5 AND 1 IN 16, ZU-1-60 THICK-WEB SWITCHES.
6. FOR DETAILS OF COMPONENTS AND TIE PLATE REFER DRG. No. RDSO/T- 6217 TO RDSO/T- 6217/39 & RDSO/T- 6275 TO RDSO/T- 6275/4 RESPECTIVELY.
5. 5 mm THICK CHEQUERED PLATE SHALL BE USED FOR MAKING COVER OF S.S.D.
4. S.S.D. TO BE FITTED WITH FOOT OF TONGUE RAIL HAVING 28 DIA. HOLE. THIS HOLE MAY ALSO BE USED FOR FIXING STRETCHER BAR WHEN THE S.S.D. IS NOT INSTALLED HERE.
3. ONE No. 10 mm DIA. COIL SPRING IS TO BE USED TO SPECIFICATION IS: 3195 - 1992 GRADE: 55 S.i. - 7.
2. LATEST ALTERATION NUMBER SHALL BE CHECKED BEFORE PLACING ORDER.
1. ALL DIMENSIONS ARE IN MILLIMETRES.

NOTE

IS: 10742 - 1983 (GRADE - II) FOR GUN METAL RODS & BARS
IRS SPEC. FOR SSD (PROV. 2008)
IS: 2062 (GRADE-B)
IS: 3195 - 1992
GRADE: 55 SI - 7 (SPRING)

NOT TO SCALE

SPECIFICATION

SCALE

05	REVISED & REDRAWN ii) LOCATION OF TONGUE MOUTH FOR 1 IN 8.5 IS MODIFIED & 1 IN 8.5 ADDED IN NOTE No. 7 i) DISTANCE OF HOLE FOR FIXING TONGUE MOUTH FROM ϵ OF SLEEPER ON WHICH SSD IS FIXED FOR 1 IN 16 IS MODIFIED	23-09-2021
04	REVISED & REDRAWN	04-10-2019
ALT:	DESCRIPTION	DATE

TABLE OF COMPONENTS

PART No. (REFER DRG. No. RDSO/T- 6217 TO RDSO/T- 6217/39 FOR DETAILS)	COMPONENTS	QUANTITY
01	BASE PLATE	1
02	LEVER HOLDER BLOCK	2
03	STOPPER BLOCK	2
04	COVER STOPPER WITH BOLT	4
05	LEVER ARM BUSH (CENTRAL) GUN METAL	2
06	LEVER ARM BUSH (END) GUN METAL	4
07	LEVER ARM	2
08	SPRING	1
09	SPRING NEST (FEMALE)	1
10	SPRING NEST (MALE)	1
11	CONNECTING ROD	1
12	LEVER MOUTH	4
13	M.S.PLATE	4
14	HEXAGONAL SOCKET HEAD CAP SCREW	8
15	SPLIT PIN	16
16	LEVER ARM PIN 65 mm	4
17	LEVER ARM PIN 80 mm	2
18	NUT & BOLT FOR STOPPER	2
19	TEE HEAD NUT & BOLT WITH LOCK NUT FOR BASE PLATE	4
20	SSD COVER	1
29	TONGUE MOUTH	2
30	RAIL BUSH (GUN METAL)	2
31	STEEL WASHER	2
32	RAIL PIN	2
33 TO 39	CONNECTING ROD (INSULATED)	1

TABLE FOR ZU-1-60 THICK WEB SWITCH

DISTANCE OF HOLE IN FLANGE OF SWITCH	1 IN 12 (RDSO/T- 6155)	1 IN 8.5 (RDSO/T- 6280)	1 IN 16 (RDSO/T- 7076)
SSD ON SLEEPER No.	13	8	14
DISTANCE OF HOLE FOR FIXING TONGUE MOUTH FROM ϵ OF SLEEPER ON WHICH SSD IS FIXED	232	213	264 192
LOCATION OF TONGUE MOUTH IN BETWEEN SLEEPER No.	13 & 14	7 & 8	13 & 14

ALT: 5

ALT: 5

THIS DRAWING IS THE PROPERTY OF
RESEARCH DESIGNS AND STANDARDS ORGANISATION
(MINISTRY OF RAILWAYS)
LUCKNOW - 226011, INDIA.
AND SHALL NOT BE USED, COPIED OR REPRODUCED
IN PART OR WHOLE WITHOUT PRIOR CONSENT IN WRITING.

R. D. S. O.

SPRING SETTING DEVICE (SSD)
FOR USE WITH ZU-1-60
THICK-WEB SWITCHES B.G.
(1673 mm) FOR 60Kg(UIC)
ON P.S.C. SLEEPERS.

ADVANCE
28-11-2002
(T)

RDSO/T- 6216