Name : Rohita M
Roll no : 241501168

Exp No:7	Flow Control at Data Link Layer using Sliding Window Protocol

AIM:

Towriteaprogram that implements flowcontrol at the data link layer using the Sliding Window Protocol (Go-Back-N) and to simulate the flowofframes from one node to another.

ALGORITHM / PROCEDURE:

1. Read the total number of framesand the window size N. The sender may send up to N frames without waiting for an acknowledgement.
2. Keep two pointers at the sender: base (oldest unacknowledged frame) and nxt (next frame to send).
3. While nxt < base + N, send frame number nxt and increase nxt.
4. The receiver accepts frames in order. For each correct frame it sends an acknowledgement ACK (frame number + 1).
5. When the sender receives an ACK, the window slides forward by one position (base = base + 1).
6. If a frame is lost the receiver discards the later frames, the sender times out and sends again from the lost frame (Go-Back-N).
7. Repeat until all the frames are acknowledged and display the sequenceof events.

Fig 1: Sender window over the frame sequence


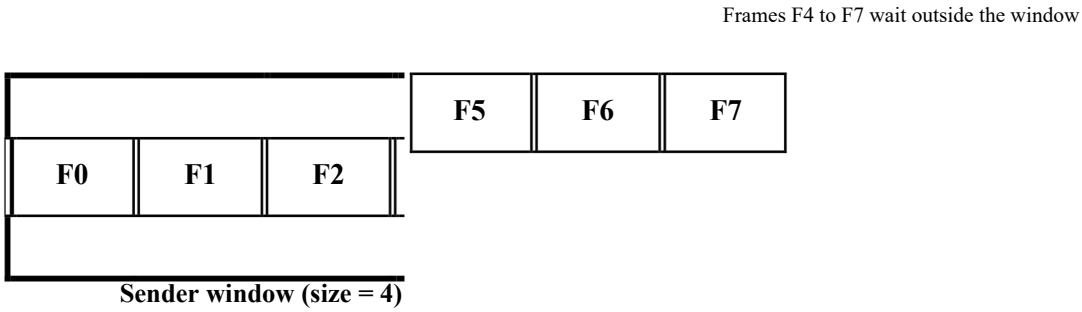


Fig 2: Frame and ACK exchange between sender and receiver

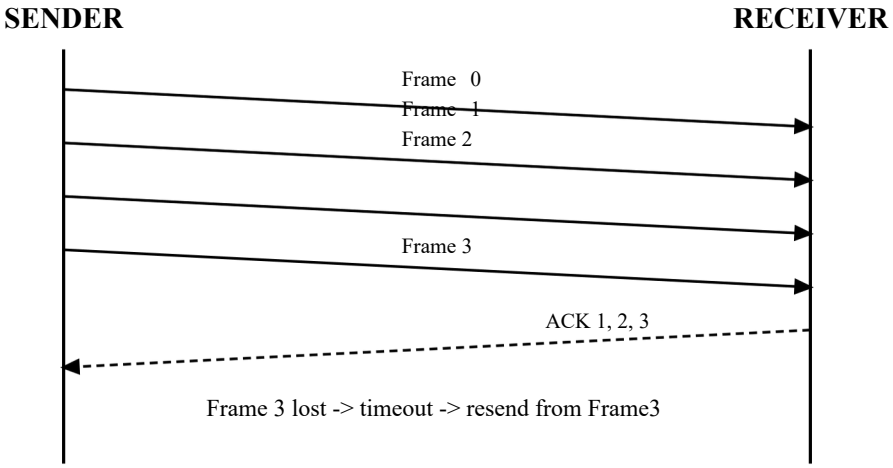


Name : Rohita M
Roll no : 241501168

PROGRAM:

```
# Sliding window protocol (Go-Back-N) simulation
TOTAL, WINDOW = 8, 4 LOST = {3}                    # frame 3 is lost
the first time it is sent

base = nxt = 0 lost_once = set(LOST) print(f"Total
frames = {TOTAL}, Window size = {WINDOW}\n") while base
< TOTAL:     while nxt < base + WINDOW and nxt < TOTAL:
        print(f"Sender   : Frame {nxt} sent    window=[{base}..{min(base+WINDOW,TOTAL)-
1}]")          nxt += 1     expected = base     for f in range(base, nxt):           iff
in lost_once:
               print(f"Network : Frame {f} LOST")
lost_once.discard(f)              print(f"Sender   : Timeout for frame {f},
resending from frame {f}")              nxt = f             break
print(f"Receiver : Frame {f} received, ACK {f + 1} sent")
print(f"Sender   : ACK {f + 1} received, window slides")         base = f + 1
print("\nAll frames transmitted successfully.")
```

OUTPUT:

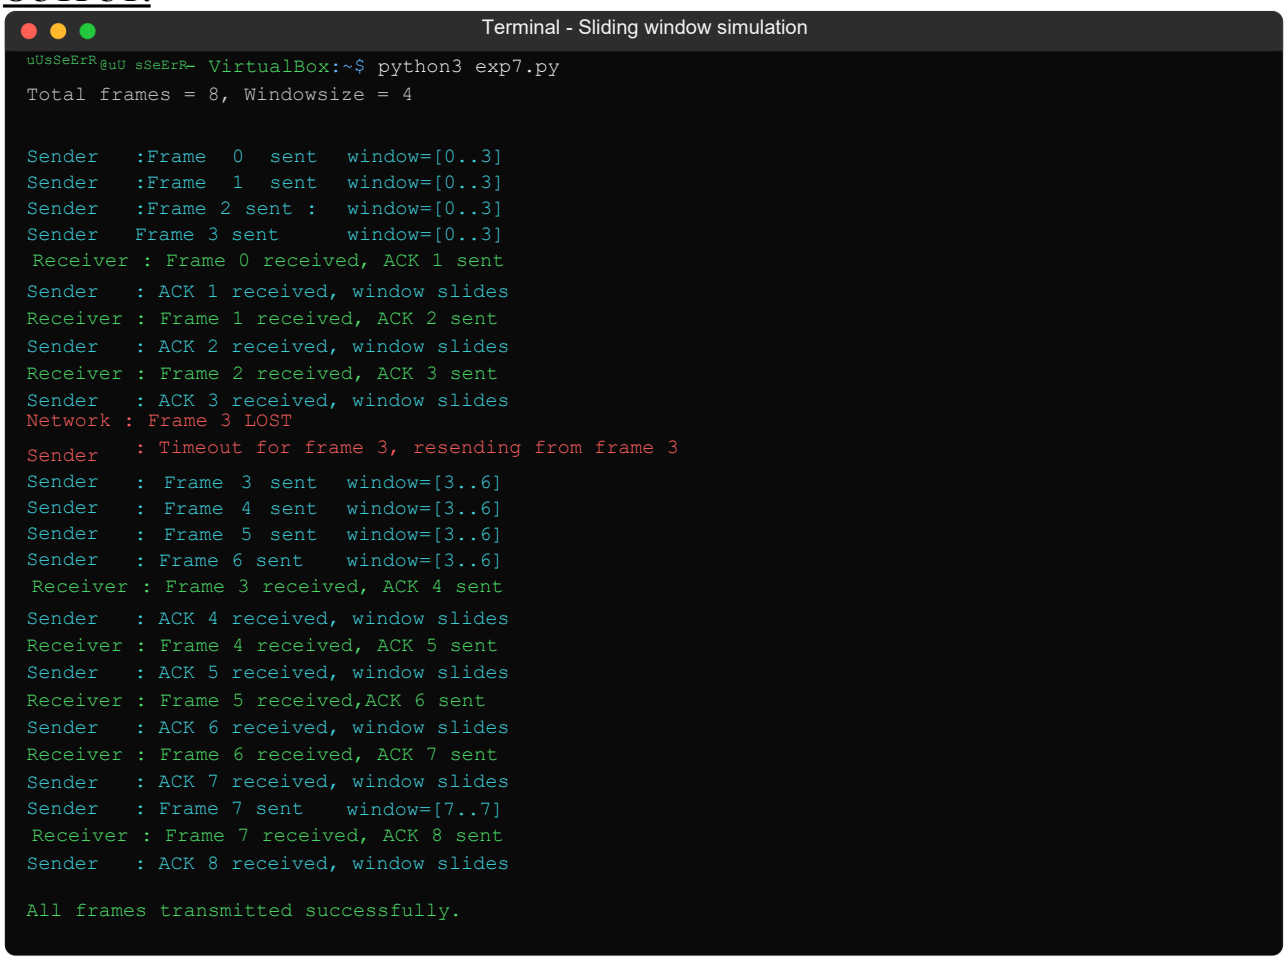

RESULT:

Thus the sliding window protocol was implemented and the transmission of 8 frames from the sender to the receiver was simulated successfully. The lost frame 3 was retransmitted after the timeout and all frames were delivered in order.