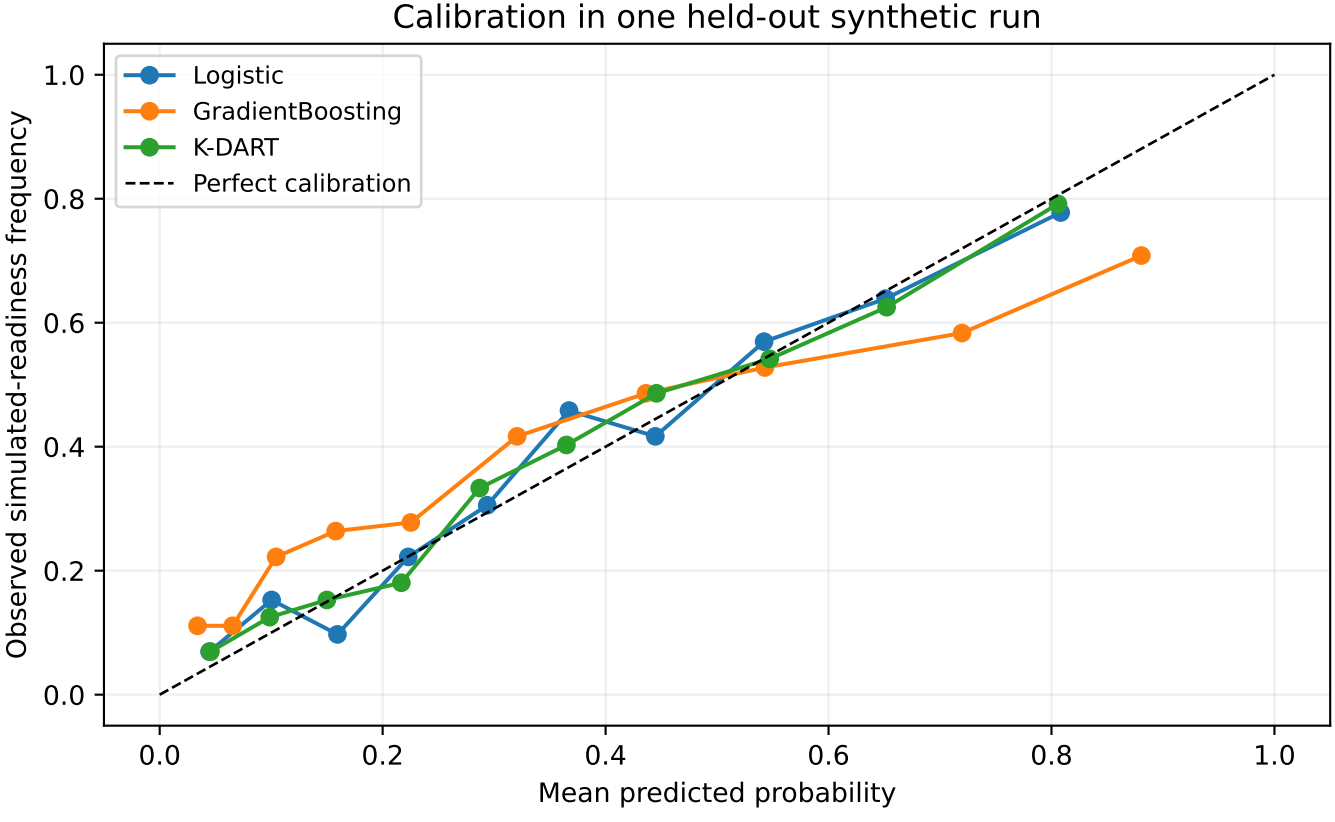
Calibration in one held-out synthetic run
Logistic
GradientBoosting
K-DART
Perfect calibration
Observed simulated-readiness frequency
Mean predicted probability
0.0
0.2
0.4
0.6
0.8
1.0