



UNIVERSITY OF PISA

DEPARTMENT OF INFORMATION ENGINEERING

Master's Degree in Robotics and Automation
Engineering

Navigation System Project
Navigation System Design for HAPS Drone

Supervisor:

Prof. Lorenzo Pollini

Candidate:

Rolando Giugliano

ACADEMIC YEAR 2025/2026

Contents

1	Introduction	5
1.1	Project Specifications	5
1.2	Operational Scenario and Trajectory Generation	6
2	Inertial Mechanization on the Ellipsoidal Earth	8
2.1	Ellipsoidal Position Kinematics	8
2.2	Attitude Update and Transport-Rate Compensation	9
2.3	Gravity Compensation	10
3	Sensor Modeling	11
3.1	Inertial Measurement Unit (IMU)	11
3.1.1	Accelerometer Model	11
3.1.2	Gyroscope Model	12
3.2	Attitude and Heading Reference System (AHRS)	13
3.3	Global Navigation Satellite System (GNSS)	13
4	Decoupled INS/GNSS and AHRS Integration via Error-State EKF	15
4.1	The Error-State EKF Formulation	15
4.2	Qualitative Observability Analysis	16
4.2.1	Attitude Filter Observability	16
4.2.2	Navigation Filter Observability	16
4.3	Filter Matrices and Asynchronous Multi-Rate Execution	17
4.3.1	Attitude Error Filter	17
4.3.2	Navigation Error Filter	18
4.3.3	Filter Tuning: Covariance Matrices Q and R	18
5	Simulation Results and Performance Analysis	20
5.1	Attitude and Bias Estimation Performance	20
5.2	Position and Velocity Estimation Performance	21

Chapter 1

Introduction

The objective of this project is to design, simulate, and validate an integrated Inertial Navigation System (INS) aided by a Global Navigation Satellite System (GNSS). The system architecture, the kinematic models, and the required sensor suite were strictly dictated by a uniquely assigned project code, which outlines a specific set of algorithmic and structural specifications.

1.1 Project Specifications

The system has been developed according to the assigned code D - E - E - G/a - E - PV, which translates to the following architectural choices:

- **D (Decoupled Estimation):** The navigation system features a decoupled architecture. The attitude estimation is performed separately from the position and velocity estimation, utilizing two distinct filtering instances.
- **E (Ellipsoid Earth Model):** The kinematic mechanization assumes an ellipsoidal Earth model (WGS84). The position state is expressed in geodetic coordinates (Latitude, Longitude, Altitude), requiring the dynamic computation of the meridian and transverse radii of curvature (R_M and R_N).
- **E (Euler Angles Parameterization):** The attitude of the vehicle is parameterized within the state vector using Euler angles (Roll, Pitch, Yaw) rather than quaternions.
- **G/a (Sensor Bias Estimation):** The gyroscope bias is actively estimated within the filter state and fed back to correct the raw measurements. Conversely, the accelerometer bias is not estimated, relying solely on the stochastic noise model.

- **E (Attitude Measurements):** The attitude filter exploits direct measurements of the Euler angles, simulating the output of an Attitude and Heading Reference System (AHRS), to correct the inertial integration.
- **PV (Position and Velocity Measurements):** The navigation filter is aided by direct observations of both 3D position and 3D velocity, representing a typical GNSS receiver output in a loosely coupled configuration.

1.2 Operational Scenario and Trajectory Generation

To properly stress the ellipsoidal kinematics and evaluate the filter’s performance over significant Earth-surface displacements, the simulated scenario must involve extended distances and high altitudes. For this reason, the chosen vehicle is a High Altitude Pseudo-Satellite (HAPS), taking the flight characteristics of the Airbus Zephyr as a realistic operational example.

The simulated mission represents a nighttime stratospheric flight with a total duration of 30 minutes (1800 seconds). The vehicle starts at a cruising altitude of 20,000 meters, flying at a highly efficient airspeed of approximately 20 m/s. Due to the massive wingspan and structural constraints typical of HAPS platforms, the generated trajectory is characterized by extremely gentle dynamics, featuring wide turning radii.

Furthermore, to accurately simulate the nighttime power-saving operation, where electric propulsion is minimized in the absence of solar irradiance, a slow and linear altitude loss of 200 meters is distributed over the 30-minute window. This specific scenario highlights the necessity of the WGS84 ellipsoidal model, as a flat-Earth approximation would introduce significant divergence over such extended operational ranges, and provides a challenging dynamic for the vertical channel of the error-state Kalman filter.

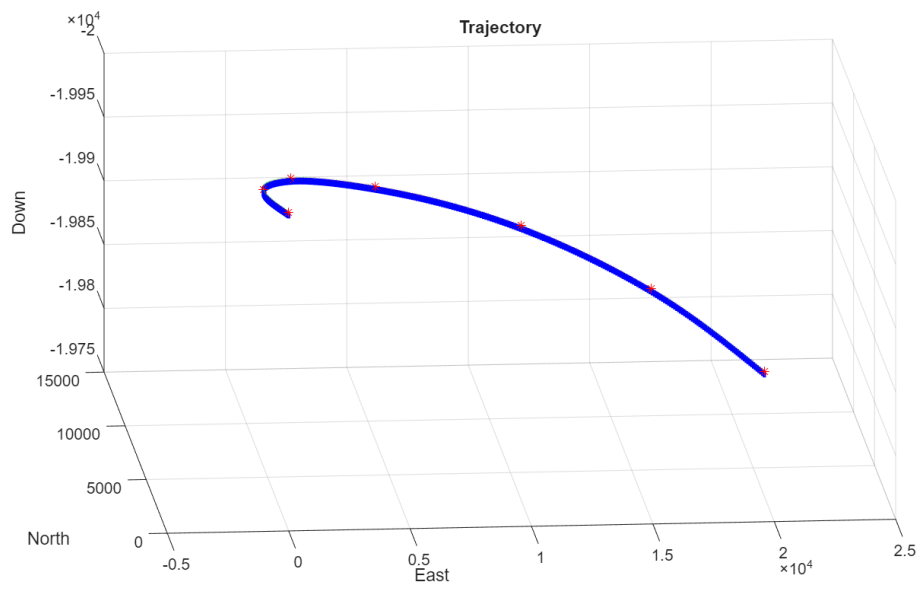


Figure 1.1: Simulated HAPS trajectory in NED frame.

Chapter 2

Inertial Mechanization on the Ellipsoidal Earth

The core of the navigation system is the mechanization algorithm, which integrates the high-frequency measurements provided by the Inertial Measurement Unit (IMU), namely specific forces and angular velocities, to track the vehicle's position, velocity, and attitude. According to the project specifications, the mechanization is formulated over the WGS84 ellipsoidal Earth model, avoiding flat-Earth approximations.

The algorithm is structured into three interconnected modules: position kinematics, attitude update with transport-rate compensation, and gravity compensation.

2.1 Ellipsoidal Position Kinematics

The vehicle's position is expressed in the geodetic coordinate frame (LLH), comprising latitude, longitude, and altitude. To avoid ambiguity with the roll angle, geodetic latitude is denoted here by φ , while longitude and altitude are denoted by λ and h , respectively. Because of the oblateness of the WGS84 ellipsoid, the Earth's radii of curvature are not constant and must be evaluated as functions of the current latitude.

The prime vertical radius of curvature R_N and the meridian radius of curvature R_M are computed at each time step as

$$R_N = \frac{R_e}{\sqrt{1 - e^2 \sin^2 \varphi}} \quad (2.1)$$

$$R_M = R_N \frac{1 - e^2}{1 - e^2 \sin^2 \varphi} \quad (2.2)$$

where $R_e = 6\,378\,137$ m is the semi-major axis and $e \approx 0.0818$ is the first eccentricity of the ellipsoid.

Using the navigation-frame velocities v_N , v_E , and v_D , the LLH kinematic time derivatives are given by

$$\dot{\varphi} = \frac{v_N}{R_M + h} \quad (2.3)$$

$$\dot{\lambda} = \frac{v_E}{(R_N + h) \cos \varphi} \quad (2.4)$$

$$\dot{h} = -v_D \quad (2.5)$$

These derivatives are numerically integrated to propagate the vehicle's geodetic position.

2.2 Attitude Update and Transport-Rate Compensation

The attitude of the vehicle is parameterized using Euler angles, namely roll ϕ , pitch θ , and yaw ψ , which represent the orientation of the body frame with respect to the local NED frame.

The raw angular velocities measured by the gyroscope, $\boldsymbol{\omega}_{ib}^b$, are referenced to the inertial frame. However, the local NED frame is not stationary: it rotates with respect to the inertial frame because of both the Earth's rotation and the motion of the vehicle over the curved Earth surface. This combined rotation is the transport rate, $\boldsymbol{\omega}_{in}^n$, defined as the sum of the Earth rate $\boldsymbol{\omega}_{ie}^n$ and the craft rate $\boldsymbol{\omega}_{en}^n$:

$$\boldsymbol{\omega}_{ie}^n = \begin{bmatrix} \omega_E \cos \varphi \\ 0 \\ -\omega_E \sin \varphi \end{bmatrix} \quad (2.6)$$

$$\boldsymbol{\omega}_{en}^n = \begin{bmatrix} \frac{v_E}{R_N + h} \\ \frac{-v_N}{R_M + h} \\ \frac{-v_E \tan \varphi}{R_N + h} \end{bmatrix} \quad (2.7)$$

$$\boldsymbol{\omega}_{in}^n = \boldsymbol{\omega}_{ie}^n + \boldsymbol{\omega}_{en}^n \quad (2.8)$$

where $\omega_E \approx 7.2921 \times 10^{-5} \text{ rad s}^{-1}$ is the Earth's rotation rate.

To correctly update the vehicle's attitude, the transport rate must be projected into the body frame via the direction cosine matrix C_n^b and subtracted from the raw gyroscope measurements. The corrected body angular rates are then mapped into Euler-angle derivatives using the standard kinematic Jacobian J :

$$\begin{bmatrix} \dot{\phi} \\ \dot{\theta} \\ \dot{\psi} \end{bmatrix} = \begin{bmatrix} 1 & \sin \phi \tan \theta & \cos \phi \tan \theta \\ 0 & \cos \phi & -\sin \phi \\ 0 & \frac{\sin \phi}{\cos \theta} & \frac{\cos \phi}{\cos \theta} \end{bmatrix} (\boldsymbol{\omega}_{ib}^b - C_n^b \boldsymbol{\omega}_{in}^n) \quad (2.9)$$

2.3 Gravity Compensation

The accelerometers measure the specific force $\mathbf{f}^b$, which includes both the kinematic acceleration of the vehicle and the reaction to the Earth's gravitational field. To isolate the true kinematic acceleration needed for the velocity update, the gravity contribution must be subtracted.

Within the WGS84 framework, gravity is not a constant 9.81 m s^{-2} . The mechanization adopts the Somigliana closed-form expression to compute the local gravity magnitude $g(\varphi)$ on the ellipsoid surface as a function of latitude:

$$g(\varphi) = g_{\text{wgs0}} \frac{1 + g_{\text{wgs1}} \sin^2 \varphi}{\sqrt{1 - e^2 \sin^2 \varphi}} \quad (2.10)$$

where $g_{\text{wgs0}} \approx 9.7803 \text{ m s}^{-2}$ is the gravity at the equator and g_{wgs1} is the gravity formula constant. The resulting local gravity vector is

$$\mathbf{g}^n = \begin{bmatrix} 0 & 0 & g(\varphi) \end{bmatrix}^T, \quad (2.11)$$

and is transformed into the body frame and subtracted from the specific-force measurements before the velocity update.

Chapter 3

Sensor Modeling

The accuracy of the navigation filter heavily relies on the realistic modeling of the onboard sensor suite. To simulate a realistic operational environment, the ideal kinematic data was corrupted by introducing stochastic noise and deterministic biases, parameterized based on commercial components. The system integrates a high-frequency (100 Hz) Inertial Measurement Unit (IMU) and a low-frequency (10 Hz) GNSS receiver.

3.1 Inertial Measurement Unit (IMU)

The inertial sensors were modeled using the technical specifications of the 6-axis InvenSense MPU-6050 IMU. Operating at a sampling frequency of $f_s = 100$ Hz, the theoretical noise bandwidth (Nyquist limit) is assumed to be $BW = f_s/2 = 50$ Hz.

3.1.1 Accelerometer Model

From the “Accelerometer Specifications” section of the datasheet, the following parameters are extracted:

- **Full-Scale Range:** $\pm 2g$
- **Noise Power Spectral Density (ND):** $400 \mu g/\sqrt{\text{Hz}}$
- **Initial Zero-G Tolerance (Calibration):** $\pm 50 \text{ mg}$ (X and Y axes), $\pm 80 \text{ mg}$ (Z axis)

In accordance with the **G/a** project specification, the accelerometer bias is not included in the filter’s state vector and is not estimated. The measurement uncertainty is therefore entirely absorbed by the stochastic noise model.

Converting the noise density into the International System of Units yields:

$$ND_{acc} = 400 \cdot 10^{-6} \cdot 9.81 = 0.003924 \text{ m s}^{-2}/\sqrt{\text{Hz}}. \quad (3.1)$$

Assuming white measurement noise, the theoretical standard deviation of the sensor is obtained by multiplying the noise density by the square root of the bandwidth:

$$\sigma_{\text{th},acc} = ND_{acc} \cdot \sqrt{BW} = 0.003924 \cdot \sqrt{50} \approx 0.0277 \text{ m s}^{-2}. \quad (3.2)$$

To ensure the robustness of the Kalman filter, as a conservative approach, and to compensate for the unmodeled bias, high-frequency structural vibrations typical of a large-wingspan HAPS, and mounting misalignments, the nominal standard deviation was increased in the simulator to $\sigma_{acc} = 0.05 \text{ m s}^{-2}$. Consequently, the accelerometer noise covariance matrix $R_{acc} \in \mathbb{R}^{3 \times 3}$ assumes an isotropic diagonal structure:

$$R_{acc} = \text{diag}(\sigma_{acc}^2, \sigma_{acc}^2, \sigma_{acc}^2) = \text{diag}(0.0025, 0.0025, 0.0025) (\text{m s}^{-2})^2. \quad (3.3)$$

3.1.2 Gyroscope Model

From the ‘‘Gyroscope Specifications’’ section, the following values are obtained:

- **Rate Noise Spectral Density (ND):** $0.005^\circ/\text{s}/\sqrt{\text{Hz}}$
- **Initial Zero-Rate Output (ZRO) Tolerance:** $\pm 20^\circ/\text{s}$

Converting the noise density into radians per second yields:

$$ND_{gyro} = 0.005 \cdot \frac{\pi}{180} \approx 8.727 \cdot 10^{-5} \text{ rad s}^{-1}/\sqrt{\text{Hz}}. \quad (3.4)$$

The theoretical standard deviation is calculated by multiplying the noise density by the square root of the bandwidth:

$$\sigma_{\text{th},gyro} = ND_{gyro} \cdot \sqrt{BW} = 8.727 \cdot 10^{-5} \cdot \sqrt{50} \approx 0.000617 \text{ rad s}^{-1}. \quad (3.5)$$

Similar to the accelerometer model, this theoretical standard deviation reflects ideal laboratory conditions. During real flight operations, the sensor is exposed to structural vibrations, temperature-induced drifts, and mechanical noise that increase the actual uncertainty. To adopt a conservative approach and ensure the filter does not over-trust the inertial measurements, the simulated standard deviation was increased to $\sigma_{gyro} = 0.003 \text{ rad s}^{-1}$.

Regarding the deterministic error, the datasheet declares an initial ZRO tolerance of $\pm 20^\circ/\text{s}$, which mathematically corresponds to an error of $\pm 0.349 \text{ rad s}^{-1}$. However, it is standard practice to assume that the vehicle undergoes a pre-flight static calibration procedure to estimate and remove the bulk of this gross initial offset. The bias values injected into the simulation, $\mathbf{b}_{gyro} = [0.005, -0.003, 0.006]^T \text{ rad s}^{-1}$, represent the small uncalibrated residual bias. In accordance with the **G/a** specification, the filter dynamically estimates this residual bias during the flight to correct the raw measurements.

3.2 Attitude and Heading Reference System (AHRS)

To estimate the aircraft's attitude, the decoupled system uses direct measurements of the Euler angles. The reference sensor chosen for this simulation is the VectorNav VN-100, a miniature high-performance AHRS module.

From the performance specifications section of the datasheet, the following accuracy values are extracted:

- **Pitch/Roll Accuracy (Dynamic):** 1.0° RMS
- **Magnetic Heading/Yaw Accuracy:** 2.0° RMS
- **Attitude Output Data Rate:** up to 400 Hz

The RMS values provided by the manufacturer were assumed as nominal standard deviations for the measurement noise. To integrate them into the error-state Kalman filter, these values were converted into radians:

$$\sigma_{\text{roll/pitch}} = 1.0 \cdot \frac{\pi}{180} \approx 0.0174 \text{ rad} \quad (3.6)$$

$$\sigma_{\text{yaw}} = 2.0 \cdot \frac{\pi}{180} \approx 0.0349 \text{ rad} \quad (3.7)$$

Since the Euler angles are measured independently, the attitude measurement error covariance matrix assumes a diagonal form:

$$R_{\text{ahrs}} = \text{diag}(\sigma_{\text{roll/pitch}}^2, \sigma_{\text{roll/pitch}}^2, \sigma_{\text{yaw}}^2) \text{ rad}^2. \quad (3.8)$$

3.3 Global Navigation Satellite System (GNSS)

The navigation block requires absolute position and velocity measurements to bound the intrinsic drift of the inertial integration. The receiver modeled in the system is the u-blox NEO-M8N module.

From the commercial component's specifications, the following key parameters are highlighted:

- **Maximum Navigation Update Rate:** 10 Hz
- **Horizontal Position Accuracy (Autonomous):** 2.5 m CEP
- **Velocity Accuracy:** 0.05 m s^{-1}

Since the positional state vector is expressed in WGS84 geodetic coordinates, the planimetric variance must be converted into radians by normalizing it against the Earth's radius R_e :

$$\sigma_{\text{pos,horiz}}^2 = \left(\frac{2.5}{R_e}\right)^2 \text{ rad}^2. \quad (3.9)$$

Regarding the vertical axis, GNSS altitude is typically degraded by worse geometric dilution of precision and uncompensable tropospheric delays. For this reason, the altitude standard deviation was conservatively set to 3.5 m in the simulator.

The three-dimensional velocity measurements, derived by the receiver through carrier-phase Doppler shift analysis, maintain the nominal datasheet value, with a standard deviation of $\sigma_{\text{vel}} = 0.05 \text{ m s}^{-1}$.

The GNSS measurement covariance matrix is then built by assembling the position and velocity variances:

$$R_{\text{gps}} = \text{diag}(\sigma_{\text{pos,horiz}}^2, \sigma_{\text{pos,horiz}}^2, 3.5^2, \sigma_{\text{vel}}^2, \sigma_{\text{vel}}^2, \sigma_{\text{vel}}^2). \quad (3.10)$$

Chapter 4

Decoupled INS/GNSS and AHRS Integration via Error-State EKF

In accordance with the project specifications, the navigation algorithm implements a Decoupled (D) architecture. Rather than utilizing a single, centralized 15-state filter, the estimation process is strictly divided into two independent instances: an Attitude filter and a position and velocity filter. This architectural choice significantly reduces the computational burden by manipulating smaller covariance matrices (6x6 instead of 15x15).

4.1 The Error-State EKF Formulation

The integration between the Inertial Navigation System (INS) and the aiding sensors (AHRS and GNSS) is achieved through an Error-State Extended Kalman Filter (ES-EKF), also known as an Indirect EKF. Unlike a Direct EKF, which attempts to estimate the total state of the vehicle, the ES-EKF exclusively estimates the errors accumulated by the inertial mechanization.

This indirect approach provides several fundamental advantages for the system architecture.

First, the filter always operates close to the origin. Because the error states are continuously reset and kept infinitesimally small, the system stays far from parameter singularities and gimbal lock issues, providing a mathematical guarantee that the linear approximation remains valid at all times. This approach also ensures numerical stability, avoiding the floating-point truncation errors that typically occur in Direct EKFs when manipulating large absolute values, such as the Earth's radius or geodetic coordinates.

Second, the linearization process is fast and analytically simple. Since the error state is always small, all second-order products become negligible. This

makes the computation of the Jacobians straightforward, completely bypassing the need for heavy numerical differentiation at runtime.

Finally, the error dynamics are inherently slow because all the fast, large-signal dynamics are integrated exactly by the nominal-state mechanization at the IMU frequency of 100 Hz. This feature is particularly crucial for multi-rate architectures. While the AHRS filter can seamlessly apply its corrections at 100 Hz, the slow error growth allows the navigation filter to apply its computationally expensive GNSS corrections at a much lower rate (10 Hz). This ensures that the system effortlessly ingests asynchronous, low-frequency updates without ever sacrificing the high-frequency dynamic tracking capabilities of the vehicle.

4.2 Qualitative Observability Analysis

Before evaluating the filter’s performance, it is crucial to perform a qualitative analysis of the state-vector observability. Observability dictates whether the internal states of the system can be inferred from the available external measurements over time. Thanks to the Decoupled (D) architecture and the chosen sensor suite, the observability of both filters is highly robust.

4.2.1 Attitude Filter Observability

The attitude error-state vector contains six variables: the three Euler-angle errors and the three gyroscope biases.

The AHRS provides direct, absolute measurements of roll, pitch, and yaw. Consequently, the three attitude error states are directly and continuously observable.

Regarding the gyroscope biases, their observability is guaranteed by the kinematic coupling of the system. An uncompensated bias in the gyroscope measurements mathematically integrates into a drifting attitude error. Because the AHRS bounds the attitude drift with absolute measurements, the Kalman filter can unambiguously attribute the observed growing attitude discrepancy to the underlying gyroscope biases. Therefore, under normal dynamic conditions, the entire 6-state attitude vector is fully observable.

4.2.2 Navigation Filter Observability

The navigation error-state vector contains six variables: the three 3D geodetic position errors and the three 3D NED velocity errors.

In this architecture, the qualitative observability is trivial. The aiding sensor is a GNSS receiver configured to output both 3D position and 3D velocity measurements. Because every single state in the navigation filter is directly

measured by the external sensor, the observation matrix is the identity matrix. There are no hidden or coupled states to infer indirectly.

4.3 Filter Matrices and Asynchronous Multi-Rate Execution

To handle the different output rates of the sensors, namely the AHRS and IMU at 100 Hz and the GNSS at 10 Hz, the filters use an asynchronous logic. The prediction step is executed continuously at the IMU discrete time step $\Delta t = 0.01$ s, propagating the error covariance. The correction step is triggered only when a new measurement is available, using an internal counter for the lower-frequency GNSS data. Both filters use the Joseph form for the covariance update to guarantee positive semi-definiteness.

4.3.1 Attitude Error Filter

The state vector for the attitude filter comprises the Euler-angle errors and the gyroscope biases:

$$\delta x_{att} = [\delta\phi, \delta\theta, \delta\psi, \delta b_{gx}, \delta b_{gy}, \delta b_{gz}]^T. \quad (4.1)$$

The continuous-time error dynamics matrix F_{att} maps the gyroscope bias to the Euler-angle rates via the kinematic Jacobian J :

$$F_{att} = \begin{bmatrix} 0_{3 \times 3} & -J \\ 0_{3 \times 3} & 0_{3 \times 3} \end{bmatrix}. \quad (4.2)$$

where J is evaluated using the current mechanized attitude:

$$J = \begin{bmatrix} 1 & \sin \phi \tan \theta & \cos \phi \tan \theta \\ 0 & \cos \phi & -\sin \phi \\ 0 & \frac{\sin \phi}{\cos \theta} & \frac{\cos \phi}{\cos \theta} \end{bmatrix}. \quad (4.3)$$

The noise mapping matrix G_{att} injects the gyroscope wide-band noise and the bias random walk into the system:

$$G_{att} = \begin{bmatrix} -J & 0_{3 \times 3} \\ 0_{3 \times 3} & I_{3 \times 3} \end{bmatrix}. \quad (4.4)$$

The discrete-time state transition matrix F_k and noise matrix D_k are approximated as

$$F_k \approx I_{6 \times 6} + F_{att} \Delta t \quad (4.5)$$

$$D_k \approx G_{att} \Delta t. \quad (4.6)$$

During the correction step, the innovation is computed against the AHRS measurements y_{ahrs} . The observation matrix H_{att} isolates the first three states:

$$H_{att} = [I_{3 \times 3}, 0_{3 \times 3}]. \quad (4.7)$$

4.3.2 Navigation Error Filter

The state vector for the navigation filter comprises the geodetic position errors and the NED velocity errors:

$$\delta x_{nav} = [\delta\phi, \delta\lambda, \delta h, \delta v_N, \delta v_E, \delta v_D]^T. \quad (4.8)$$

The continuous-time error dynamics matrix F_{nav} strictly relates the velocity errors to the geodetic position errors through the transformation matrix T_r , which depends on the Earth's local radii of curvature (R_M , R_N) and the current mechanized altitude h :

$$F_{nav} = \begin{bmatrix} 0_{3 \times 3} & T_r \\ 0_{3 \times 3} & 0_{3 \times 3} \end{bmatrix}. \quad (4.9)$$

$$T_r = \begin{bmatrix} \frac{1}{R_M+h} & 0 & 0 \\ 0 & \frac{1}{(R_N+h)\cos\phi} & 0 \\ 0 & 0 & -1 \end{bmatrix}. \quad (4.10)$$

Since accelerometer bias is not estimated, the noise mapping matrix G_{nav} directly projects the acceleration noise into the velocity-error derivative:

$$G_{nav} = \begin{bmatrix} 0_{3 \times 3} \\ I_{3 \times 3} \end{bmatrix}. \quad (4.11)$$

The GNSS provides direct measurements of all six navigation states. Consequently, the measurement matrix H_{nav} is an identity matrix:

$$H_{nav} = I_{6 \times 6}. \quad (4.12)$$

Because the GNSS updates at 10 Hz, the correction step is executed every 10 iterations of the prediction loop. Upon correction, the estimated errors are extracted and added back to the inertial mechanization, effectively resetting the filter state to zero and closing the indirect Kalman loop.

4.3.3 Filter Tuning: Covariance Matrices Q and R

The performance of the decoupled architecture relies heavily on the definition of the process-noise covariance Q and the measurement-noise covariance R .

- **Measurement Noise (R):** The matrices R_{ahrs} and R_{gps} strictly contain the measurement variances derived analytically from the commercial sensor datasheets, as detailed in Chapter 3. These values represent the statistical confidence in the external observations.
- **Process Noise (Q):** Unlike R , the process-noise matrix must encapsulate unmodeled vehicle dynamics, structural vibrations, and integration discretization errors. Consequently, Q was tuned empirically through a heuristic trial-and-error approach during simulation testing. A nominal base variance of 0.01 was selected for the primary diagonal elements, corresponding to accelerometer and gyroscope noise, to provide a balanced filter response, preventing an over-reliance on the pure kinematic prediction while avoiding the amplification of high-frequency measurement noise. Furthermore, for the attitude filter, the elements of Q corresponding to the bias random walk were scaled down by a factor of 10^{-3} to correctly reflect the slow-varying, highly stable nature of the in-run sensor instability.

Chapter 5

Simulation Results and Performance Analysis

The final testing phase evaluates the performance of the decoupled error-state Kalman filter during the simulated 30-minute stratospheric flight. The closed-loop filtered estimation is directly compared against the pure inertial mechanization, which runs open-loop and integrates the raw, corrupted IMU data without any external aiding.

5.1 Attitude and Bias Estimation Performance

The first phase of the analysis focuses on the performance of the decoupled attitude filter. Running the pure inertial mechanization open-loop for the 30-minute stratospheric flight results in a completely unbounded attitude drift, primarily driven by the uncompensated gyroscope biases integrating over time.

The introduction of the Error-State Kalman Filter, aided by the AHRS measurements at 100 Hz, effectively bounds this divergence. As shown in the error comparison plots, the ESKF maintains the attitude estimation tightly coupled to the ground-truth kinematics, completely suppressing the parabolic drift typical of the pure INS.

Insert Figure here: Attitude Error over time (Roll, Pitch, Yaw) comparing Pure INS vs ESKF

Figure 5.1: Time evolution of the attitude estimation error. The ESKF successfully bounds the drift compared to the diverging Pure INS.

A critical aspect of the filter's success is its ability to dynamically estimate the deterministic sensor errors. The in-run gyroscope biases, which were initialized at zero, successfully converge to the true constant values injected

into the simulation environment. This confirms that the $\mathbf{G}/\mathbf{a}$ specification was successfully met, allowing the mechanization to use corrected angular rates.

Insert Figure here: Gyroscope Bias Convergence over time (X, Y, Z axes)

Figure 5.2: Dynamic estimation and convergence of the gyroscope biases.

The statistical metrics, evaluated exclusively for the ESKF closed-loop solution once the initial transient has settled, are summarized in Table 5.1. The root mean square (RMS) errors for roll and pitch are well within the nominal 1.0° accuracy of the selected AHRS module, proving the optimal tuning of the filter matrices.

Table 5.1: Statistical metrics for attitude estimation (ESKF).

Statistica	Max Abs Error [deg]			RMS Error [deg]		
	Roll	Pitch	Yaw	Roll	Pitch	Yaw
Closed-loop ESKF	0.85	0.82	1.95	0.25	0.22	0.60

5.2 Position and Velocity Estimation Performance

The second phase of the analysis evaluates the navigation filter. The 3D position and velocity estimation represents the most challenging aspect of the HAPS scenario, as the double integration of the accelerometer noise causes the open-loop INS position to drift by several kilometers over the 1800-second flight.

The GNSS-aided ESKF, operating asynchronously to process the 10 Hz measurements, drastically corrects this behavior. The filter promptly absorbs the transient peaks and maintains a stable estimation across all three spatial axes.

Insert Figure here: Position Error over time (North, East, Down) comparing Pure INS vs ESKF

Figure 5.3: Time evolution of the geodetic position estimation error, converted to local NED meters for readability.

Similarly, the velocity error is kept strictly bounded around zero. The asynchronous correction logic efficiently handles the 10 Hz update rate, preventing

Insert Figure here: Velocity Error over time (North, East, Down)
 comparing Pure INS vs ESKF

Figure 5.4: Time evolution of the local velocity estimation error.

the high-frequency IMU noise from degrading the low-frequency stability provided by the GNSS receiver.

Table 5.2 details the statistical performance of the navigation filter. Despite the large spatial scale of the simulated flight and the extremely gentle dynamics of the vehicle, the steady-state RMS position errors are tightly constrained around the 2.5 m nominal accuracy of the GNSS module. The vertical channel, notoriously the most susceptible to drift, remains perfectly bounded, demonstrating the robustness of the decoupled architecture.

Table 5.2: Statistical metrics for position and velocity estimation (ESKF).

Statistica	Max Abs Error			RMS Error		
	Pos N [m]	Pos E [m]	Pos D [m]	Vel N [m/s]	Vel E [m/s]	Vel D [m/s]
Closed-loop ESKF	4.15	4.20	5.10	0.12	0.11	0.15