

BOM notes

- By default:
- All resistors are 1% 0.125W thick film
 - All non-polarized capacitors are:
 - rated voltage $\geq 16V$
 - $\geq 1nF$: X7R, 20% or better
 - $< 1nF$: C0G, 5% or better

Spec and Tolerance fields may provide more strict requirements compared to defaults.
The ultimate part specification is always given by Mfr, Mfr PN fields in the BOM.


R. Dobrodii

Sheet: /
File: lwdo-sdr.kicad_sch


Title: LWDO-SDR

Size: A3 Date: 2022-02-15
KiCad E.D.A. kicad 6.0.4

Rev: 1
Id: 1/14

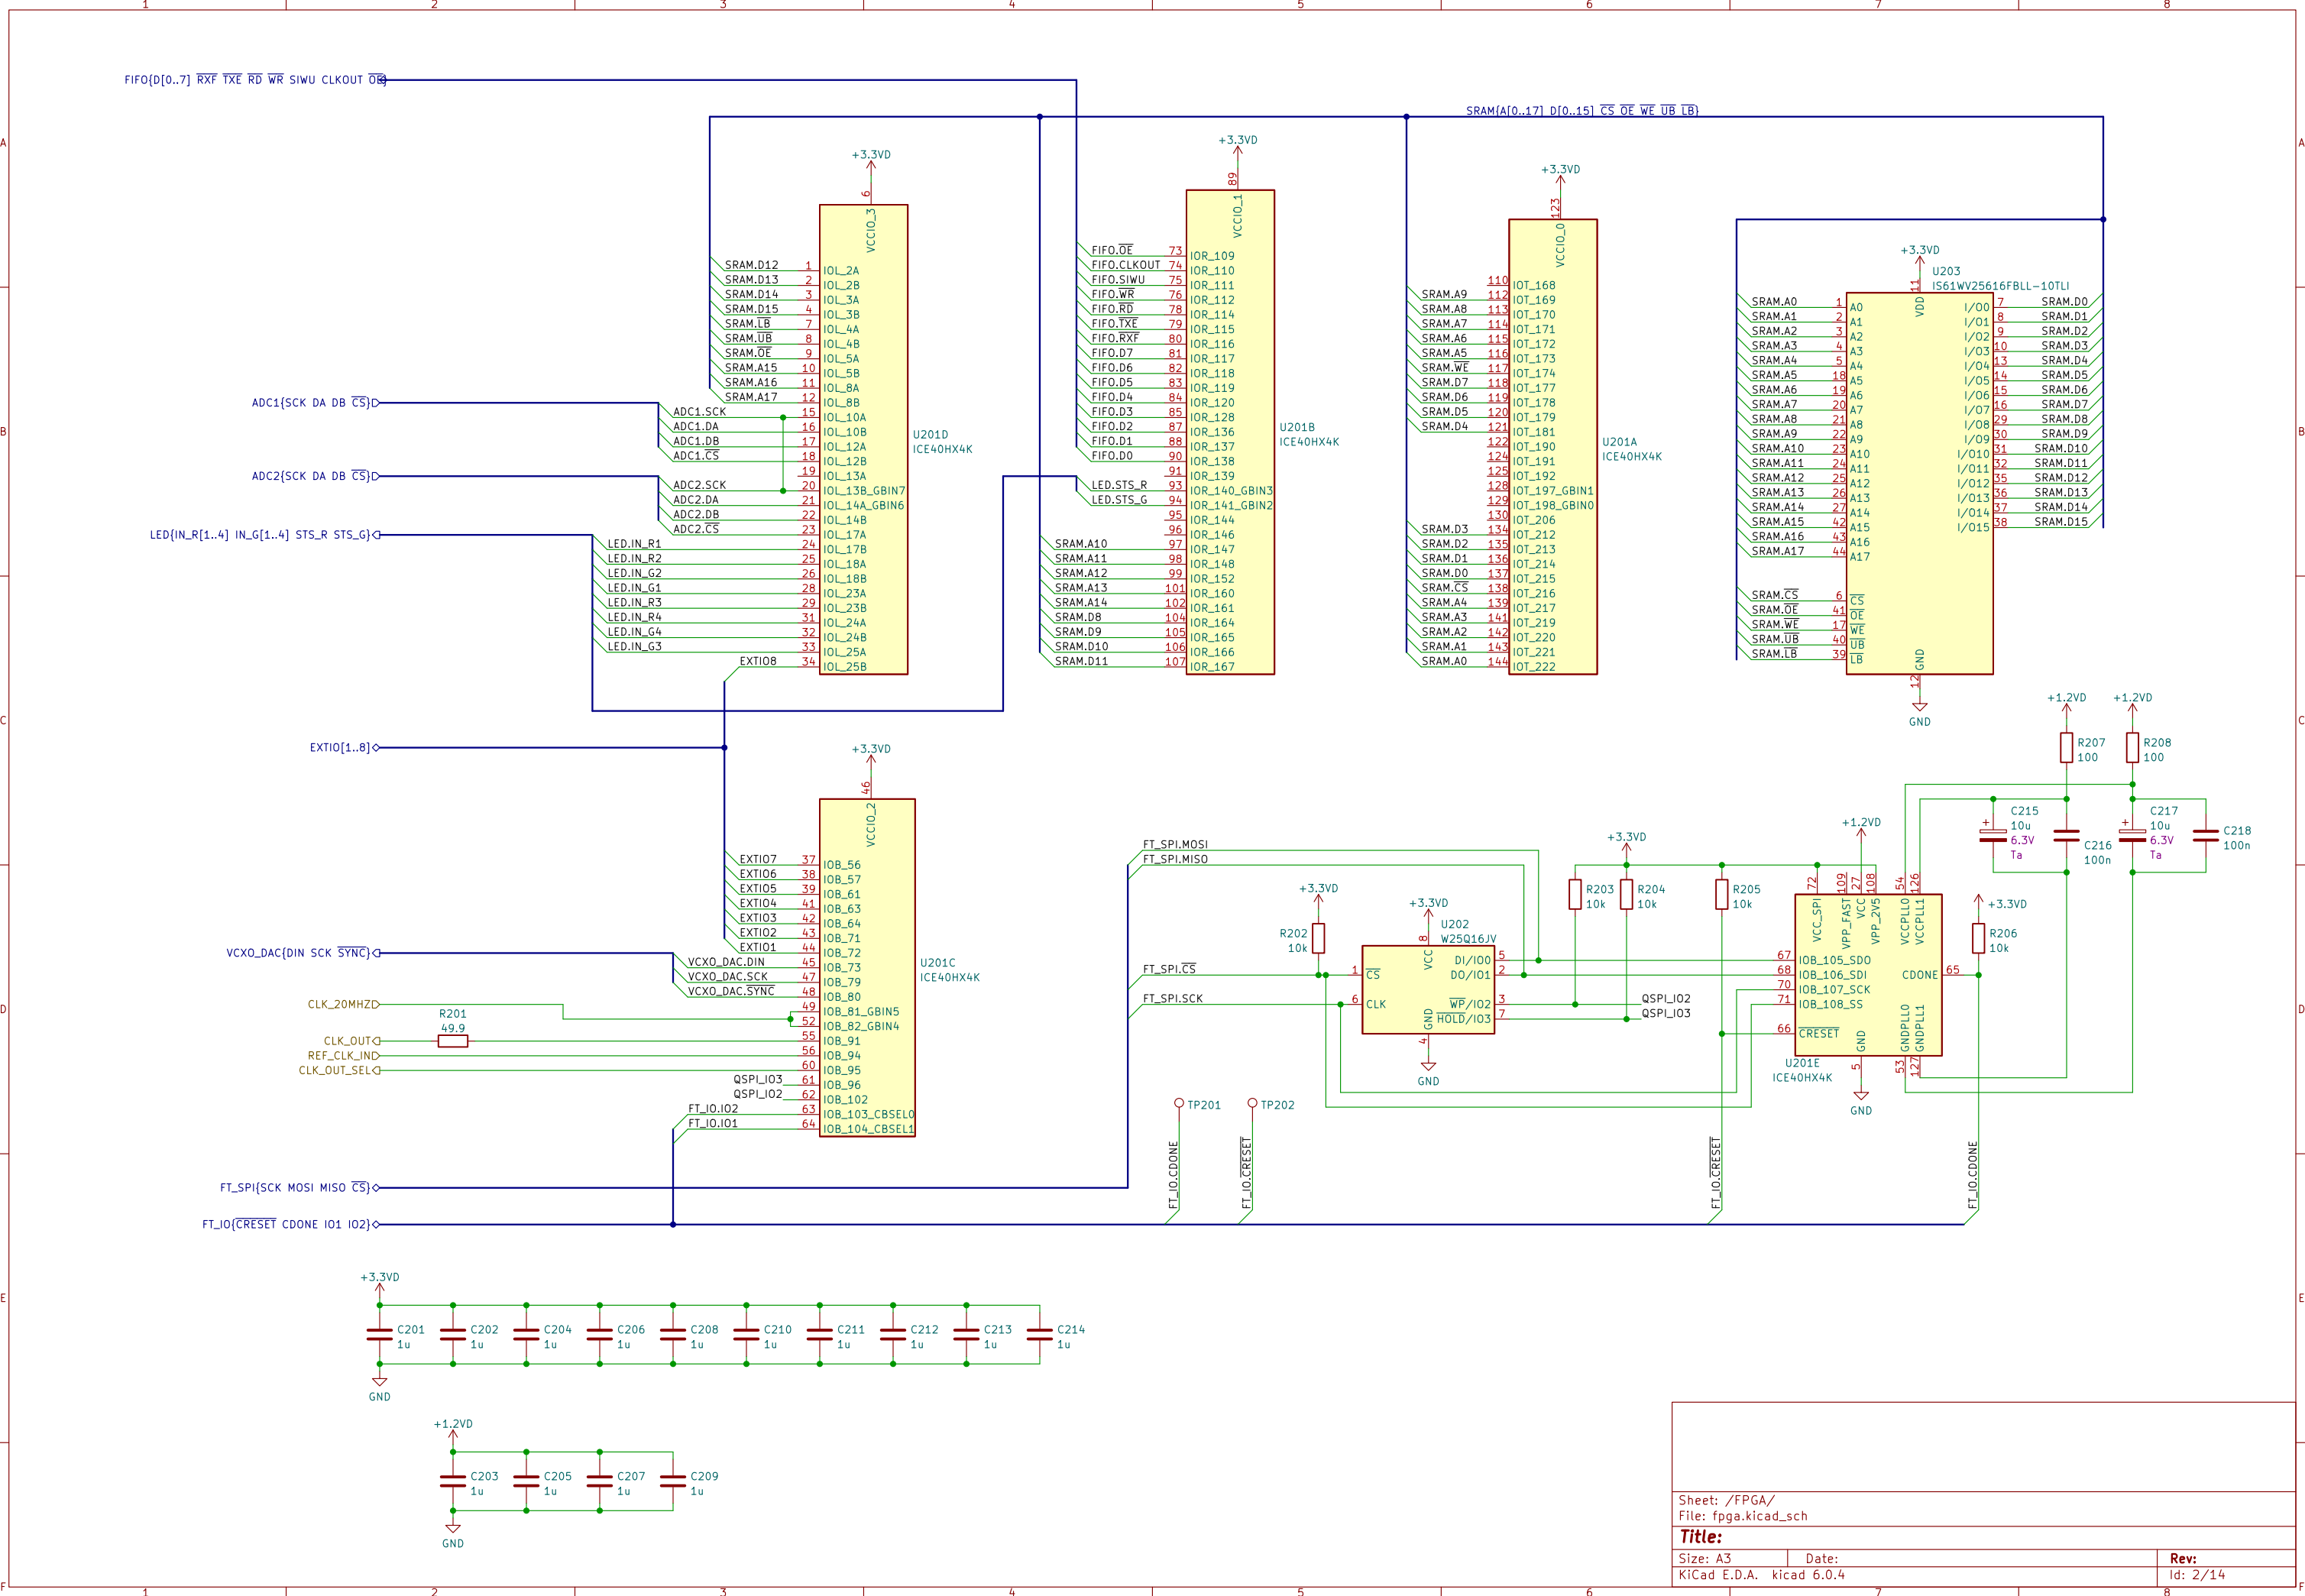

Id: 3/14

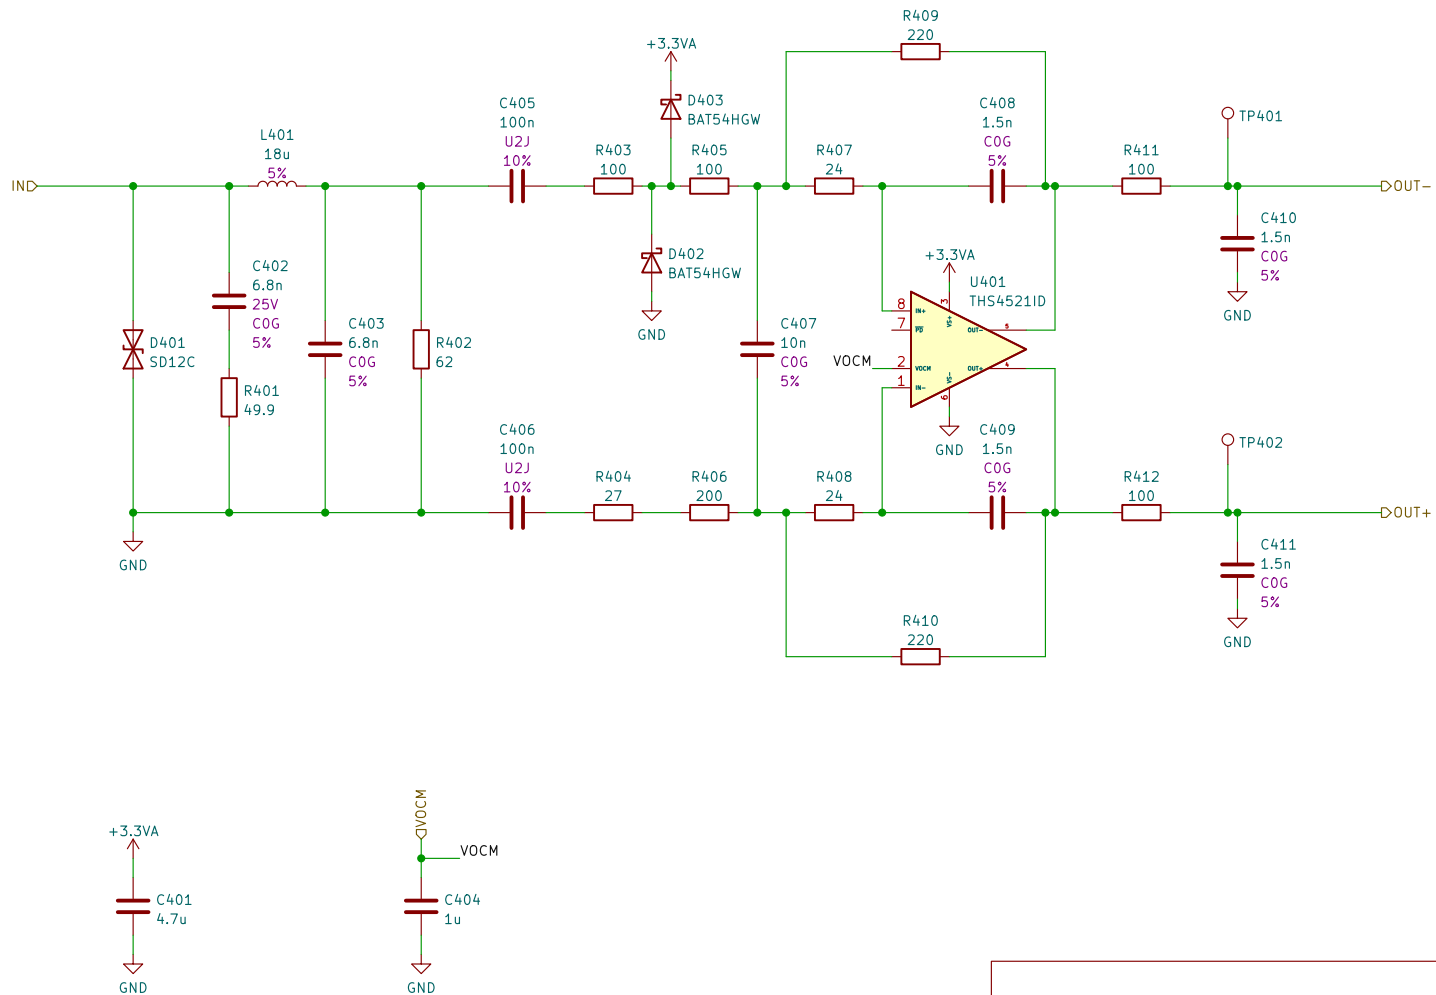

Sheet: /Input Amplifier 2/
File: analog_input_amp.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. kicad 6.0.4

Rev:

Id: 4/14

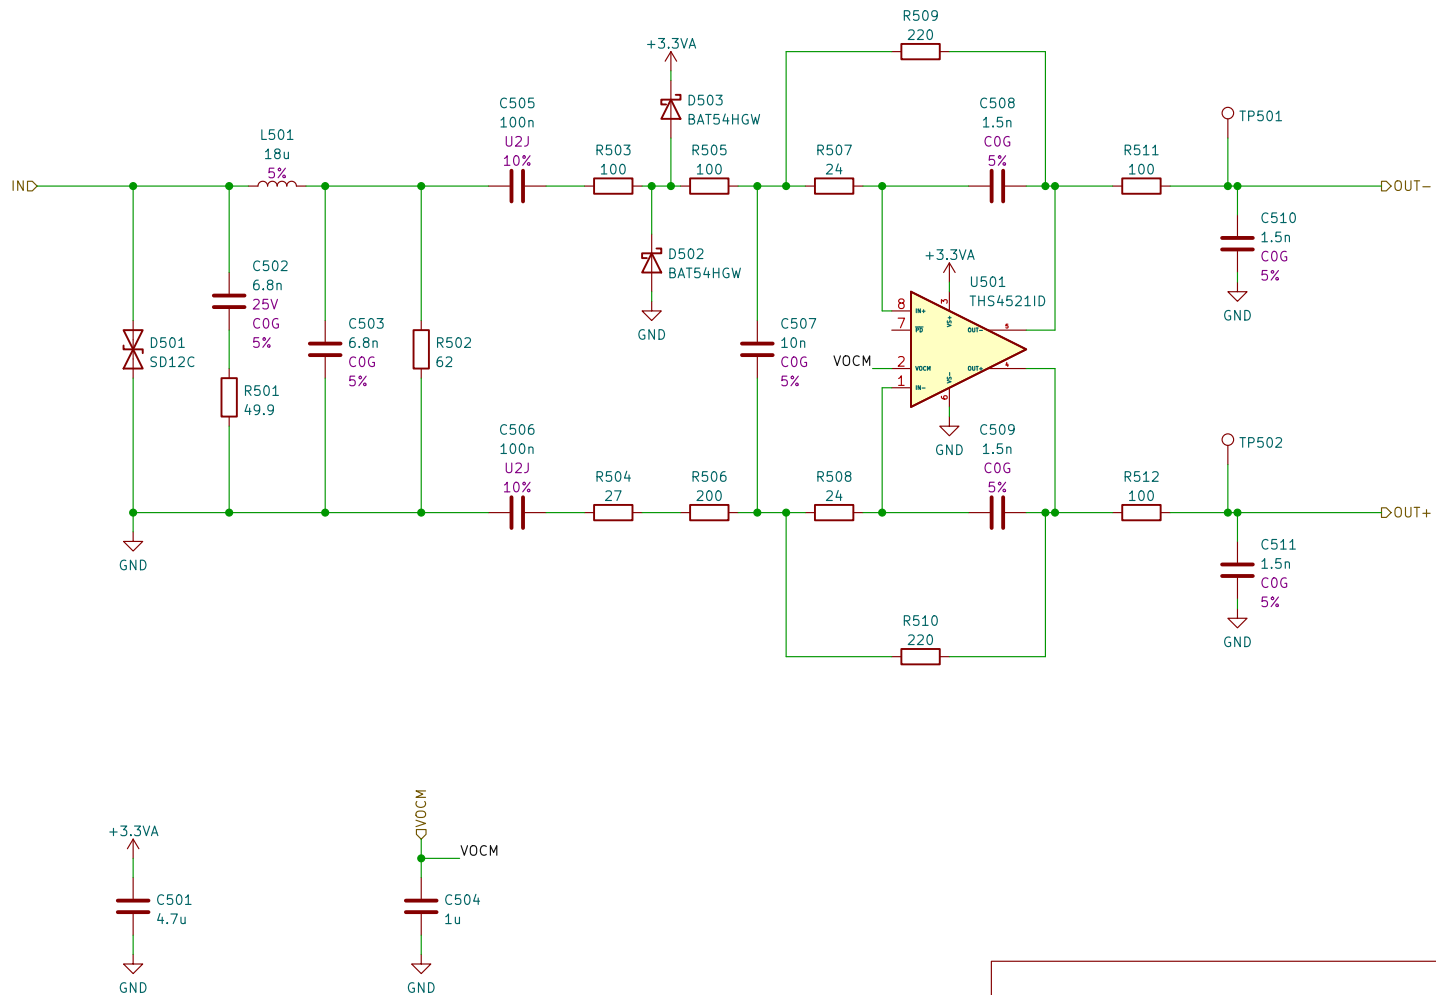

Sheet: /Input Amplifier 3/
File: analog_input_amp.kicad_sch

Title:


Size: A4

Date:

KiCad E.D.A. kicad 6.0.4

Rev:

Id: 5/14

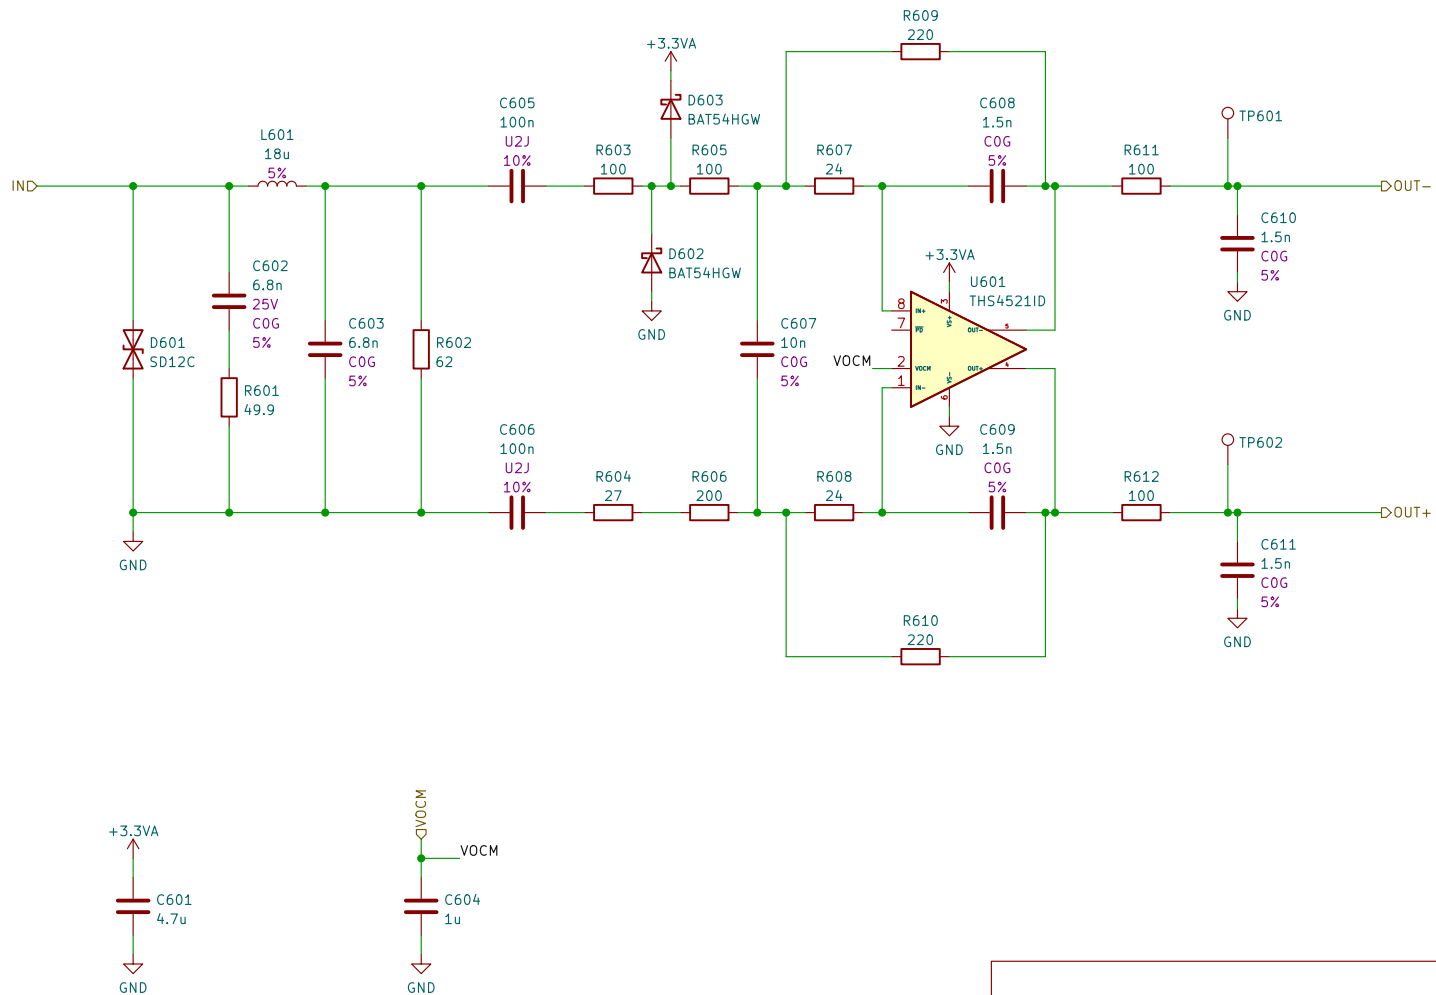

Sheet: /Input Amplifier 4/
File: analog_input_amp.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. kicad 6.0.4

Rev:

Id: 6/14

