


## P2 Relay V23079

- Standard telecom relay (ringing and test access)
- Slim line 15x7.5mm (.590x.295")
- Max. switching current 5A
- 2 form C bifurcated contacts (2 changeover contacts, 2 CO)
- Immersion cleanable
- High sensitivity for low power consumption 140mW/ 70mW

### Typical applications

Communications equipment linecard application (ringing and test access), PABX, voice over IP, office equipment, measurement and control equipment, automotive equipment as CAN bus, keyless entry, speaker switch, medical equipment, consumer electronics, set top boxes, HiFi

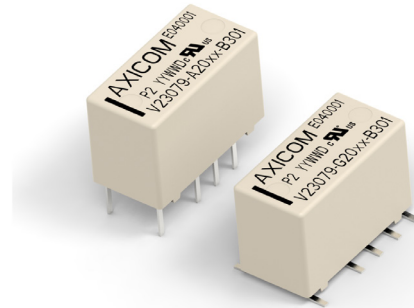

### Approvals


UL61810-1 (former UL508) No. 214025

Technical data of approved types on request

### Contact Data

Contact arrangement	2 form C (CO)
Max. switching voltage	220VDC, 250VAC
Rated current	2A
Limiting continuous current, 85°C	2A
Switching Power	60W, 62.5VA
Contact material	AgNi, gold-covered
Contact style	bifurcated contact
Minimum switching voltage	100µV
Thermoelectrical potential	<10µV
Initial contact resistance	<50mΩ at 10mA, 20mV
Frequency of operation, without load	50 operations/s
Operate time	typ. 2ms, max. 4ms
Set/reset time	typ. 2ms, max. 4ms
Release time	
without diode in parallel	typ. 2ms, max. 4ms
with diode in parallel	typ. 4ms, max. 6ms
Bounce time	typ. 1ms, max. 3ms
Electrical endurance	
at 12V / 10mA	typ. 5x10 <sup>7</sup> operations
at 6V / 100mA	typ. 1x10 <sup>7</sup> operations
at 60V / 500mA	typ. 5x10 <sup>5</sup> operations
at 30V / 1000mA	typ. 1x10 <sup>6</sup> operations
at 30V / 2000mA	typ. 2x10 <sup>5</sup> operations
at 12V / 5000mA / 25°C	typ. 1x10 <sup>5</sup> operations
Contact ratings, UL	110VDC / 0.3A - 33W 30VDC / 2.0A - 60W 120VAC / 0.5A - 60VA 240VAC / 0.25A - 60VA 125VAC / 1A NO Side 125VDC / 0.5A NO Side
Mechanical endurance	typ. 10x10 <sup>6</sup> operations

### Coil Data

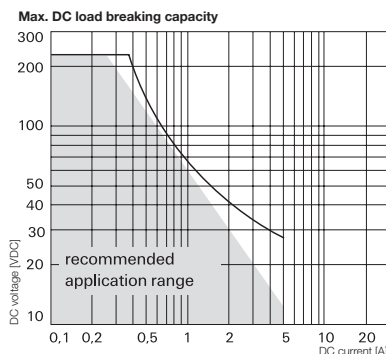

Magnetic system	polarized
Coil voltage range	2 to 24VDC
Max. coil temperature	105°C
Thermal resistance	< 125K/W


### Coil versions, monostable

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
008	3.00	2.25	6.50	0.30	64	140
016	4.00	3.00	8.70	0.40	114	140
011	4.50	3.38	9.80	0.45	145	140
001	5.00	3.75	10.90	0.50	178	140
002	6.00	4.50	13.00	0.60	257	140
006	9.00	6.75	19.60	0.90	578	140
003	12.00	9.00	26.15	1.20	1029	140
005*	24.00	18.00	52.30	2.40	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

\* Available only in standard coil configurations

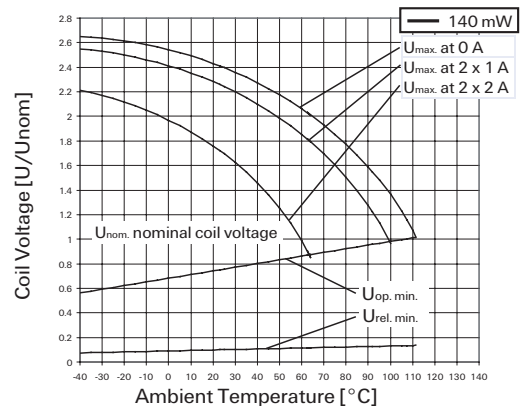

**P2 Relay V23079** (Continued)

**Coil Data** (continued)

**Coil versions, bistable**

Coil code	Rated voltage VDC	Set voltage VDC	Limiting Voltage VDC	Reset voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
<b>Bistable, 1 coil</b>						
108	3.00	2.25	9.2	-2.25	128	70
111	4.50	3.38	13.85	-3.38	289	70
101	5.00	3.75	15.33	-3.75	357	70
102	6.00	4.50	18.5	-4.50	514	70
106	9.00	6.75	27.75	-6.75	1157	70
103	12.00	9.00	37	-9.00	2057	70
105*	24.00	18.00	74	-18.00	8228	70


**Bistable, 2 coil**

219	2.00	1.50	4.33	1.50	28	140
218	2.40	1.80	5.2	1.80	41	140
208	3.00	2.25	6.5	2.25	64	140
211	4.50	3.38	9.8	3.38	145	140
201	5.00	3.75	10.9	3.75	178	140
202	6.00	4.50	13	4.50	257	140
206	9.00	6.75	19.6	6.75	578	140
203	12.00	9.00	26.15	9.00	1029	140
205*	24.00	18.00	52.3	18.00	4114	140

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

\* Available only in standard coil configurations

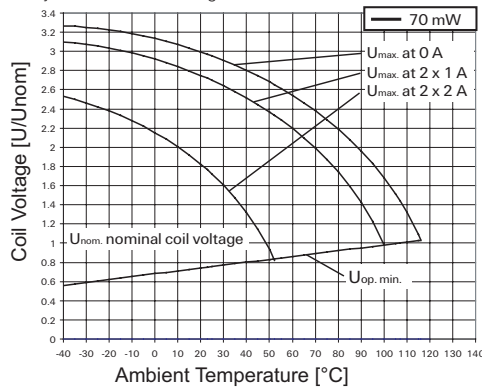


**Coil versions, high dielectric version, monostable, overmolded**

Coil code	Rated voltage VDC	Operate voltage VDC	Limiting Voltage VDC	Release Voltage VDC	Coil resistance $\Omega \pm 10\%$	Rated coil power mW
008	3.00	2.25	6.1	0.30	45	200
001	5.00	3.75	10.1	0.50	125	200
002	6.00	4.50	12.1	0.60	180	200
006	9.00	6.75	18.2	0.90	405	200
003	12.00	9.00	24.2	1.20	720	200

All figures are given for coil without pre-energization, at ambient temperature +23°C.

Other coil voltages on request.

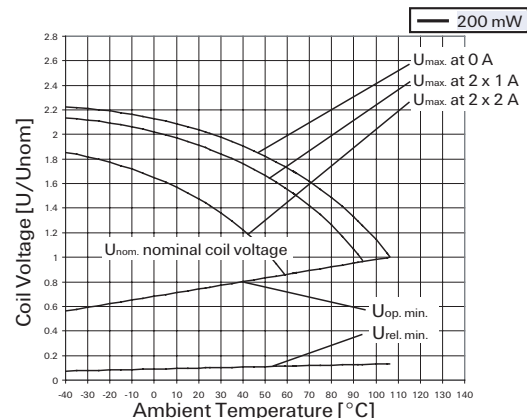

**Insulation Data**

	Standard	HDV
Initial dielectric strength		
between open contacts	1000V <sub>rms</sub>	1500V <sub>rms</sub>
between contact and coil	1500V <sub>rms</sub>	1500V <sub>rms</sub>
between adjacent contacts	1000 V <sub>rms</sub>	1500V <sub>rms</sub>
Initial surge withstand voltage		
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
between open contacts	2000V	2500V
between contact and coil	2500V	2500V
between adjacent contacts	2500V	2500V
Initial insulation resistance at 500 Vdc	> 10 <sup>9</sup> Ω	
Capacitance		
between open contacts		max. 1pF
between contact and coil		max. 2pF
between adjacent contacts		max. 1.5pF
Clearance /creepage	1.3/2.5mm	

**Other Data**

Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at [www.te.com/customer-support/rohssupportcenter](http://www.te.com/customer-support/rohssupportcenter)


Ambient temperature	-40 to +85°C
Category of environmental protection	
IEC 61810	RT III - wash tight
Vibration resistance (functional)	35g, 10 to 1000Hz
Shock resistance (functional)	
IEC 60068-2-27 (half sine)	100g
Terminal type	PCB-THT, SMT long and short terminals
Weight	max. 2.8 g
Resistance to soldering heat THT	
IEC 60068-2-20	265°C/10s
Moisture sensitive level, JEDEC J-Std-020E	MSL3
Related to SMT relays and THT relays packed in reel	
Ultrasonic cleaning	not recommended
Packaging/unit	
THT	tubes/2000 pcs.
THT	reel/1500 pcs.
SMT	reel/2000 pcs. or 2500 pcs.

## P2 Relay V23079 (Continued)

### Terminal assignment


TOP view on component side of PCB

Monostable version




ECR0912-C

Bistable version, 1-coil



ECR0912-C

Bistable version, 2-coils




ECR0913-K

Contacts are shown in reset condition.  
Both coils can be used as either set or reset coils.  
Contact position might change during transportation and must be reset before use.

### PCB layout


TOP view on component side of PCB

THT version

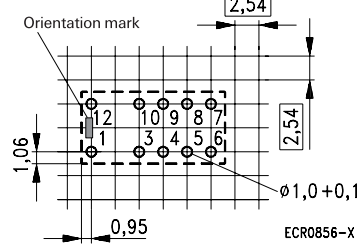


ECR0856-X

SMT, long terminals



P2 SMT L Layout


SMT, short terminals




### Dimensions

Standard coil


THT version



SMT, long terminals

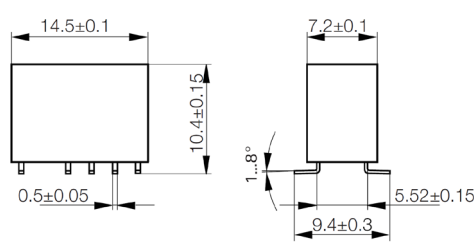


SMT, short terminals

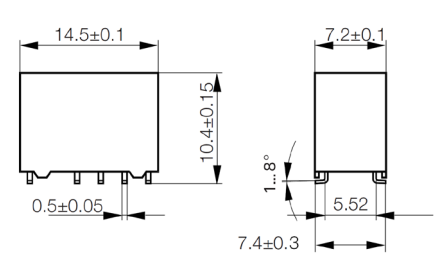


Overmolded coil, high dielectric version


THT version



SMT, long terminals

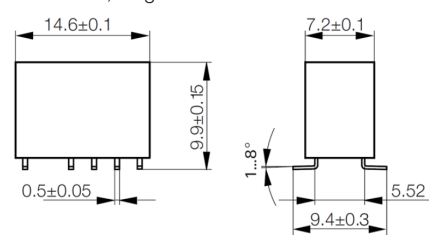


SMT, short terminals

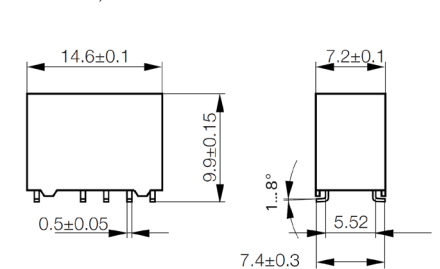




### P2 Relay V23079 (Continued)


### SMT - LONG TERMINALS, OVERMOLDED COIL

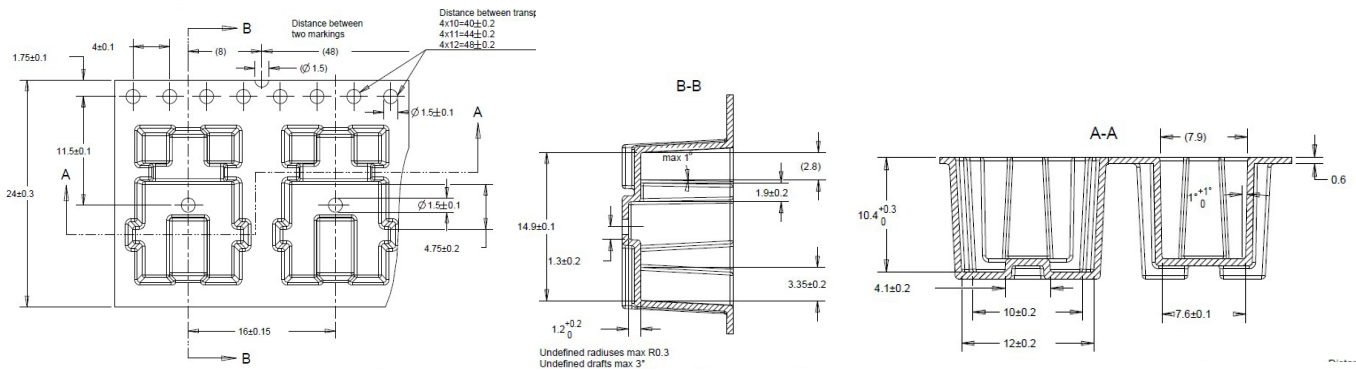


**SMT - LONG TERMINALS, STANDARD COIL**

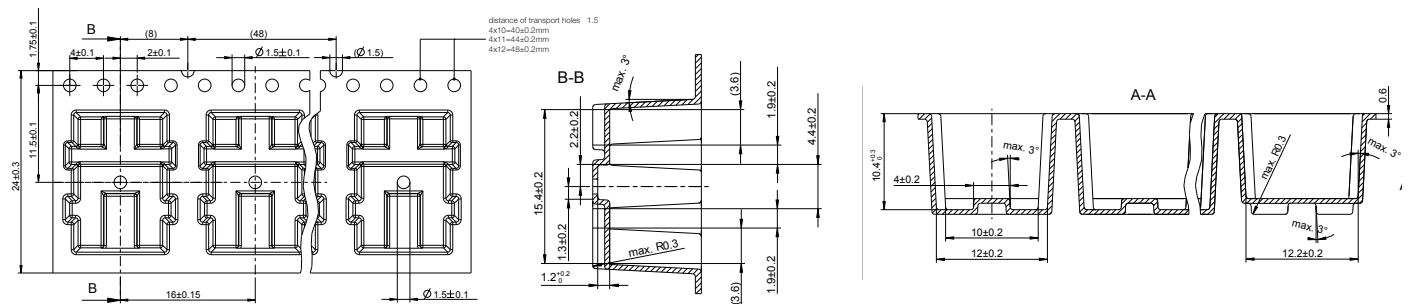

## SMT - SHORT TERMINALS

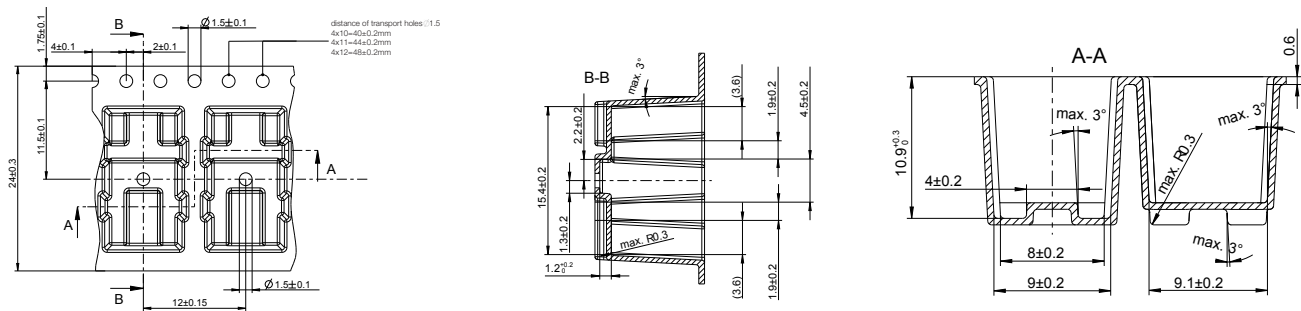

## THT - REEL

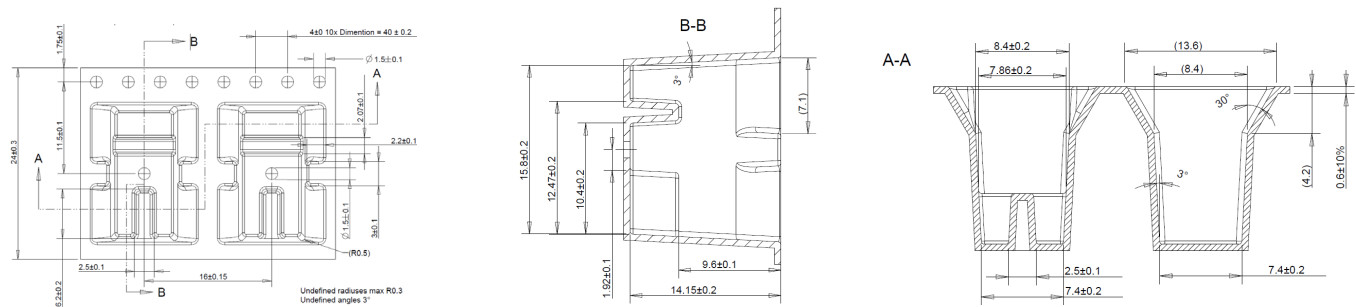

## P2 Relay V23079 (Continued)

### Product code structure

Typical product code **V23079 A 1 001 B 301**

#### Type

**V23079** Signal Relay P2 Series

#### Version

<b>A</b> THT, monostable	<b>D</b> SMT, monostable, long term.	<b>G</b> SMT, monostable, short term.
<b>B</b> THT, latching, 2 coils	<b>E</b> SMT, latching, 2 coils long term.	<b>H</b> SMT, latching, 2 coils short term.
<b>C</b> THT, latching, 1 coil	<b>F</b> SMT, latching, 1 coil long term.	<b>J</b> SMT, latching, 1 coil short term.

#### Coil design

<b>1</b> Standard coil (not for high dielectric version) or Overmolded coil
<b>2</b> Overmolded coil

#### Coil

Coil code: please refer to coil versions table

#### Version

<b>B</b> Standard version
<b>X</b> Special version (High dielectric, THT packed in reel)

#### Contacts for standard versions

**301** 2 form C contacts (2 CO), AgNi +Au

#### Contacts for dielectric versions

**07\*** 2 form C contacts (2 CO), AgNi +Au

#### Packing

**X1\*\*** THT version packed in reel

\* any digit

Product code	Version	Coil design	Coil type	Coil voltage	Part number
V23079-A1001-B301	THT	Standard	Monostable	5VDC	1393788-3
V23079-A1006-B301				9VDC	2-1393788-0
V23079-A1005-B301				24VDC	1-1393788-6
V23079-A1008-B301				3VDC	2-1393788-2
V23079-A2008-B301		Overmolded		3VDC	6-1419120-6
V23079-A2011-B301				4.5VDC	3-1393789-9
V23079-A2001-B301				5VDC	3-1393789-5
V23079-A2002-B301				6VDC	3-1393789-6
V23079-A2006-B301				9VDC	3-1393789-8
V23079-A2003-B301				12VDC	3-1393789-7
V23079-B1218-B301		Standard	Bistable, 2 coils	2.4VDC	1422002-8
V23079-B1208-B301				3VDC	4-1393788-1
V23079-B1211-B301				4.5VDC	4-1393788-2
V23079-B1201-B301				5VDC	3-1393788-3
V23079-B1202-B301				6VDC	3-1393788-5
V23079-B1206-B301				9VDC	3-1393788-9
V23079-B1203-B301				12VDC	3-1393788-6
V23079-B1205-B301				24VDC	3-1393788-7
V23079-B2219-B301		Overmolded		2VDC	1-1422002-2
V23079-B2218-B301				2.4VDC	1-1422002-1
V23079-B2208-B301				3VDC	1-1422002-0
V23079-B2201-B301				5VDC	1422002-9
V23079-C1108-B301		Standard	Bistable, 1 coils	3VDC	5-1393788-3
V23079-C1111-B301				4.5VDC	5-1393788-4
V23079-C1101-B301				5VDC	4-1393788-5
V23079-C1102-B301				6VDC	4-1393788-7
V23079-C1106-B301				9VDC	5-1393788-1

**P2 Relay V23079** (Continued)

Product code	Version	Coil design	Coil type	Coil voltage	Part number	
V23079-D1001-B301	SMT, long pins	Standard	Monostable	5VDC	5-1393788-5	
V23079-D1003-B301				12VDC	5-1393788-7	
V23079-D1006-B301				9VDC	5-1393788-9	
V23079-D1005-B301				24VDC	5-1393788-8	
V23079-D1008-B301		Overmolded		3VDC	6-1393788-1	
V23079-D1011-B301				4.5VDC	6-1393788-2	
V23079-D2008-B301				3VDC	4-1393789-7	
V23079-D2011-B301				4.5VDC	4-1393789-8	
V23079-D2001-B301				5VDC	4-1393789-3	
V23079-D2002-B301				6VDC	4-1393789-4	
V23079-D2006-B301	Standard	Bistable, 2 coils	9VDC	4-1393789-6		
V23079-D2003-B301			12VDC	4-1393789-5		
V23079-E1219-B301			2VDC	1-1422007-0		
V23079-E1218-B301			2.4VDC	1422007-5		
V23079-E1208-B301			3VDC	7-1393788-1		
V23079-E1211-B301			4.5VDC	7-1393788-2		
V23079-E1201-B301			5VDC	6-1393788-8		
V23079-E1202-B301			6VDC	1393789-5		
V23079-E1206-B301			9VDC	1393789-9		
V23079-E1203-B301			Overmolded		12VDC	6-1393788-9
V23079-E1205-B301	24VDC	7-1393788-0				
V23079-E2219-B301	2VDC	1422007-6				
V23079-E2201-B301	5VDC	1422007-7				
V23079-E2206-B301	9VDC	6-1422008-9				
V23079-E2208-B301	3VDC	1422007-8				
V23079-E2218-B301	Standard	Bistable, 1 coil	2.4VDC	1422007-9		
V23079-F1108-B301			3VDC	7-1393788-5		
V23079-F1111-B301			4.5VDC	1-1393789-4		
V23079-F1101-B301			5VDC	7-1393788-3		
V23079-F1102-B301			6VDC	1-1393789-0		
V23079-F1106-B301			9VDC	1-1393789-2		
V23079-F1103-B301			12VDC	7-1393788-4		
V23079-F1105-B301			24VDC	1-1393789-1		
V23079-G1001-B301			SMT, short pins	Monostable	5VDC	7-1393788-6
V23079-G1005-B301					24VDC	7-1393788-8
V23079-G2008-B301	Overmolded			3VDC	5-1393789-4	
V23079-G2016-B301				4VDC	1393790-5	
V23079-G2011-B301				4.5VDC	5-1393789-5	
V23079-G2001-B301				5VDC	4-1393789-9	
V23079-G2002-B301				6VDC	5-1393789-0	
V23079-G2006-B301				9VDC	5-1393789-3	
V23079-G2003-B301	Standard	Bistable, 2 coils		12VDC	5-1393789-1	
V23079-H1208-B301				3VDC	2-1393789-4	
V23079-H1211-B301			4.5VDC	8-1393788-4		
V23079-H1201-B301			5VDC	2-1393789-0		
V23079-H1202-B301			6VDC	2-1393789-1		
V23079-H1206-B301			9VDC	2-1393789-3		
V23079-H1203-B301			12VDC	8-1393788-3		
V23079-H1205-B301		24VDC	2-1393789-2			
V23079-J1108-B301		Bistable, 1 coil		3VDC	2-1393789-9	
V23079-J1111-B301				4.5VDC	3-1393789-0	
V23079-J1101-B301	5VDC			2-1393789-5		
V23079-J1102-B301	6VDC			2-1393789-6		
V23079-J1103-B301	12VDC			2-1393789-7		
V23079-J1105-B301	24VDC			2-1393789-8		
V23079-G2008-X079	SMT, short pins	High dielectric	Monostable	3VDC	1422006-5	
V23079-G2001-X071				5VDC	1422006-1	
V23079-G2002-X072				6VDC	1422006-2	
V23079-G2006-X073				9VDC	1422006-3	
V23079-G2003-X074		Overmolded		12VDC	1422006-4	
V23079-A2003-X074				12VDC	1422025-7	
V23079-A2008-X079				3VDC	1-1422025-1	
V23079-A2008-X101				3VDC	6-1419170-9	
V23079-A2011-X102				4.5VDC	3-1393790-1	
V23079-A2001-X103				5VDC	3-1393790-2	
V23079-A2002-X104	THT		6VDC	3-1393790-3		
V23079-A2006-X105			9VDC	3-1393790-4		
V23079-A2003-X106			12VDC	3-1393790-5		
V23079-B2219-X107			Bistable, 2 coils	2VDC	1-1422003-0	
V23079-B2218-X108				2.4VDC	1-1422003-1	
V23079-B2208-X109				3VDC	1-1422003-2	