


A9F03101

3D view

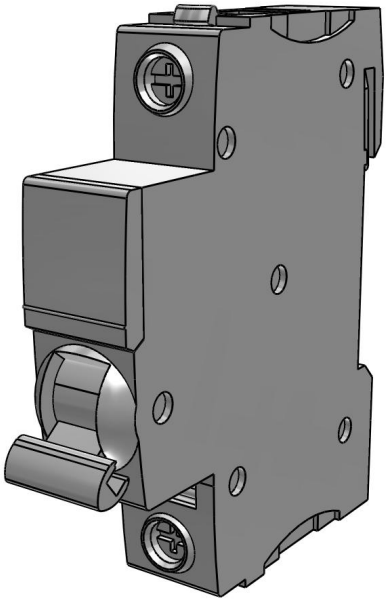

HOW TO ACTIVATE 3D?

To activate the interactive 3D view in Acrobat Reader, you need to select, at the top of the page, **Options** and then **Trust this document**

Zoom

Приближает или отдаляет объекты при вертикальном движении курсора. Инструмент 'рука' также позволяет масштабировать объекты. Зажмите для этого при движении клавишу Shift.

Pan

Перемещает модель только горизонтально или вертикально. Инструмент 'рука' также позволит Вам панорамировать модель. Зажмите для этого при движении клавишу Ctrl.

Вращать

Вращает 3D-объекты относительно экрана. Движение объектов зависит от исходного вида, точки начала движения и направления вращения.

Augmented Reality (AR) - Digital meets real


Augmented Reality, often shortened to AR, is a technology that blends digital information into the real world.
For more information, please click here or directly try yourself by scanning the QR code with your phone.

SCAN ME




A9F03101

2D derivation

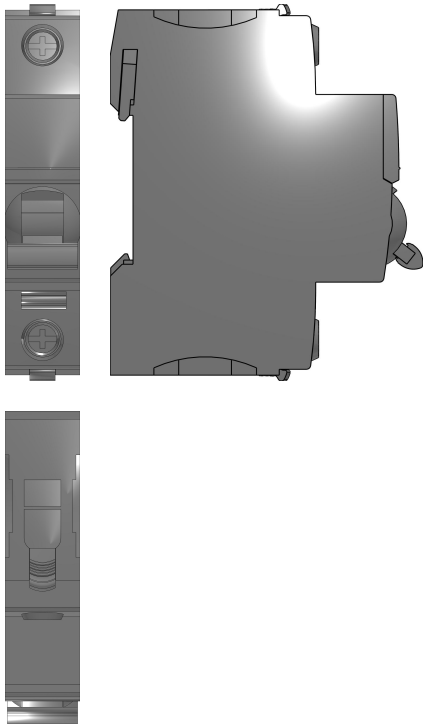

ISO view

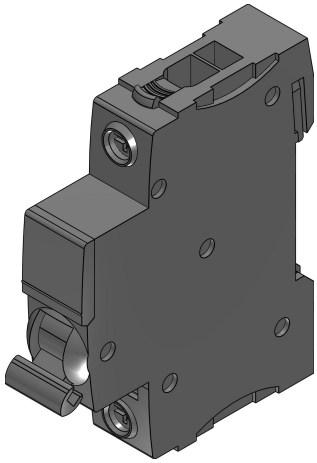

Bill-Of-Materials

N°	Наименование	Количество
1.1		10



A9F03101

Technical drawings



A9F03101


Technical data

PREVIEW ()	pb107401_1500.png
DESCSHORT (Short Description)	Miniature circuit breaker (MCB), Acti9 iC60N, 1P, 1A, B curve, 6000A (IEC 60898-1), 50kA (IEC 60947-2), double term.
INTNO (International product number)	3606480439636
MANUID (Product number of the Manufacturer)	A9F03101
MANUNAME (Manufacturer Name)	Schneider Electric
MANUTYPEDESC (Manufacturer Type Description)	A9F03101
AAD246 (Overvoltage category)	IV
AAD934 (min. frequency / Hz)	50
AAE229 (max. frequency / Hz)	60
AAF726 (rated current / A)	1.000
AAF844 (additional equipment possible)	Yes
AAG268 (concurrently switching N-neutral present)	No
AAG457 (release characteristic)	B
AAG460 (number of protected poles)	1
AAL647 (suitable for flush-mounted installation)	No
AAP798 (Application standards)	IEC 60898-1
AAS574 (Rated current [In] for the power loss specification / A)	1.000
AAS575 (Power loss per pole, current-dependent [PIlp] / W)	2.300
AAT080 (Pole number)	1
AAT082 (Construction size)	1
AAT083 (Width in units of measurement)	2.000
AAT084 (Energy limitation class)	3
AAW366 (Installation depth / mm)	78.500
BAA295 (Degree of soiling)	3
BAB392 (certificate/approval)	CE
BAD915 (Voltage type)	AC
BAG975 (degree of protection)	IP20
BAH005 (rated voltage / V)	230.000
AAO057 (Product type)	A9F03101
AAO663 (GTIN)	3606480439636
AAO742 (Brand)	Schneider Electric
AAU731 (Manufacturer product family)	iC60N
AAU734 (Manufacturer product description)	Miniature circuit breaker (MCB), Acti9 iC60N, 1P, 1A, B curve, 6000A (IEC 60898-1), 50kA (IEC 60947-2), double term.
AAW338 (Manufacturer product designation)	Miniature circuit breaker (MCB), Acti9 iC60N, 1P, 1A, B curve, 6000A (IEC 60898-1), 50kA (IEC 60947-2), double term.
AAO735 (name of supplier)	Schneider Electric
AAZ800 (Customs tariff number)	85362010
NOCUPEROU (Number of content units per order unit)	1

A9F03101

CAD plugins

With our CAD integrations, you can use 3Dfindit directly in your CAD system and make your work easier with additional comfort functions, such as replacing a part and many more.

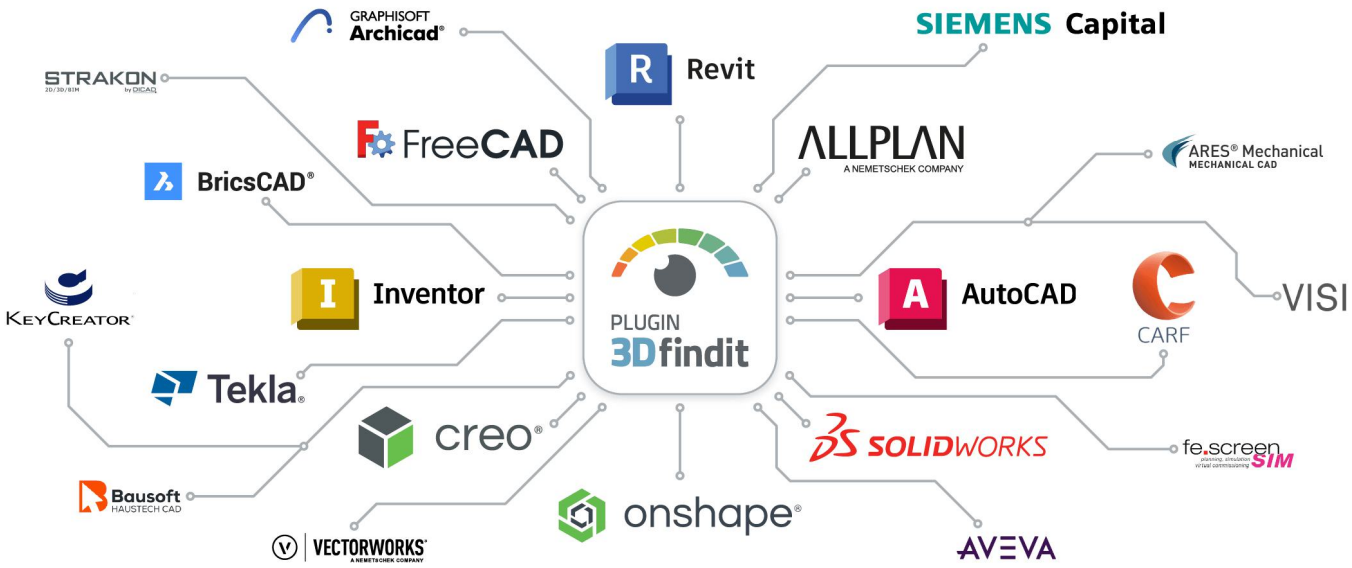

To the plugins