

Manuscript Number: JCOMP-D-13-01486R1

Title: Discontinuous Diffusion Synthetic Acceleration for Sn Transport on 2D Arbitrary Polygonal Meshes

Article Type: Regular Article

Keywords: Diffusion Synthetic Acceleration
discontinuous finite element method
interior penalty method.
Sn transport equation
piece-wise linear discontinuous finite element

Corresponding Author: Dr. Jean C Ragusa, PhD

Corresponding Author's Institution: Texas A&M University

First Author: Bruno Turcksin, PhD

Order of Authors: Bruno Turcksin, PhD; Jean C Ragusa, PhD

Abstract: In this paper, a Diffusion Synthetic Acceleration (DSA) technique applied to the Sn radiation transport equation is developed using Piece-Wise Linear Discontinuous (PWLD) finite elements on arbitrary polygonal grids.

The discretization of the DSA equations employs an Interior Penalty technique, as is classically done for the stabilization of the diffusion equation using discontinuous finite element approximations. The penalty method yields a system of linear equations that is Symmetric Positive Definite (SPD). Thus, solution techniques such as Preconditioned Conjugate Gradient (PCG) can be effectively employed. Algebraic MultiGrid (AMG) and Symmetric Gauss-Seidel (SGS) are employed as conjugate gradient preconditioners for the DSA system. AMG is shown to be significantly more efficient than SGS.

Fourier analyses are carried out and we show that this discontinuous finite element DSA scheme is always stable and effective at reducing the spectral radius for iterative transport solves, even for grids with high-aspect ratio cells. Numerical results are presented for different grid types: quadrilateral, hexagonal, and polygonal grids as well as grids with local mesh adaptivity.

Dr. Jean Ragusa
Nuclear Engineering Dept.
Texas A&M University
College Station, TX

May 21, 2014

Professor William Martin, Editor,
Journal of Computational Physics,
Re: Ref. No. JCOMP-D-13-01486

Dear Dr. Martin,

Attached please find a revised version of our manuscript entitled “Discontinuous Diffusion Synthetic Acceleration for Sn Transport on 2D Arbitrary Polygonal Meshes” by B. Turcksin and J. C. Ragusa, for publication in the Journal of Computational Physics. We appreciate the comments of the reviewers as we believe they have allowed us to improve the paper.

We have attached a file of detailed responses for Reviewer #1. No reply was required for Reviewer #2. We believe that we have adequately addressed all of their questions and hope that our paper will be found suitable for publication.

We remain available for any further questions, should there be any.

Best regards,

Bruno Turcksin and Jean Ragusa

Answers to Reviewer #1

Ms. Ref. No. JCOMP-D-13-01486

Title: Discontinuous Diffusion Synthetic Acceleration for Sn Transport on 2D Arbitrary Polygonal Meshes

Journal of Computational Physics,

Combination of MIP, PWLG and AMG is interesting and could have good applications for radiation transport. The contents are sufficiently novel and interesting to warrant publication. The manuscript is well-written. The authors gave appropriate references to the previous works.

Thank you.

However, I want the authors address the following issues before a publication:

1. The statement that 'polygonal grids allow for a reduced numbers of unknowns' is not complete. It is meaningful only in the condition of not sacrificing the accuracy. The authors need to provide numerical supports or give up the statement completely. The first part in the third paragraph of Introduction is superficial in this sense.

We agree. We had this "information" first-hand from Marv Adams and asked him about a Reference to back-up this statement. It turns out we have no numerical results to support this conjecture so far. The testbed code we developed for this paper does not implement LD on triangles nor can handle a mix of LD and BLD discretized cells, both of which would be required to compare against polygonal grids solved with PWLD. Thus, we have followed your suggestion to give up the statement completely but will keep in mind that this study needs to be carried out.

2. The authors indeed provided several different grid types but few important types are missing in my opinion: a) a polygon with number of vertices greater than 4 with bad aspect ratios (Section 5.2.4 is only quadrilateral!). The assumption that 'the polygonal cells do not deviate significantly from regular polygons' on Line 157 weakens the conclusion 'effective for cells with high-aspect ratios'. It seems to me the same h perpendicular for all sides for a distorted polygon is not good; b) a degenerated polygons with more than one hanging node from AMR. The authors imply the solver works with arbitrary shapes of polygons, but I think there ought to be constraints on the grid. For example, any polygonal cell in the grid has to be convex.

We added a test case with large aspect ratio cell for a mesh consisting of degenerated polygons (rectangle-shaped cells with up to 23 vertices treated as a "23-gon" – a polygon with 23 sides). That grid also has many hanging nodes.

We were limited to convex cells because our transport sweep algorithm did not allow for cycles in the graph of the sweep. We added Reference 32 where

PWLD was employed to carry out S_n transport sweeps for non-convex polygonal cells.

3. The authors need to carefully examine the control parameters they used for AMG, like the upper bound of the two-grid condition number (line 228), and etc., so that the readers can have a better understanding on the performances of different AMG packages.

The AMG algorithms (Trilinos ML and AGMG) were used with their default options. Unless stated otherwise, ML is used with all the parameters set to the values corresponding to the “SA” (smoothed aggregation) options. The ML manual recommends “SA” for symmetric positive definite systems. AGMG is used with default parameters.

4. Missing results of CPU-times and memory usages especially memory consumed by the AMG packages.

We have added CPU times for each test cases. The times are split into: Preconditioner setup (if any), MIP-DSA solve, and Total time. We have added memory usage for the AGMG package (this information was not available in Trilinos).

Some minor problems or typos are listed:

1. GMRes equations are given and mentioned in Introduction but numerical results are not presented;
2. MIP appeared in Abstract is not defined;
3. Line 67 an incomplete sentence;
4. Add 'with spatial discretization' after 'Equation (1)' above Eq. (3);
5. Line 81, L is the streaming plus collision operator;
6. Check the grammar on Line 177;
7. Line 192-194, what is the different between n gamma and gamma?
8. Line 205-206, what is the subscript k ?
9. To my knowledge, Gauss-Legendre-Chebyshev is a production quadrature, then why is there only one parameter S_n ?
10. In the results section, what quantity those iteration tolerances are applied on?
11. Line 295, remove extra 'of';
12. Line 298, typo PGC should be PCG;
13. Line 340-341, what is the 'additional elementary matrices'?
14. Line 343, remove extra 'for'.

1. Added a table for GMRes results with polygonal cells.
2. Corrected.
3. Corrected.
4. Added.
5. Corrected.

6. Corrected.
7. They both should be n_γ , corrected.
8. Corrected.
9. It is the triangular GLC quadrature. We have added reference to it (Ref. 30).
10. Corrected.
11. Corrected.
12. Corrected.
13. Added a paragraph at the end of Section 3 so that the statement in the conclusion is clearer.
14. We did not find an extra 'for'.

Thank you for pointing these out.

Discontinuous Diffusion Synthetic Acceleration for S_n Transport on 2D Arbitrary Polygonal Meshes

Bruno Turcksin^{a,*}, Jean C. Ragusa^{a,**}

^a*Department of Nuclear Engineering, Texas A&M University College Station, TX 77843, USA*

Abstract

In this paper, a Diffusion Synthetic Acceleration (DSA) technique applied to the S_n radiation transport equation is developed using Piece-Wise Linear Discontinuous (PWLD) finite elements on arbitrary polygonal grids. The discretization of the DSA equations employs an Interior Penalty technique, as is classically done for the stabilization of the diffusion equation using discontinuous finite element approximations. The penalty method yields a system of linear equations that is Symmetric Positive Definite (SPD). Thus, solution techniques such as Preconditioned Conjugate Gradient (PCG) can be effectively employed. Algebraic MultiGrid (AMG) and Symmetric Gauss-Seidel (SGS) are employed as conjugate gradient preconditioners for the DSA system. AMG is shown to be significantly more efficient than SGS. Fourier analyses are carried out and we show that this discontinuous finite element DSA scheme is always stable and effective at reducing the spectral radius for iterative transport solves, even for grids with high-aspect ratio cells. Numerical results are presented for different grid types: quadrilateral, hexagonal, and polygonal grids as well as grids with local mesh adaptivity.

Keywords: Diffusion Synthetic Acceleration, discontinuous finite element method, interior penalty method, S_n transport equation, piece-wise linear finite element .

1. Introduction

In this paper, we present a Diffusion Synthetic Acceleration (DSA) scheme that employs the same discontinuous finite element discretization used in the S_n transport equations. Specifically, we employ for both the transport solve and the diffusion acceleration Piece-Wise Linear Discontinuous (PWLD) finite elements and test the scheme on arbitrary polygonal cells.

Arbitrary polygonal (polyhedral in 3D) cells provide a natural transition for locally adapted meshes, may arise, for instance, when arbitrary cut lines are used to split an existing mesh, and are now more frequently found, e.g., in fluid simulations (e.g., StarCCM+ [1]).

Because analytical solutions are unavailable for most radiation transport problems of practical interest, one typically employs iterative techniques to solve the large system of equations that results from the spatial

*Current address: Department of Mathematics, Texas A&M University College Station, TX 77843, USA

**Corresponding author

Email addresses: `bruno.turcksin@math.tamu.edu` (Bruno Turcksin), `jean.ragusa@tamu.edu` (Jean C. Ragusa)

and angular discretizations of the transport equation. Standard iterative techniques for the first-order form of the discrete-ordinate (S_n) transport equation include Source Iteration (SI) and Krylov subspace techniques (usually GMRes [2]). For highly diffusive materials (i.e., with scattering ratios $c = \Sigma_s/\Sigma_t$ close to 1) and optically thick configurations (i.e., problems that are not leakage-dominated), these iterative techniques can become quite ineffective, requiring high iteration counts and possibly leading to false convergence. To mitigate these issues, SI and GMRes-based transport solves can be effectively accelerated (preconditioned) using Diffusion Synthetic Acceleration (DSA) [3, 4, 5, 6, 7, 8].

The spatial discretization of the DSA equations must be somewhat “consistent” with the one used for the S_n transport equations in order to yield unconditionally stable and efficient DSA schemes [3, 4, 5, 6, 7, 8]. However, the search for full consistency between the discretized transport equations and the discretized diffusion may not be computationally practical (especially for unstructured arbitrary meshes, [3]). For instance, Warsa, Wareing, and Morel [5] derived a fully consistent DSA scheme for linear discontinuous finite elements on unstructured tetrahedral meshes; their DSA scheme yields a P_1 system of equations that is computationally more expensive than partially consistent DSA schemes that are based upon discretizations of a standard diffusion equation. Several partially consistent schemes have been analyzed for discontinuous finite element discretizations of the transport equation on unstructured meshes, for example, the modified-four-step (M4S) scheme [6], the Wareing-Larsen-Adams (WLA) scheme [7], and the Modified Interior Penalty (MIP) scheme [8].

To the authors’ knowledge, no work is currently ongoing to adapt the M4S technique to polygonal meshes. This is very likely due to the fact that the M4S scheme does not yield a Symmetric Positive Definite (SPD) matrix and was found to be divergent for 3D tetrahedral meshes with linear discontinuous elements [5]. Recent work to develop a DSA scheme for polygonal cells has mainly focused on adapting the WLA scheme to polygonal meshes [9, 10]. The WLA scheme is a two-stage process, where first a diffusion solution is obtained using a *continuous* finite element discretization and then a *discontinuous* update is performed cell-by-cell in order to provide an appropriate discontinuous scalar flux correction to the discontinuous finite element transport solver. In [5], the WLA scheme was found to be a stable and effective DSA technique, though its efficiency degraded as the problem became optically thick and highly diffusive. In this paper, we extend the MIP technique to the PWLD discretization technique for arbitrary polygonal meshes. The MIP scheme is based on the standard Interior Penalty (IP) method for the discontinuous finite element discretization of diffusion equations. MIP was first derived in [8], where it was applied to triangular unstructured meshes (with

locally adapted cells). MIP does not suffer from the same issues as the WLA technique when the problem becomes optically thick and highly diffusive and, therefore, can be a useful alternate DSA for to accelerate DFE transport solves. In [8], a Preconditioned Conjugate Gradient (PCG) technique (with Symmetric Gauss-Seidel, SGS, as preconditioner) was used to solve the MIP-DSA equation. In this paper, we also analyze the effectiveness of algebraic multigrid methods (AMG) [11, 12] as a preconditioner.

The remainder of this paper is organized as follows. In Section 2, we briefly review the PWLD discontinuous finite element discretization and the iterative solution techniques applied to the S_n transport equation. The MIP-DSA scheme is extended to the PWLD discretization for arbitrary polygons in Section 3. In Section 4, we describe the Algebraic MultiGrid (AMG) approaches used here: the ML package of Trilinos [13] and the AGMG (AGgregation-based algebraic MultiGrid) technique of [14, 15, 16, 17]. In Section 5, we present a Fourier analysis for the MIP-DSA scheme discretized with PWLD, and we compare the different preconditioned CG approaches. Conclusions are given in Section 6.

2. Discretization and Solution Techniques for the S_n Transport Equation

In this Section, we review the S_n transport equation and the iterative solution techniques typically employed to solve it. We then describe the PWLD discontinuous spatial discretization for the transport equation with an emphasis on arbitrary polygonal grids.

2.1. The S_n Transport Equations

Given an angular quadrature set $\{\mathbf{\Omega}_m, w_m\}_{1 \leq m \leq M}$, the one-group S_n transport equation with isotropic source and isotropic scattering is:

$$(\mathbf{\Omega}_m \cdot \nabla + \Sigma_t(\mathbf{r})) \psi_m(\mathbf{r}) = \frac{1}{4\pi} (\Sigma_s(\mathbf{r})\phi(\mathbf{r}) + S(\mathbf{r})), \quad \text{for } \mathbf{r} \in \mathcal{D}, \quad 1 \leq m \leq M, \quad (1)$$

with $\psi_m(\mathbf{r}) = \psi(\mathbf{r}, \mathbf{\Omega}_m)$ the angular flux at position \mathbf{r} in direction $\mathbf{\Omega}_m$, Σ_t and Σ_s the total and scattering cross sections, respectively, and \mathcal{D} the spatial domain. The scalar flux is defined and numerically evaluated as follows:

$$\phi(\mathbf{r}) \equiv \int_{4\pi} \psi(\mathbf{r}, \mathbf{\Omega}) d\mathbf{\Omega} \approx \sum_{m=1}^M w_m \psi_m(\mathbf{r}). \quad (2)$$

For brevity, we assume only incoming boundary conditions, that is, $\psi_m(\mathbf{r}_b) = \psi_m^{inc}(\mathbf{r}_b)$ for any point on the inflow boundary: $\mathbf{r}_b \in \partial\mathcal{D}_m^- = \{\partial\mathcal{D} \text{ such that } \mathbf{\Omega}_m \cdot \mathbf{n}_b < 0\}$, with $\mathbf{n}_b = \mathbf{n}(\mathbf{r}_b)$ the outward unit normal vector

at \mathbf{r}_b . Equation (1) with spatial discretization can be written in a compact form using operators:

$$\mathbf{L}\Psi = \mathbf{M}\Sigma\Phi + S \equiv q, \quad (3)$$

$$\Phi = \mathbf{D}\Psi, \quad (4)$$

where $\Psi = (\psi_1, \dots, \psi_M)^T$ is the vector of angular fluxes, Φ the scalar flux, q is the total (scattering+external) source, \mathbf{L} is the streaming plus collision operator, Σ is the scattering matrix, \mathbf{M} is the moment-to-direction operator, and \mathbf{D} is the direction-to-moment operator. $\mathbf{L} = \text{diag}(\mathbf{L}_1, \dots, \mathbf{L}_m, \dots, \mathbf{L}_M)$ is a block-diagonal operator; given a total source q , one can solve independently for the resulting angular fluxes in all directions. The action of \mathbf{L}^{-1} is often referred to as a transport sweep when discontinuous spatial approximations are employed: for any direction Ω_m , the action of \mathbf{L}_m^{-1} can be obtained by traversing the mesh (i.e., sweeping) in a specific ordering of the cells, thus requiring that a small linear system of equations be solved cell by cell. The order in which the elements are solved constitutes the graph of the sweep; for brevity and since this is not the focus of this article, we do not expand on situations where the graph presents dependencies (cycles). In such a case, these dependencies can either be lagged within the iterative procedure [18] or the solution vector consisting of the scalar flux is augmented by the angular flux unknowns that cause the cycle [8].

2.2. Solution Techniques

Equations (3) and (4) can be solved using the Source Iteration (SI) method (a stationary iterative technique also known as Richardson iteration). The ℓ^{th} iteration of SI is given by :

$$\Phi^{(\ell+1)} = \mathbf{D}\mathbf{L}^{-1} \left(\mathbf{M}\Sigma\Phi^{(\ell)} + S \right). \quad (5)$$

Alternatively, a subspace Krylov method (usually GMRes) can be employed to solve the linear system of equations, recast as follows:

$$(\mathbf{I} - \mathbf{D}\mathbf{L}^{-1}\mathbf{M}\Sigma) \Phi = \mathbf{D}\mathbf{L}^{-1}S. \quad (6)$$

SI and GMRes-based transport solves require transport sweeps (the action of \mathbf{L}^{-1}). When the scattering ratio $c = \frac{\Sigma_s}{\Sigma_t}$ tends to one in optically thick domains, the number of SI and GMRes iterations can become large. To speed up convergence, a DSA preconditioner is needed; this is further discussed in Section 3.

2.3. Discontinuous Finite Element Discretization on Arbitrary Grids

To seek a DFE solution for the angular flux, the domain \mathcal{D} is partitioned into arbitrary polygonal cells. For a given streaming direction $\mathbf{\Omega}_m$, the discontinuous finite element formulation, on a given spatial cell K , is given by:

$$-\int_K (\psi_m \mathbf{\Omega}_m \cdot \nabla b_i + \Sigma_t \Psi_m b_i) d\mathbf{r} + \int_{\partial K^+} \mathbf{\Omega}_m \cdot \mathbf{n} \Psi_m b_i d\mathbf{r} = \int_K q b_i d\mathbf{r} + \int_{\partial K^-} |\mathbf{\Omega}_m \cdot \mathbf{n}| \psi_m^\uparrow b_i d\mathbf{r}, \quad (7)$$

where b_i represents a generic discontinuous finite element basis function, ∂K^- is the inflow face of element K , and ∂K^+ is the outflow face of element K . The angular flux values on an inflow face, denoted by ψ_m^\uparrow in Eq. (7), are taken from the upwind neighbor element of that face.

Next, we define the b_i basis functions for the PWLD discretization. First, we introduce the within-cell point c for any 2D polygonal cell. The coordinates of c are the weighted averages of the polygon's vertices:

$$u_c = \sum_{i=1}^{N_V} \alpha_i u_i, \quad (8)$$

where $u = x$ or y , N_V is the number of vertices for the cell under consideration, and the (positive) weights α_i are such that $\sum_{i=1}^{N_V} \alpha_i = 1$. The basis function at vertex i is defined by (see also [19]):

$$b_i(x, y) = t_i(x, y) + \alpha_i t_c(x, y), \quad (9)$$

where $t_i(x, y)$ is a linear function such that $t_i(x, y)$ is unity at vertex i and zero at vertices $i - 1$, $i + 1$, and c . The $t_c(x, y)$ function is a “tent” function in the interior of the cell; it is unity at the within-cell point c and zero at all of the vertices of the cell. The number of PWLD basis functions is equal to the number of vertices in the polygon (i.e., $1 \leq i \leq N_V$). In this paper, the arbitrary positive weights α_i are chosen to be equal to $\frac{1}{N_V}$. For example, on a quadrilateral cell, we employ $\alpha_i = \frac{1}{4}$. Finally, note that on triangular cells, the PWLD basis functions reduce to the standard Linear Discontinuous (LD) basis functions if one chooses $\alpha_i = \frac{1}{3}$. Given the definition of the PWLD finite elements, it may seem complicated to build the elementary transport matrices on an arbitrary polygonal cell, but the construction of such matrices can be greatly simplified using the notion of “sub-cells”, where a “sub-cell”, in 2D, is defined as the triangular cell linking an edge of the polygonal cell to its within-cell point. Note that these “sub-cells” are never created nor stored as part of the polygonal grid. However, from a code implementation perspective, the computation

of the elementary matrices on a polygonal cell is greatly simplified by looping over its sub-cells.

3. Diffusion Synthetic Acceleration (DSA) on Arbitrary Polygonal Cells

3.1. DSA Solution Principle

As noted earlier, standard iterative techniques applied to transport solves can be slowly converging in thick diffusive configurations. A DSA scheme must be employed to accelerate their convergence. The idea behind synthetic acceleration is that the error between the (yet unknown) transport solution and the current iterate can be estimated from a computationally less expensive process, yielding a corrective term to be added to the current iterate in order to improve the next iterate. In DSA, a corrective scalar flux contribution, $\delta\Phi$, is sought through the following diffusion equation [3],

$$\mathbf{A} \delta\Phi = \Sigma \left(\Phi^{(\ell+1/2)} - \Phi^{(\ell)} \right). \quad (10)$$

where the source term is a scattering term due to the difference between the previous iterate scalar flux $\Phi^{(\ell)}$ and the newest scalar flux, $\Phi^{(\ell+1/2)}$, obtained after a single transport sweep. The next scalar flux iterate is obtained by adding the scalar flux correction to the latest scalar flux, yielding:

$$\Phi^{(\ell+1)} = \Phi^{(\ell+1/2)} + \delta\Phi. \quad (11)$$

\mathbf{A} is the diffusion matrix of the DSA scheme. Ideally, \mathbf{A} should be SPD (such that efficient iterative techniques can be employed in its linear solve) and easy to form (even on arbitrary grids).

3.2. Modified Interior Penalty DSA Scheme for Polygons

Here, we discuss the Modified Interior Penalty (MIP) method for the diffusion equation for arbitrary polygons as a DSA scheme. In its discretization, this DSA scheme employs the same discontinuous finite elements used in the discretization of the transport operator. MIP as a DSA scheme has been shown to be always stable on triangular cells for isotropic scattering [8] (for highly forward-peaked scattering, DSA is not an efficient preconditioner and one needs to employ an angular multigrid technique [20], whose coarsest angular level can be a diffusion solve; see [21] for instance). The MIP diffusion solve is based on the standard

Interior Penalty (IP) method [22]. Consider the following diffusion update equation:

$$(-\nabla \cdot \mathbf{D} \nabla + \Sigma_a) \delta\phi = Q_0 \quad \text{for } \mathbf{r} \in \mathcal{D} \quad (12)$$

$$\frac{1}{4} \delta\phi - \frac{1}{2} \mathbf{D} \partial_n \delta\phi = 0 \quad \text{for } \mathbf{r} \in \partial\mathcal{D} \quad (13)$$

where \mathbf{D} is the diffusion coefficient and Σ_a is the absorption cross section. For DSA, the volumetric source term is given by the scattering due to the difference in scalar flux between two iterations, $Q_0 = \Sigma_s (\Phi^{(\ell+1/2)} - \Phi^{(\ell)})$, and the known incoming angular flux boundary condition from the transport problem translates into the Robin-type vacuum boundary condition given in Equation (13), where $\partial_n = \mathbf{n} \cdot \nabla$ and \mathbf{n} is the outer normal unit vector on the domain's boundary, $\partial\mathcal{D}$. The MIP weak form for the DSA update equation is given by:

$$a(\delta\phi, b_i) = l(b_i) \quad (14)$$

with the bilinear (matrix) form:

$$\begin{aligned} a(\delta\phi, b_i) = & (\Sigma_a \delta\phi, b_i)_{\mathcal{D}} + (\mathbf{D} \nabla \delta\phi, \nabla b_i)_{\mathcal{D}} + (\kappa_e^{MIP} \llbracket \delta\phi \rrbracket, \llbracket b_i \rrbracket)_{E_h^i} + (\llbracket \delta\phi \rrbracket, \{\!\!\{ \mathbf{D} \partial_n b_i \}\!\!\})_{E_h^i} \\ & + (\{\!\!\{ \mathbf{D} \partial_n \delta\phi \}\!\!\}, \llbracket b_i \rrbracket)_{E_h^i} + (\kappa_e^{MIP} \delta\phi, b_i)_{\partial\mathcal{D}^d} - \frac{1}{2} (\delta\phi, \mathbf{D} \partial_n b_i)_{\partial\mathcal{D}^d} - \frac{1}{2} (\mathbf{D} \partial_n \delta\phi, b_i)_{\partial\mathcal{D}^d} \end{aligned} \quad (15)$$

and the linear (right-hand-side) form

$$l(b_i) = (Q_0, b_i)_{\mathcal{D}}. \quad (16)$$

The notations used are as follows: the domain integral is split onto the element integrals, $(f, g)_{\mathcal{D}} = \sum_{K \in \mathbb{T}_h} (f, g)_K$, with the element integrals defined as $(f, g)_K = \int_K f g \, d\mathbf{r}$; and the integral over all interior edges is $(f, g)_{E_h^i} = \sum_{e \in E_h^i} (f, g)_e$, with the edge integrals defined as $(f, g)_e = \int_e f g \, ds$. In the above, \mathbb{T}_h denotes the partition of domain \mathcal{D} into non-overlapping elements K , E_h^i is the set of interior edges, $\delta\phi$ is the numerical solution for the diffusion correction, and b_i is any test function. Any entry A_{ij} of matrix \mathbf{A} is simply given by $A_{ij} = a(b_j, b_i)$. The resulting matrix \mathbf{A} is SPD [23, 24] and thus can be solved using a preconditioned conjugate gradient technique. The jump and mean value of a variable u at the interface between two elements is defined as follows:

$$\llbracket u \rrbracket = u^+ - u^- \quad \text{and} \quad \{\!\!\{ u \}\!\!\} = \frac{u^+ + u^-}{2}, \quad (17)$$

134 respectively. The definition of the left/right values along a given edge e is

$$u^\pm = \lim_{s \rightarrow 0^\pm} u(\mathbf{r} + s\mathbf{n}_e), \quad (18)$$

135 where \mathbf{n}_e is the normal unit vector associated with the given edge e (on the boundary \mathbf{n}_e is the external
136 normal). The MIP penalty coefficient is given by

$$\kappa_e^{MIP} = \max\left(\kappa_e^{IP}, \frac{1}{4}\right) \quad (19)$$

137 with:

$$\kappa_e^{IP} = \begin{cases} \frac{c}{2} \left(\frac{D^+}{h_\perp^+} + \frac{D^-}{h_\perp^-} \right) & \text{on interior edges, i.e., for } e \in E_h^i \\ c \frac{D}{h_\perp} & \text{on boundary edges, i.e., for } e \in \partial\mathcal{D} \end{cases} \quad (20)$$

138 where c is a constant (chosen equal to 4 here) and h_\perp is the length of the cell in the direction orthogonal to the
139 edge e . When polygonal cells are employed, there are no simple ways in which to compute h_\perp . To estimate
140 h_\perp , we assume that the polygonal cells do not deviate significantly from regular polygons. In such cases, if
141 the regular polygon has an even number of edges, the orthogonal length equals two times the apothem. The
142 apothem is the line segment between the polygon's center and the midpoint of the polygon's side and its length
143 is equal to twice the polygon's area divided by the polygon's perimeter, $\text{apothem} = 2 \times \frac{\text{area}}{\text{perimeter}}$. If polygon
144 has an odd number of sides, its orthogonal length is given by the sum of the apothem and the circumradius,
145 the latter being the radius of the circle circumscribed to the polygon $\left(\text{circumradius} = \sqrt{\frac{2 \times \text{area}}{N_V \sin\left(\frac{2\pi}{N_V}\right)}} \right)$. A
146 summary of the definitions used for h_\perp for any polygon as a function of the number of vertices is given in
147 Table 1.

Table 1: Orthogonal length h_\perp for different polygonal types : area is the polygon's area; perimeter is the polygon's perimeter; N_V is the number of vertices; L_e is the edge's length.

Number of vertices	3	4	> 4 and even	> 4 and odd
h_\perp	$2 \times \frac{\text{area}}{L_e}$	$\frac{\text{area}}{L_e}$	$4 \times \frac{\text{area}}{\text{perimeter}}$	$2 \times \frac{\text{area}}{\text{perimeter}} + \sqrt{\frac{2 \times \text{area}}{N_V \sin\left(\frac{2\pi}{N_V}\right)}}$

148 Matrix \mathbf{A} , given by Equation (15), can be assembled by looping over cells K and edges e . The elementary
149 cell mass and stiffness matrices are $(\Sigma_a b_i, b_j)_K$ and $(D \nabla b_i, \nabla b_j)_K$, respectively. Note that since the DFEM
150 trial spaces are identical between the S_n transport equations and the DSA equations, only the computation

of the elementary stiffness matrix needs to be implemented. The elementary edge matrices are of the form $(b_i, b_j)_e$, $(\partial_n b_i, b_j)_e$, and $(b_i, \partial_n b_j)_e$: the first matrix (a 1D mass matrix) is already needed at the S_n transport solve level to compute the upwind flux contribution; only the second matrix needs to be implemented for the DSA solve (the third edge matrix is simply the transpose of the second one). In conclusion, only a few additional matrices need to be coded at the cell level to discretize the MIP-DSA equations using discontinuous finite elements.

4. MIP-DSA Solves Based on Algebraic Multigrid Techniques

4.1. AMG Principles

A common way to solve an SPD system of equations is to use a Conjugate Gradient (CG) technique preconditioned with Symmetric Gauss-Seidel (PCG-SGS) or SSOR (PCG-SSOR); SGS is simply SSOR with a damping factor of one. Here, we compare CG preconditioned with Symmetric Gauss-Seidel (PCG-SGS) with CG preconditioned with an algebraic multigrid method. PCG-SGS was chosen because little difference was noted when employing other damping factors for MIP-DSA on triangular grids [25]. In our implementation, we have linked our code with the ML package [13] of the Trilinos library and with the AGMG library [14]. ML is a multigrid preconditioning package that uses a smoothed aggregation algebraic multigrid to build a preconditioner for a Krylov method. AGMG is an aggregation-based algebraic multigrid library written in Fortran 90. The first multigrid methods developed were geometric multigrid techniques, used as stand-alone solvers. In many applications, they achieve the so-called “textbook multigrid efficiency”, i.e., “the solutions to the governing system of equations are attained in a computational work which is a small (less than 10) multiple of the operation count in the discretized system of equations” [26]. However, in many other applications, multigrid methods, and particularly algebraic multigrid methods, may not achieve such efficiency, [27] and, in such cases, they are often used as preconditioner for Krylov subspace methods.

Before describing a general multigrid method, we recall the process using two grids. Consider the following system

$$\mathbf{A}_f u_f = b_f, \quad (21)$$

defined on a fine grid Γ_f . The two-grid algorithm is as follows:

1. Perform ν_1 pre-smoothing iterations using a smoother (Jacobi, Gauss-Seidel, or ILU) and an initial guess u_0 : $u = S^{\nu_1}(u_0, b_f)$

- 178 2. Compute the residual on the fine grid Γ_f and restrict it to the coarse grid Γ_c : $r_c = \mathbf{R}(b_f - \mathbf{A}_f u)$;
- 179 3. Solve the system on the coarse grid: $v = \mathbf{A}_c^{-1} r_c$;
- 180 4. Interpolate the coarse grid correction to the fine grid and add the correction to u : $u \leftarrow u + \mathbf{P}v$;
- 181 5. Perform ν_2 post-smoothing iterations: $u = S^{\nu_2}(u, b_f)$.

182 When using AMG, the matrix \mathbf{A}_c on the coarse grid is given by the Galerkin approximation:

$$\mathbf{A}_c = \mathbf{R}\mathbf{A}_f\mathbf{P}, \quad (22)$$

183 where \mathbf{P} is a prolongation matrix and \mathbf{R} is a restriction matrix. Generally, solving the system $\mathbf{A}_c v = r_c$
 184 on the coarse grid is still quite expensive, therefore this step is recursively replaced by n_γ sequences of the
 185 two-grid method until the system can be efficiently inverted with a direct solver. When $n_\gamma = 1$, respectively
 186 $n_\gamma = 2$, the multigrid method is said to use a V -cycle, respectively a W -cycle. Figure 1 shows typical V -
 187 and W -cycles. In Figure 1, a dot represents a smoothing operation and a square a direct inversion; the grid
 188 transfer operators are symbolized by the line segments.

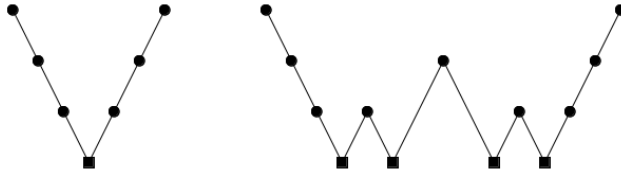


Figure 1: V - and W -cycles.

189 The main difference between geometric and algebraic multigrid techniques lies in the method used to
 190 coarsen the grid. Algebraic multigrid methods only use the properties of the matrix. Among the algebraic
 191 multigrid methods, there are three main categories: the classical Ruge-Stueben AMG, the plain aggregation
 192 AMG, and the smoothed aggregation AMG. ML uses smoothed aggregation AMG and AGMG uses plain
 193 aggregation AMG. Next, we briefly explain the coarsening step in the ML and AGMG implementations. The
 194 coarsening step is a crucial step because convergence rates will decrease if coarsening occurs too quickly.
 195 However, if coarsening is too slow, more memory may be required to solve the problem.

4.2. The ML Package of Trilinos

When using a smoothed aggregation scheme, the smoothed interpolation operators \mathbf{P}_k , where k is the level in the multigrid, are the transpose of the coarsening operators $\mathbf{R}_k = \mathbf{P}_k^T$. Therefore, when the \mathbf{P}_k matrices are built, the coarsening operator is also known. First, the graph of the matrix is constructed: if element (i, j) or (j, i) of the matrix is non-zero, an edge is built between the vertex i and the vertex j [13]. Second, the vertices are aggregated. When using ML on a single processor, two aggregation schemes can be used: the uncoupled scheme or the maximally independent sets (MIS) scheme. The uncoupled scheme tries to build aggregates of size 3^d where d is the dimension of the problem; its algorithm proceeds as follows [28]:

Step 1: As long as there are points not adjacent to an aggregate:

1. Choose a point which is not an adjacent to an aggregate. This point is a new root point.
2. Define a new aggregate as the root point and its neighbors .

Step 2: Add all the points left to the existing aggregates or form new aggregates with them.

The MIS scheme used in ML applies the MIS algorithm [29] to the graph of the matrix \mathbf{A}^2 . These two coarsening schemes use a fixed ratio of coarsening between levels. Once the aggregation is done, a tentative prolongation matrix, $\tilde{\mathbf{P}}_k$ is constructed [28]. An example of $\tilde{\mathbf{P}}_k$ is given by:

$$\tilde{\mathbf{P}}_k(i, j) = \begin{cases} 1 & \text{if the } i^{th} \text{ point is contained in the } j^{th} \text{ aggregate} \\ 0 & \text{otherwise} \end{cases} \quad (23)$$

This tentative prolongation operator could be used as is but smoothing it allows to have a more robust scheme. Let \mathbf{S}_k be a smoother, for example damped Jacobi. Then, the prolongation matrix is given by:

$$\mathbf{P}_k = \mathbf{S}_k \tilde{\mathbf{P}}_k. \quad (24)$$

4.3. The AGMG Package

Unlike ML, the prolongation operator in AGMG is not smoothed; this results in a cheaper setup and a decrease in memory requirements [16]. However, such a scheme could be less robust. To counteract this weakness, the aggregation scheme is more involved. Coarsening algorithms that control the size of the aggregates tend to produce a few badly shaped aggregates. Since the convergence of AMG is bounded

by the worst aggregate, even a small number of badly shaped aggregates can have a huge impact on the convergence. In AGMG, the aggregation algorithm has as input the upper bound of the two-grid condition number. When the aggregates are constructed, their quality is checked. This increases the cost of the coarsening and therefore, it is important that the coarsening is fast enough. Such an algorithm does not control the size of the aggregates, and, therefore, it is difficult to control the speed of coarsening. However, controlling the condition number rather than the coarsening speed can be an effective alternative approach. By monitoring the condition number, bad aggregates will not be created and, instead, a few aggregates below the target size may be generated. This does not affect the efficiency of the method in a noticeable way [16]. A simple way to create the aggregates would be to try to exhaust all of the possible combinations, compute their quality, and then choose the optimal coarsening. In practice, this would be too costly, and, in AGMG, the aggregation step is done by a few passes of a pairwise aggregation algorithm. Each pass aggregates the variables two by two to allow a simple computation of the aggregate quality and to keep the cost per iteration low.

5. Numerical Results

In this section, we present two series of results. First, Fourier analyses are carried out to analyze the performance of the MIP-DSA acceleration scheme for an homogeneous infinite medium meshed with rectangular cells and discretized with PWLD finite elements. The effects of the S_n order and the cell aspect ratio on the spectral radius of the iterative scheme are also studied. Second, the MIP-DSA technique is implemented in a 2D S_n code that uses arbitrary polygonal grids with a PWLD spatial discretization. Numerical examples employ several mesh types: arbitrary quadrilaterals; arbitrary polygons; a grid containing a regular layout of hexagons/triangles/rectangles; and a grid that mimics adaptive mesh refinement performed on rectangular cells. The MIP-DSA diffusion solves are performed using various linear solvers: Conjugate Gradient (CG); Conjugate Gradient Preconditioned with Symmetric Gauss-Seidel (PCG-SGS); Conjugate Gradient Preconditioned with ML using Uncoupled aggregation (PCG-ML/U); Conjugate Gradient Preconditioned with ML using MIS aggregation (PCG-ML/MIS); and Conjugate Gradient Preconditioned with AGMG (AGMG). The diffusion solves employing CG, PCG-SGS, PCG-ML/U, and PCG-ML/MIS are all carried out through calls to the Trilinos library. Unless stated otherwise, ML is used with all the parameters set to the values corresponding to the “SA” option. This is the option recommended for symmetric positive definite or nearly symmetric positive definite systems [13]. AGMG is used with default parameters.

5.1. Fourier Analyses

Fourier analysis is often performed to assess some of the properties of DSA-accelerated transport solves [3, 4, 5]. In a Fourier analysis, the eigenvalues of the iteration matrix are analyzed, assuming a Fourier ansatz for the error modes. Specifically, the iteration matrices for the SI and SI+DSA schemes are given by

$$DL^{-1}M\Sigma \quad \text{and} \quad I - (I + A^{-1}\Sigma)(I - DL^{-1}M\Sigma), \quad (25)$$

respectively. The error modes are of the form $\exp(i\mathbf{\Lambda} \cdot \mathbf{r})$ with the wave number $\mathbf{\Lambda} = [\lambda_x, \lambda_y]^T$. This expression for the error modes is inserted into the discretized equations and the spectral radius (largest eigenvalue in magnitude) of the iteration matrices are sought for $0 \leq \lambda_x \leq 2\pi/X$ and $0 \leq \lambda_y \leq 2\pi/Y$, where X and Y are the dimensions of the rectangular domain.

5.1.1. Spectral Radius as a Function of the S_n Order

This Fourier analysis is carried on a square cell ($X = Y$) using a triangular Gauss-Legendre-Chebyshev (GLC) angular quadrature [30]. The medium is homogeneous with a scattering ratio $c = 0.9999$; periodic boundary conditions are used. The results are plotted on Figure 2, where the x -axis is the mesh size in mean free paths and the y -axis is the spectral radius. There are four curves corresponding to different S_n orders: S_2 , S_4 , S_8 , and S_{16} . From Figure 2, we conclude that a PWLD discretization of the MIP-DSA equations is stable for every cell size. The spectral radius is always less than 0.5, except for S_2 where it is about 0.7. In the fine mesh limit, the continuum results are recovered [31]. Notably, the spectral radius of SI+DSA using an S_2 quadrature in 2D undiscretized space is $0.5c$. Also, as the angular quadrature is refined, the standard limit value of $0.2247c$ for the spectral result is reached.

5.1.2. Spectral Radius as a Function of the Cell Aspect Ratio

For this Fourier analysis, we use a S_{16} GLC quadrature. The medium is again homogeneous with $c = 0.9999$, and periodic boundary conditions apply. On Figure 3, the five curves correspond to the following cell aspect ratios: $\frac{Y}{X} = \frac{1}{16}; \frac{1}{4}; 1; 4; 16$; and 100. We note that the MIP-DSA scheme is stable for every aspect ratio tested, including an aspect ratio value of 100, and that the maximum spectral radius shows little sensitivity to the aspect ratio.

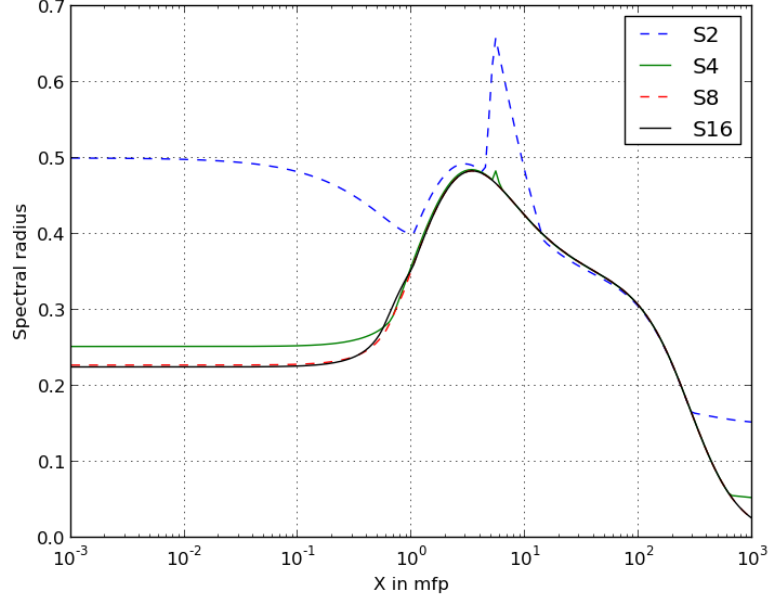


Figure 2: Spectral radius as a function of the mesh optical thickness for various S_n orders (Fourier analysis on a square cell).

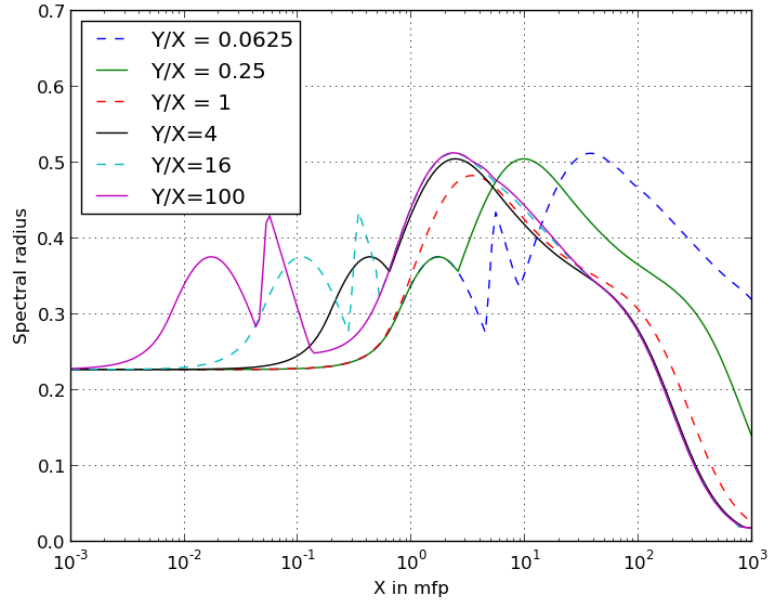


Figure 3: Spectral radius as a function of the mesh optical thickness for various cell aspect ratios (Fourier analysis carried out using an S_{16} angular quadrature).

5.2. Performance of MIP-DSA Implemented in a PWLD S_n Transport Code

The MIP-DSA scheme has been implemented in a 2D S_n code that employs a PWLD discretization for arbitrary polygonal grids. Several test cases are presented. It is important to note that all of the the tests employ convex polygonal cells only because of the implementation of the S_n transport sweep algorithm. In [32], the PWLD discretization for the S_n transport equation was shown to give accurate results even for non-convex polygonal cells.

5.2.1. Homogeneous Test Cases

We compare the different linear solvers employed for MIP-DSA using a homogeneous medium, $100\text{cm} \times 100\text{cm}$, $\Sigma_t = 1\text{cm}^{-1}$ and $\Sigma_s = 0.999\text{cm}^{-1}$, with vacuum boundary conditions and a unit source of intensity $1\text{cm}^{-3}\text{s}^{-1}$. We use an S_8 angular quadrature. A relative tolerance of 10^{-8} is used for the Source Iteration solver while the MIP-DSA solvers employs a relative tolerance of 10^{-10} . The relative tolerance criterion used by the Source Iteration solver is compared to $\frac{\|\Phi^{(\ell+1)} - \Phi^{(\ell)}\|_2}{\|\Phi^{(\ell+1)}\|_2}$. When a Krylov solver is used, the relative tolerance criterion is compared to $\frac{\|\text{residual}\|_2}{\|\text{right hand side}\|_2}$. The domain is discretized using two different meshes:

1. A quadrilateral grid composed of 49263 quadrilateral cells (197,052 degrees of freedom or spatial unknowns per angular direction). This grid was obtained from an unstructured triangular grid in which each triangle was split into 3 quadrangles.
2. A polygonal grid composed of 45,204 triangles, 823 quadrilaterals, 4,978 pentagons, 4,155 hexagons, 725 heptagons, and 24 octagons, for a total of 55,909 cells and 193,991 degrees of freedom. This grid was obtained from the same triangular grid as before. This time, vertices were removed and the triangles containing them were merged into polygons. Since an arbitrary number of triangles may contain a given point, deleting a vertex leads to various polygonal types. The purpose of this example is to test MIP and the different preconditioners on a grid composed of different polygonal cell types.


The meshes and the numerical solutions are given in Figures 4 and 5. In Table 2, results obtained with the different linear solvers for the MIP-DSA equation are compared for the quadrilateral grid. Table 3 provides the results obtained using the polygonal grid. In these tables, *SI iterations* is the number of Source Iterations needed to solve the transport problem, *CG iterations* is the total number of CG iterations used to solve MIP-DSA, *Precond init* is the time, in seconds, needed to initialize the preconditioner used by CG, *MIP calculation* is the total time, in seconds, spent solving DSA during the calculation, and *Total calculation* is the time, in seconds, needed to solve the problem.

In the quadrilateral grid case, DSA reduces the number of transport sweeps from 7,311 to 24. The number of accelerated transport iterations (here 24) is constant, regardless of the linear solver employed in MIP-DSA (as expected). Preconditioning CG significantly reduces the number of CG iterations. We observe that algebraic multigrid approaches, PCG-ML and AGMG, require about the same number of SI iterations (two orders of magnitude less than unpreconditioned CG). However, preconditioned conjugate gradient with AGMG is faster than with ML. With DSA, the 24 transport sweeps take about 160 sec (Total time – MIP time – preconditioner setup, if any). AGMG performs the 24 DSA solves in about 30 sec, while ML/U and ML/MIS use about 190-200 sec; that is, the diffusion solves are more CPU expensive than the transport solves with ML while the diffusion solve runtime is only a fraction of those of the transport solves with AGMG.


We also note that one iteration of PCG-SGS is slower than one unpreconditioned CG iteration. Profiling of the code reveals that the bottleneck in ML is due to a call to the function *Ifpack.PointRelaxation:: ApplyInverseSGS_FastCrsMatrix* of Trilinos. This function applies the forward and the backward substitutions required by SGS. SGS is also employed as a pre- and post-smoother in ML and the lesser performance of all three PCG solves using ML is due to that function. It is unclear why these Gauss-Seidel substitutions are so costly in Ifpack. The same remarks hold for the polygonal grid: DSA is effective at significantly reducing the number of transport sweeps; the number of transport sweeps is the same for any solve with DSA; the AGMG diffusion solve time is a fraction of the transport solve time (30 sec versus 185 sec for the 23 transport sweeps); the PCG diffusion solves with Trilinos are not as fast due to the SGS function of Ifpack. The memory usage of the AGMG package for the polygonal grid was 69.30 Mb, i.e., about 2.62 double precision real per nonzero entry of the diffusion matrix. Finally, the different linear solvers are compared for the polygonal grid when using GMRes in lieu of SI for the transport solves; see, Table 4 where *GMRes iterations* denotes the number of GMRes iterations needed to solve the problem.

Table 2: Comparison of different preconditioners for the homogeneous test problem (quadrilateral cells).

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	7311	24	24	24	24	24
CG iterations	NA	56649	17332	630	604	578
Precond init (s)	NA	NA	0.171358	1.8255	9.56078	0.332
MIP calculation (s)	NA	1095.7	1311.76	192.622	197.632	29.9727
Total calculation (s)	39176.7	1264.98	1477.95	363.202	367.841	194.568

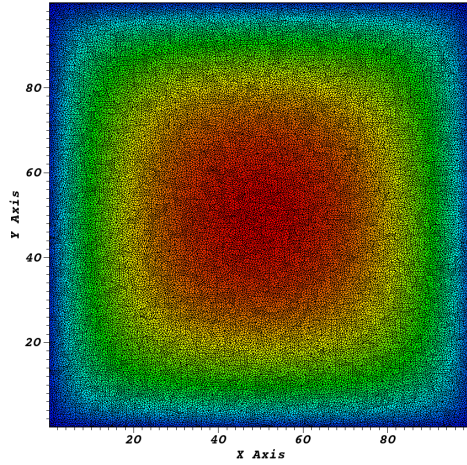


(a) Whole domain

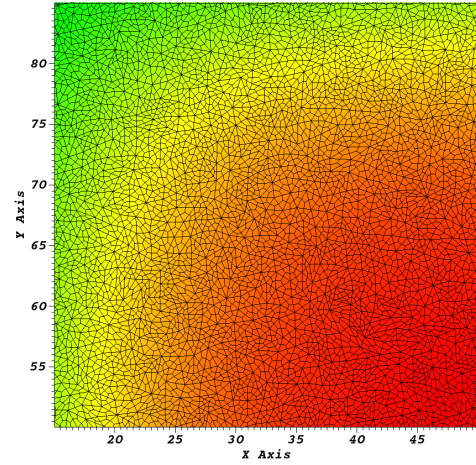


(b) Zoom

Figure 4: Grids and scalar flux solutions for the homogeneous test problem using quadrilateral cells.

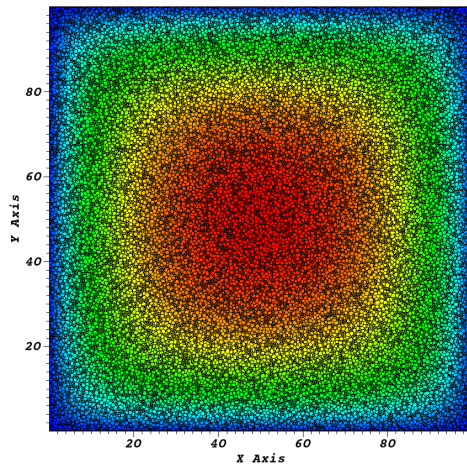

(a) Whole domain

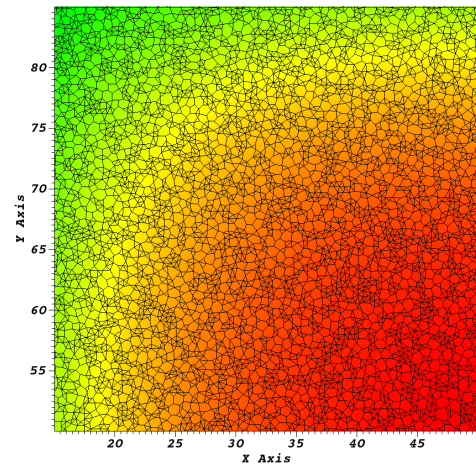

(b) Zoom

Figure 5: Grids and scalar flux solutions for the homogeneous test problem using arbitrary polygonal cells.

Table 3: Comparison of different preconditioners for the homogeneous test problem (polygonal cells) using SI as solver.

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	7311	23	23	23	23	23
CG iterations	NA	46262	16712	652	603	555
Precond init (s)	NA	NA	0.06388	1.73379	8.0426	0.388
MIP calculation (s)	NA	877.861	1263.31	198.63	191.989	31.242
Total calculation (s)	42666.7	1060.53	1447.53	382.275	384.422	216.946

Table 4: Comparison of different preconditioners for the homogeneous test problem (polygonal cells) using GMRes as solver.

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
GMRes iterations	266	12	12	12	12	12
CG iterations	NA	28653	10274	407	390	351
Precond init (s)	NA	NA	0.067561	1.56115	7.8932	0.0331
MIP calculation (s)	NA	546.56	770.244	126.723	120.680	22.3754
Total calculation (s)	1549.17	675.319	898.149	261.121	261.937	162.47

5.2.2. Test Case with Heterogeneous Media

In this example, a heterogeneous geometry with three materials is used. It is composed of 184 triangles, 3,720 quadrilaterals, and 2,791 regular hexagons of side 0.05cm for a total of 6,695 cells and 32,178 degrees of freedom. The domain is 5.28275cm by 4.6cm . Reflective boundary conditions are used. A S_{16} angular quadrature is used. The SI solver has a relative tolerance of 10^{-8} , and the relative tolerance for MIP-DSA is 10^{-10} . Figure 6 shows the problem geometry and the material properties are in given Table 5. The different linear solvers for MIP-DSA are compared in Table 6. The remarks made in Section 5.2.1 for the homogeneous

Table 5: Material Properties For the Different Regions of the Heterogeneous Test Problem

	Inner region	Intermediate region	Outer region
$\Sigma_t \text{ (cm}^{-1}\text{)}$	1.5	1.0	1.0
$\Sigma_s \text{ (cm}^{-1}\text{)}$	1.4999	0.999	0.3
source $\text{(cm}^{-3}\text{s}^{-1}\text{)}$	1.0	0.0	0.0

Table 6: Preconditioners Comparison (Heterogeneous Problem).

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	278	17	17	17	17	17
CG iterations	NA	12214	6679	415	386	248
Precond init (s)	NA	NA	0.0160661	0.368768	1.41632	0.07
MIP calculation (s)	NA	58.422	126.93	33.2225	31.3045	2.924
Total calculation (s)	910.566	120.889	190.413	99.7524	97.4666	70.6424

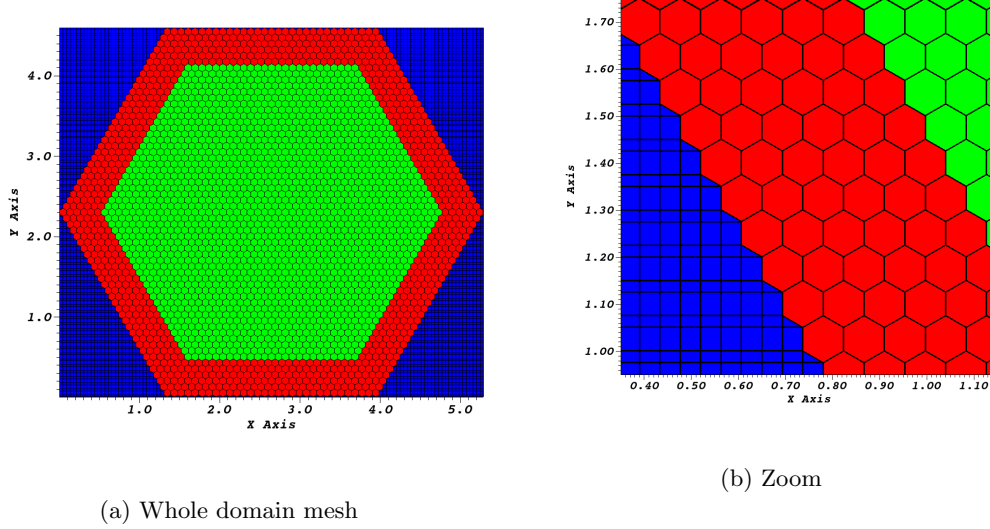


Figure 6: Material Zones for the Heterogeneous Test Problem

test problem remain mostly unchanged. MIP-DSA is effective for this heterogeneous test case, and AGMG is again the most efficient preconditioner. It is interesting to note that, contrary to the homogeneous tests where the number of CG iterations was about identical for all algebraic multigrid preconditioners, in this heterogeneous test case, AGMG requires significantly fewer iterations than both Trilinos implementations, PCG-ML/U and PCG-ML/MIS.

5.2.3. Test Case with Locally Refined Cells

In this example, a 3-material domain of size $10\text{cm} \times 10\text{cm}$ is used. Figure 7a shows the material zoning and the mesh used. The bottom and left sides of the domain have reflective boundary conditions, while the other two sides have vacuum boundary conditions. Material properties are given in Table 7.


The grid used mimics meshes obtained via adaptive mesh refinement: the rectangular cells at the interfaces between two materials are refined once more, leading to a grid composed of 10,482 quadrilaterals, 236 pentagons, and 2 hexagons for a total of 10,720 cells and 43120 degrees of freedom. The distribution of cells is given in Figure 7b.

A S_{16} angular quadrature is employed. The tolerance on SI is 10^{-8} , and the tolerance on the CG solvers is 10^{-10} . The different linear solvers for MIP-DSA are compared in Table 8. The conclusions drawn from this test case are similar to the ones made for our previous tests. This test case demonstrates that degenerate


Table 7: Material Properties (AMR-like Problem)

	Inner region	Intermediate region	Outer region
Σ_t (cm^{-1})	1.5	1.0	1.0
Σ_s (cm^{-1})	1.44	0.9	0.3
Source ($cm^{-3}s^{-1}$)	1.0	0.0	0.0

polygons (here, pentagons and hexagons) do not seem to affect the MIP-DSA acceleration.

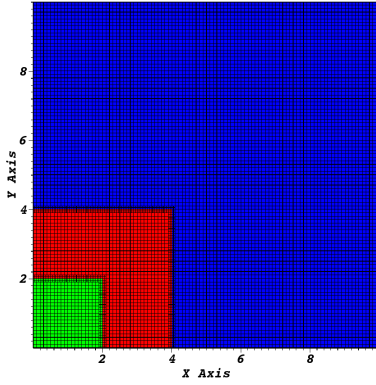

(a) Material regions



(b) Polygons distribution (zoom): quadrilaterals (blue cells), pentagons (green cells), hexagons (red cells)

Figure 7: AMR-like test domain

Table 8: Preconditioners Comparison for the AMR Mesh

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	184	19	19	19	19	19
CG iterations	NA	11300	4734	361	361	264
Precond init (s)	NA	NA	0.043463	0.358002	1.19301	0.0111
MIP calculation (s)	NA	48.1908	81.0992	25.2699	25.0699	2.56198
Total calculation (s)	802.985	138.825	172.423	116.018	116.517	94.1963

5.2.4. Test Cases High Aspect Ratio Grids

In these two examples, a square domain of $100cm \times 100cm$ with vacuum boundaries is employed. There are 10,000 cells (thus, 40,000 degrees of freedom). Again, the relative tolerance on SI is 10^{-8} and the relative tolerance for CG is 10^{-10} . An S_8 GLC angular quadrature is used. $\Sigma_t = 1cm^{-1}$, $\Sigma_s = 0.999cm^{-1}$ and the source is $1n/(cm^3s)$. In the first run, the domain is discretized using 100 subdivisions of the x and y axes, i.e., 10,000 square cells with an aspect ratio of one. In the second run, the domain is discretized using 1,000 subdivision along x and 10 along y (the aspect ratio is then 100). As expected, solving the MIP-DSA

equations requires more CG iterations when the aspect ratio increases. PCG-ML/U and PCG-ML/MIS are significantly more affected by the increase in the aspect ratio than the other methods. AGMG is the least affected by the change of aspect ratio and is again the best performing preconditioner.

Table 9: Preconditioners Comparison for a Rectangular Grid with an Aspect Ratio of 1

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	7311	21	21	21	21	21
CG iterations	NA	8363	4853	376	375	221
Precond init (s)	NA	NA	0.01422	0.051373	1.13144	0.044
MIP calculation (s)	NA	32.3825	73.8422	24.0707	25.0065	1.7114
Total calculation (s)	7356.96	56.8993	98.2609	50.1247	51.5396	25.9306

Table 10: Preconditioners Comparison for a Rectangular Grid with an Aspect Ratio of 100

	No-DSA	CG	PCG-SGS	PCG-ML/U	PCG-ML/MIS	AGMG
SI iterations	7304	24	24	24	24	24
CG iterations	NA	84802	43466	14180	13896	821
Precond init (s)	NA	NA	0.0164239	0.362463	1.03128	0.052
MIP calculation (s)	NA	372.227	742.902	941.06	922.258	6.93176
Total calculation (s)	9035.6	414.301	784.77	985.796	966.77	44.7032

5.2.5. Test Case with Degenerated Polygons

In this test, we show that MIP-DSA discretized with PWLD is efficient, even for highly degenerated polygons. A source-free homogeneous problem ($\Sigma_t = 1\text{cm}^{-1}$ and $\Sigma_s = 0.99999\text{cm}^{-1}$) of dimension $100\text{cm} \times 100\text{cm}$ is used. An isotropic incoming flux of intensity $5\text{cm}^{-2}\text{ster}^{-1}\text{s}^{-1}$ is applied on the bottom boundary; a vacuum boundary condition is set on the top; the left and right boundaries are reflective. We use an S_8 angular quadrature. A relative tolerance of 10^{-6} is used for the Source Iteration solver while the MIP-DSA solvers employs a relative of 10^{-8} . The mesh is composed of 10 rectangular shaped cells: the first cell has 5 vertices, the second cell has 7, and so on and so forth until the tenth cell which has 23 vertices. There is a total of 140 spatial degrees of freedom. The mesh is shown in Figure 8. Without DSA, SI needs 17,592 iterations to converge whereas it takes only 20 iterations when MIP-DSA is employed. The scalar flux solution is shown on Figure 9a and the contour lines of the scalar flux are shown on Figure 9b.

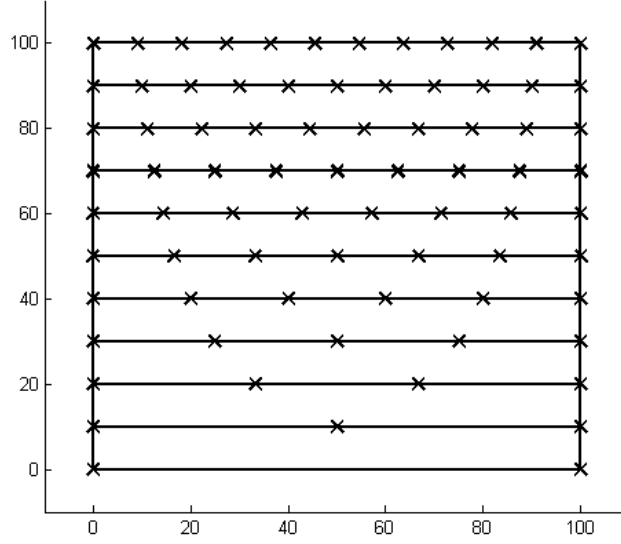


Figure 8: Grid composed of degenerated polygons.

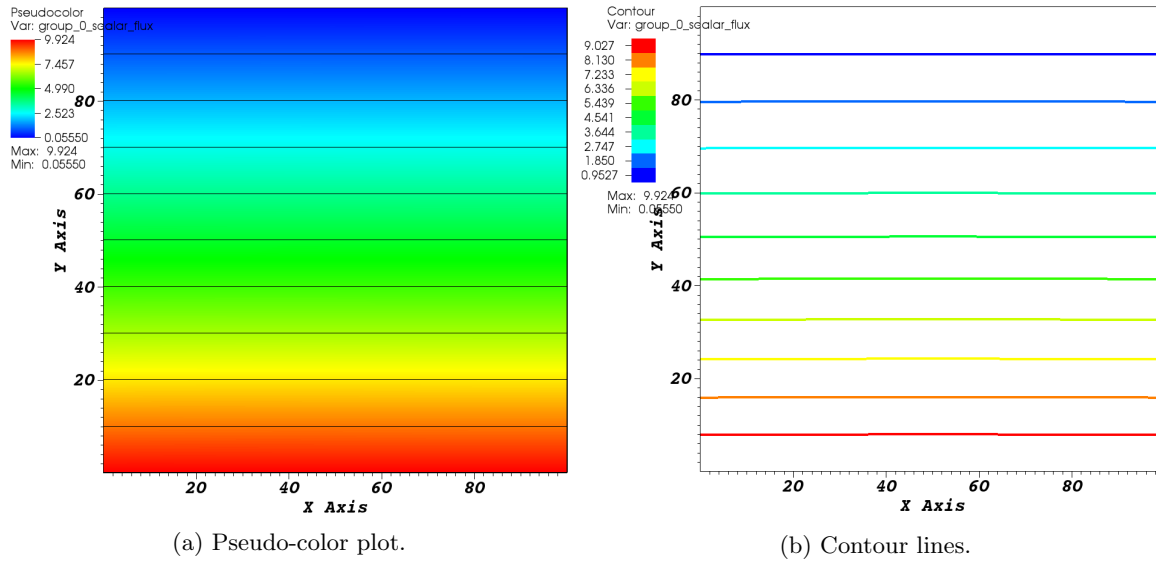


Figure 9: Solution obtained on a mesh made of degenerated polygons.

6. Conclusions

We have extended the Modified Interior Penalty (MIP) form of Diffusion Synthetic Acceleration (DSA) to S_n radiation transport solves performed on arbitrary polygonal grids discretized with Piece-Wise Linear Discontinuous finite elements. The MIP-DSA equation employs the same discontinuous finite element trial spaces as the spatial discretization of the S_n transport equation. As such, only a few additional elementary matrices need to be implemented to an existing S_n code.

Fourier analyses show that the PWLD discretization of the MIP diffusion synthetic accelerator is stable and effective, including for cells with high-aspect ratios. Numerical experiments have been performed with grids containing various types of polygonal cells (random quadrilaterals, random polygons), including grids with different polygon types for a given mesh and tests with degenerate polygons that mimic grids obtained in adaptive mesh refinement strategies. In these tests, MIP-DSA always performed effectively, reducing significantly the number of Source Iterations needed for convergence. We noted that the effectiveness of MIP does not seem to be affected by the meshes employed.

The MIP-DSA matrix is Symmetric Positive Definite (SPD) and we solved the resulting linear system of equations using a standard Conjugate Gradient method with different preconditioners. Algebraic multigrid techniques (AGMG and ML) were found to be the most effective preconditioner.

We conclude that MIP-DSA is an effective alternative to carry out diffusion synthetic accelerations for S_n radiation transport problems on arbitrary polygonal grids and grids obtained through mesh adaptivity. Future extensions of this work will include the implementation of the MIP-DSA equations in a 3D parallel S_n code.

- [1] StarCCM+: Polyhedral mesh generation, <http://www.cd-adapco.com/cfdImage/polyhedral-mesh-generation>, accessed on May 7, 2014.
- [2] Youcef Saad and Martin H. Schultz. GMRES: A Generalized Minimal Residual Algorithm for Solving Nonsymmetric Linear Systems. *SIAM Journal on Scientific and Statistical Computing*, 7(3):856–869, 1986.
- [3] Marvin L. Adams and Edward W. Larsen. Fast iterative methods for discrete-ordinates particle transport calculations. *Progress in Nuclear Energy*, 40:3–159, 2002.

- [4] E. W. Larsen. Diffusion-Synthetic Acceleration Methods for Discrete-Ordinates Problems. *Transport Theory and Statistical Physics*, 13:107–126, 1984.
- [5] James S. Warsa, Todd A. Wareing, and Jim E. Morel. Fully Consistent Diffusion Synthetic Acceleration of Linear Discontinuous S_N Transport Discretizations on Unstructured Tetrahedral Meshes. *Nuclear Science and Engineering*, 141(3):236–251, July 2002.
- [6] E. W. Larsen. Unconditionally Stable Diffusion-Synthetic Acceleration Methods for Slab Geometry Discrete Ordinates Equations. Part I: Theory. *Nuclear Science and Engineering*, 82, 1982.
- [7] T. A. Wareing, E. W. Larsen, and M. L. Adams. Diffusion Accelerated Discontinuous Finite Element Schemes for the Sn Equations in Slab and X-Y Geometries. *Proc. Int. Topl. Mtg. Advances in Mathematics, Computations, and Reactor Physics, Pittsburgh, Pennsylvania*, April 28 - May 2 1991.
- [8] Y. Wang and J.C. Ragusa. Diffusion Synthetic Acceleration for High-Order Discontinuous Finite Element S_n Transport Schemes and Application to Locally Refined Unstructured Meshes. *Nuclear Science and Engineering*, 166:145–166, 2010.
- [9] James S. Warsa. A Continuous Finite Element-Based, Discontinuous Finite Element Method for Sn Transport. *Nuclear Science and Engineering*, 160:385–400, 2008.
- [10] Anthony P. Barbu and Marvin L. Adams. Semi-Consistent Diffusion Synthetic Acceleration for Discontinuous Discretizations of Transport Problems. *International Conference on Mathematics, Computational Methods and Reactor Physics, Saratoga Springs, New York*, May 3-7 2009.
- [11] William L. Briggs, Van Emden Henson, and Steve F. McCormick. *A Multigrid Tutorial*. Second edition, 2000.
- [12] Christian Wagner. *Introduction to Algebraic Multigrid*. 1998. Course Notes of an Algebraic Multigrid Course at the University of Heidelberg in the Winter Semester 1998/1999.
- [13] M.W. Gee, C.M. Siefert, J.J. Hu, R.S. Tuminaro, and M.G. Sala. ML 5.0 Smoothed Aggregation User’s Guide. Technical Report SAND2006-2649, Sandia National Laboratories, 2006.
- [14] Yvan Notay. User’s Guide to AGMG. Technical report, Universite Libre de Bruxelles, 2011.

- [15] Y. Notay. An aggregation-based algebraic multigrid method. *Electronic Transactions on Numerical Analysis*, 37:123–146, 2010.
- [16] Artem Napov and Yvan Notay. An algebraic multigrid method with guaranteed convergence rate. *SIAM Journal of Scientific Computing*, 34(2):1079–1109, 2012.
- [17] Yvan Notay. Aggregation-based algebraic multigrid for convection-diffusion equations. *SIAM Journal of Scientific Computing*, 34(4):2288–2316, 2012.
- [18] Todd A. Wareing, John M. McGhee, Jim E. Morel, and Shawn D. Pautz. Discontinuous Finite Element S_N Methods on Three-Dimensional Unstructured Grids. *Nuclear Science and Engineering*, 138:256–268, January 2011.
- [19] Hiromi G. Stone and Marvin L. Adams. A piecewise linear finite element basis with application to particle transport. *Nuclear Mathematical and Computational Sciences : A Century in Review, A Century Anew, Gatlinburg, Tennessee*, April 2003.
- [20] J.E. Morel and T.A. Manteuffel. An Angular Multigrid Acceleration Technique for S_n Equations with Highly Forward-Peaked Scattering. *Nuclear Science and Engineering*, 107:330–342, 1991.
- [21] Bruno Turcksin, Jean C. Ragusa, and Jim E. Morel. Angular Multigrid Preconditioner for Krylov-based Solution Techniques applied to the S_n Equations with Highly Forward-Peaked Scattering. *Transp. Theor. & Stat. Phys.*, 41:1–22, 2012.
- [22] G. Kanschat. *Discontinuous Galerkin Methods for Viscous Incompressible Flow*. Advances in Numerical Mathematics. Teubner Research, Wiesbaden, Germany, 2007.
- [23] D. N. Arnold. An interior penalty finite element method with discontinuous elements. *SIAM J. Numer. Anal.*, 19:742–760, 1982.
- [24] Douglas N Arnold, Franco Brezzi, Bernardo Cockburn, and Donatella Marini. Discontinuous galerkin methods for elliptic problems. In *Discontinuous Galerkin Methods*, pages 89–101. Springer, 2000.
- [25] Yaqi Wang. Personal E-mail communication (2012-08-29).
- [26] James L. Thomas, Boris Diskin, and Achi Brandt. Textbook Multigrid Efficiency for Fluid Simulations. *Annual Review of Fluid Mechanics*, 35:317–340, January 2003.

- 445 [27] Yvan Notay and Panayot S. Vassilevski. Recursive Krylov-based multigrid cycles. *Numerical Linear*
446 *Algebra with Applications*, 15:473–487, 2008.
- 447 [28] Ray S. Tuminaro and Charles Tong. Parallel Smoothed Aggregation Multigrid: Aggregation Strategies
448 on Massively Parallel Machines. *SC Conference*, 0:5, 2000.
- 449 [29] Mark T. Jones and Paul E. Plassmann. A Parallel Graph Coloring Heuristic. *SIAM Journal on Scientific*
450 *Computing*, 14:654, 1992.
- 451 [30] Richard Sanchez and Jean C. Ragusa. On the construction of galerkin angular quadratures. *Nuclear*
452 *Science and Engineering*, 169:133–154, 2011.
- 453 [31] Marvin L. Adams and Todd A. Wareing. Diffusion-synthetic acceleration given anisotropic scattering,
454 general quadratures, and multidimensions. *Conference: American Nuclear Society(ANS) annual meeting,*
455 *San Diego*, 68, June 1993.
- 456 [32] Teresa S. Bailey. *The piecewise linear discontinuous finite element method applied to the RZ and XYZ*
457 *transport equations*. PhD thesis, Texas A&M University, 2008.

LaTeX Source Files

[Click here to download LaTeX Source Files: resubmit.zip](#)