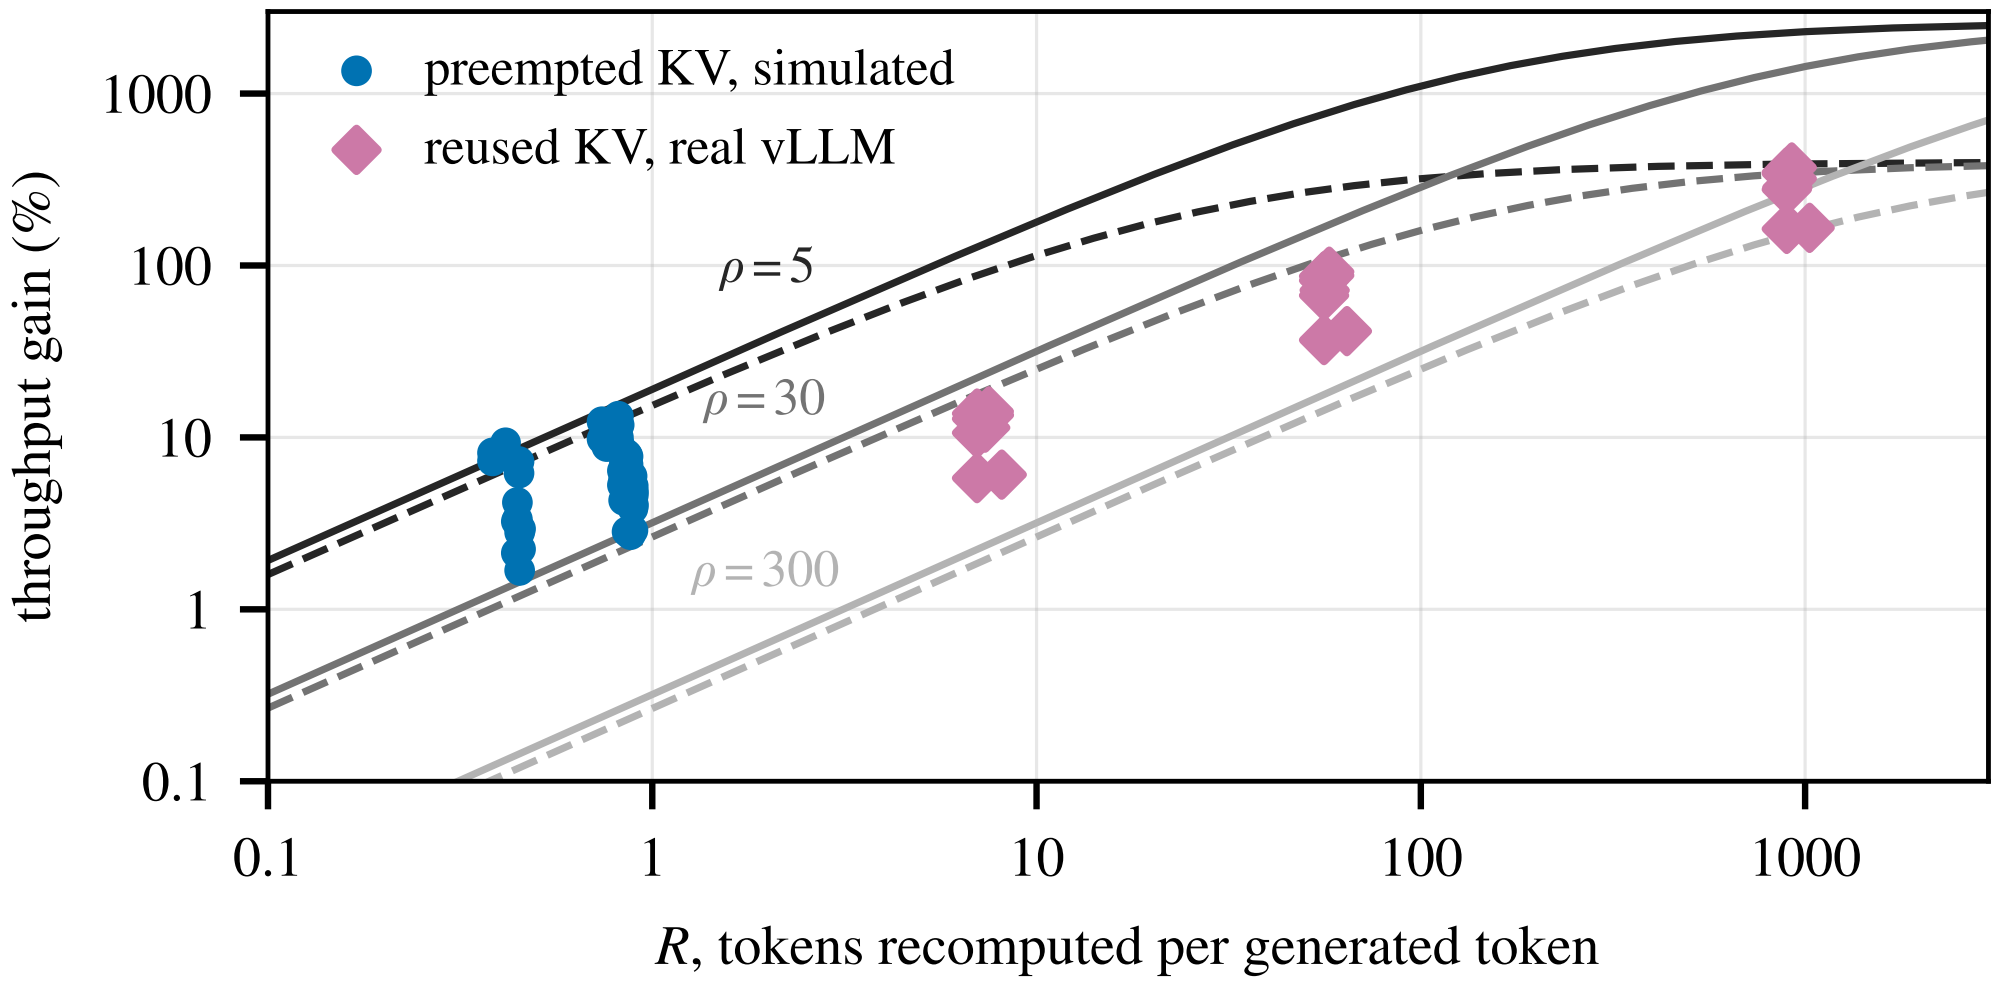
preempted KV, simulated
reused KV, real vLLM
$\rho = 5$
$\rho = 30$
$\rho = 300$
throughput gain (%)
1000
100
10
1
0.1
0.1
1
10
100
1000
R, tokens recomputed per generated token