





FIRE
UNDER
CONTROL



FIRE UNDER CONTROL
RONAK

Ronak Fire India Pvt. Ltd.

An ISO 9001:2015 Certified Company

JAS-ANZ
M14480616IN
MEMBER OF MULTILATERAL RECOGNITION ARRANGEMENT





Introduction


Ronak Fire India Pvt. Ltd. is amongst India's one of the top manufacturers and full solution providers of firefighting equipment, fire protection system, fire alarm, security systems and safety engineering under one group.


Dedicated to the science of fire fighting, RONAK was established with a vision to be the Indias most recognized fire fighter manufacturer and solutions provider. Led from the front by its Director Ex-defense personal with more than Twenty years of experience behind him with innovative ideas, we have a team of experienced & technically skilled personnel for Development and manufacture of Quality I.S.I. Standard in our adequate organized factory with the availability of excellent infrastructure facilities.

RONAK has been consistently mainting ISO 9001:2015 Quality Managemennt System certifiedby JAS-ANZ Our strong customer oriented policies backed by stringent Quality Control based on the philosophy of consistency whereby only best get out of the plant has earned us a valuable client list which includes reputed National & Multinational Companies including Government estiblishments.

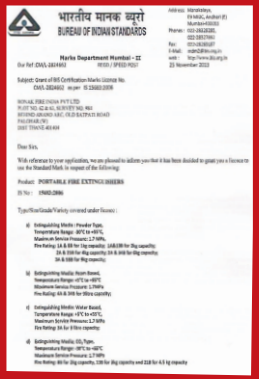

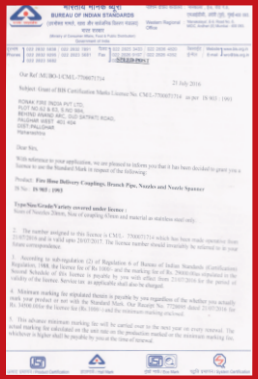

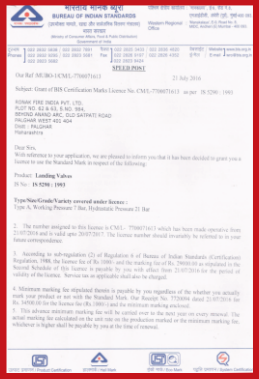

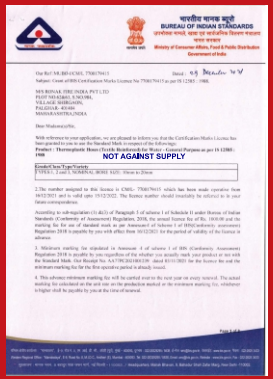
NOT AGAINST SUPPLY


CERTIFICATE
RONAK FIRE INDIA PVT. LTD
ISO 9001: 2015
(Quality Management System)

Factory



Lab



Store






Company Profile


RONAK implemented top notch Systems by adopting best business practices to enhance efficiency and transparency by controlling key operations with continuous improvement.


RONAK mission is to empower customer to secure life, property and business by delivering high quality and innovative fire protection solutions and knowledge using world class manufacturing processes through best engineering practice and expand it worlwide.

A Company of young Professionals Production Specialists, Quality Control Experts and Professional Marketing Sales Personnel with a dynamic Group of after Sales Service Personnel.

- A Group with valuable Association of Multinational Companies.
- A Company with Strength to know what latest available in terms of Products and Technologies.
- A Company with Products matching the best of International Quality Standard.
- A Company with Large Manufacturing Capacities.
- A Company with Global Vision.
- A Company with High Quality of Imagination, Spirit & Implementation Capabilities.







Fire Extinguisher | Hose Reel | Fire Hydrant System

Dry Chemical Powder A.B.C. Type
Fire Extinguisher (Stored Pressure Type)

IS:15683 : 2006
CM/L-2824662



Suitable for Class 'A', 'B' and 'C' Fires involving Wood, Paper, Burning Liquids, Oil Petrol, Paints, Electricity, Gases Etc.

Specifications

IS Specification	:	IS:15683:2018
Capacity	:	1 kg. / 2 kg. / 4 kg. / 6 kg. / 9 kg.
Construction	:	Manufactured out of E.D.D. Quality Seamless Bottom welded
Charge	:	Dry Chemical Powder Mono Ammonium Phosphate Base.
Anti corrosive Treatment	:	Internally-Lead Tin Coating by electrolytic process. Externally-Lead Tin Coating with Fire Red Paint.
Accessories	:	Wall mounting brackets.
Operation	:	Pull out Safety Pin, Detach hose from the bracket and aim at the base of fire while Holding.
Maintenance	:	The Fire Extinguisher must be maintained as per IS:2190 For satisfactory performance.
	:	Easy to use

Performance Data

MODEL	1	2	4	6	9
Capacity	1 Kg	2 Kg	4 Kg	6 Kg	9 Kg
Fire Rating	1A:21B	1A:34B	2A:55B	3A:89B	4A:144B
Average discharge time	9.0sec	14.0sec	18.0sec	21.0sec	23.0sec
Jet Range	2mt.	2mt.	4mt.	4mt.	8mt.
Height without base	325 mm	390 mm	500 mm	530 mm	600 mm
Diameter (Approx)	86±10mm	108 mm	140 mm	150 mm	180 mm
Filled weight (Approx)	2Kg.	3.4Kg.	6.7Kg.	9Kg.	13.18Kg.
Empty weight (Approx)	1Kg.	1.4Kg.	2.7Kg.	3Kg.	4.18Kg.
Operating Temperature			-30°C to +60°C		
Working Pressure at 20°C	15 bar	15 bar	15 bar	15 bar	15 bar
Maximum Service Pressure	17 bar	17 bar	17 bar	17 bar	17 bar
Test Pressure	35 bar	35 bar	35 bar	35 bar	35 bar
Approval	BIS	BIS	BIS	BIS	BIS

Pressure Test Hydro : 30 bar
Working Pressure : Not exceed 15 bar
Bursting Pressure : 45 bar

Body : Mild Steel (EDD Quality)
Valve : Brass forged
Hose : Pre Braided

Carbon Dioxide Fire Extinguisher For "B" & "C" Class of Fire

IS:15683 : 2006
CM/L-2824662



Suitable for all Flammable Liquids, Gases, Live & Delicate, Machinery Fire, Electrical & Sophisticated Electronic Equipments Fires Transformer & Switch Gear Fire

Specifications

Carbon Dioxide Fire Extinguisher is Made Of Seamless Manganese Steel.
This Extinguisher is Approved By Explosive Department, Govt. of India, Nagpur

PERFORMANCE DATA			
MODEL	2	3	4.5
Capacity	2 Kg	3 Kg	4.5 Kg
Fire Rating	21B	34 B	55 B
Average discharge time	12sec	14sec	14sec
Height (Approx)	425 mm	470 mm	610 mm
Diameter (Approx)	108mm±10mm	140mm±10mm	140mm±10mm
Filled weight (Approx)	8.9kg or 8.2kg	12.5kg or 11.8kg	17kg or 16.3kg
Empty weight (Approx)	6.9kg or 6.2kg	9.5kg or 8.8kg	12.5kg or 11.8kg
Operating Temperature	-30°C to +60°C	-30°C to +60°C	-30°C to +60°C
Working Pressure at 20°C	150 bar	150 bar	150 bar
Maximum Service Pressure	250 bar	250 bar	250 bar
APPROVAL	BIS	BIS	BIS

WATER TYPE FIRE EXTINGUISHER



IS Specification : IS 15683 : 2018
Capacity : 9 Ltrs.
Construction : Manufactured out of E.D.D. Quality Seamless Bottom welded
Charge : Water
Anti corrosive
Treatment : Internally - Lead Tin Coating by electrolytic process externally Lead Tincoating with Fire Red Paint
Accessories : Wall mounting Brackets.
Operation : Pull out Safety Pin, Detach hose form the bracket and aim at the base of fire while holding.
Maintenance : The fire Extinguisher must be maintained as per IS:2190 For satisfactory performance.
: Easy to use.

PERFORMANCE DATA	
MODEL	9
Capacity	9 L
Fire Rating	3A
Average discharge time	42sec
Height (Approx)	575 mm
Diameter (Approx)	180mm±10mm
Filled weight (Approx)	12.5kg
Empty weight (Approx)	3.7Kg
Operating Temperature	+5°C to +60°C
Working Pressure at 20°C	15 bar
Maximum Service Pressure	17 bar
Test Pressure	35 bar
Approval	BIS

Suitable for 'A' Class Fire Paper, Textile, Cloth Wood

MECHANICAL FOAM TYPE FIRE EXTINGUISHER



IS Specification : IS 15683 : 2018
Capacity : 9 Ltrs.
Construction Quality : Manufactured out of E.D.D. Seamless Bottom welded
Charge : Foam Compound
Anti corrosive
Treatment : Internally - Lead Tin Coating by electrolytic process externally Lead Tincoating with Fire Red Paint.
Accessories : Wall mounting Brackets.
Operation : Pull out Safety Pin, Detach hose form the bracket and aim at the base of fire while holding.
Maintenance : The fire Extinguisher must be maintained as per IS:2190 For satisfactory performance. :
Easy to use.

PERFORMANCE DATA	
MODEL	9
Capacity	9 L
Fire Rating	4A:89B
Average discharge time	50 sec
Height (Approx)	575 mm
Diameter (Approx)	180mm±10mm
Filled weight (Approx)	12.5kg
Empty weight (Approx)	3.8Kg
Operating Temperature	+5°C to +60°C
Working Pressure at 20°C	15 bar
Maximum Service Pressure	17 bar
Test Pressure	35 bar
Approval	BIS

Suitable for 'A & B' Class Fire Paper, Wood, Paints, Gases, Chemical, Petrolium Product

DRY POWDER TYPE FIRE EXTINGUISHER (AVAILABLE IN CARTRIDGE TYPE)



PERFORMANCE DATA		
Fire Extinguisher Capacity	6 kg	9 kg
Minimum Period for which throw of Jet maintained	20 sec	25 sec
Minimum Period to Discharge at least 90% of contests	25 sec	30 sec
Range of Jet	4 mtr.	6 mtr.
Empty Wt. (Approx)	5.2 kg	7.05 kg
Full wt. (Approx)	11.2 kg	16.05 kg
Fire Rating	3A, 34B	4A, 34B
Working Pressure	15 bar	15 bar
Hydro Pressure	35 bar	35 bar
Brusting Pressure	55 bar	55 bar

Suitable for all Flammable Liquids, Gases, Machinery Fires, Electrical Fire

Trolley Mounted Mechanical Foam Fire Extinguisher



PERFORMANCE DATA	
Fire Extinguisher Capacity	50 ltr.
Minimum Period for which throw of Jet maintained	40 Sec
Minimum Period to Discharge at least 90% of contests	180 Sec
Range of Jet	10 mtr.
Empty Wt. (Approx)	35 kg.
Full wt. (Approx)	80 kg.
Working Pressure	15 bar
Hydro Pressure	35 bar
Brusting Pressure	45 bar

Trolley Mounted Water Type Fire Extinguisher



PERFORMANCE DATA	
Fire Extinguisher Capacity	50 ltr.
Minimum Period for which throw of Jet maintained	60 Sec
Minimum Period to Discharge at least 90% of contests	180 Sec
Range of Jet	10 mtr.
Empty Wt. (Approx)	35 kg.
Full wt. (Approx)	80 kg.
Working Pressure	15 bar
Hydro Pressure	35 bar
Brusting Pressure	45 bar

ABC Modular Type Fire Extinguisher





SPECIFICATION		
Model	ABC 5 kg.	ABC 10 kg.
Media	Map Powder	Map Powder
Capacity	5 Kg.	10 Kg.
Area Coverage	3m² approx	3m² approx
Test Pressue	30 bar	30 bar
Anti-Corrosive Treatment	Powder Coated	Powder Coated
Shell Diameter	230 mm	300 mm
Overall Height	350 mm	350 mm
Gross Weight	9.5 kg.	16 kg.
Bulb Treatment	68°C	68°C
Changed Pressure	15 bar	15 bar
Mounting	Celling/wall/Mount/type	Celling/wall/Mount/type

Chrome Elbow Type Hose Reel Drum



Features

Leakage Resistance
Premium Quality
Durability & Corrosion Free

Dimensions

Plate Thickness : 0.8 mm
Diameter : 490 mm Hub
Distance : 165 mm

General Data

Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 3/4" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle

Material of Construction	
Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Mild Steel IS:513
Slide Plates	Mild Steel IS:513
Hose Reel Tubing	Thermoplastic IS:12585
Elbow	Chrome Plated

Aluminium Elbow Type Hose Reel Drum



Features

Leakage Resistance
Premium Quality
Durability & Corrosion Free

Dimensions

Plate Thickness : 0.8 mm
Diameter : 540 mm Hub
Distance : 165 mm

General Data

Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 1" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle

Material of Construction	
Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Mild Steel IS:513
Slide Plates	Mild Steel IS:513
Hose Reel Tubing	Thermoplastic IS:12585
Elbow	Aluminium LM6

Aluminium Hose Reel Drum



Features
Leakage Resistance
Premium Quality
Durability
Corrosion Free


Dimensions
Plate Thickness : 18 & 20 Gauge
Plate Diameter : 540 mm
Hub Distance : 150 mm

General Data
Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 3/4" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle (Jet Spray type optional)
Reference : IS:884

Material of Construction

Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Aluminum
Hose Reel Tubing	Thermoplastic IS:12585
Shut-off Nozzle	Gunmetal IS:318 LTB2/ SS 304 Gr. I/PVC

S Type Hose Reel Drum

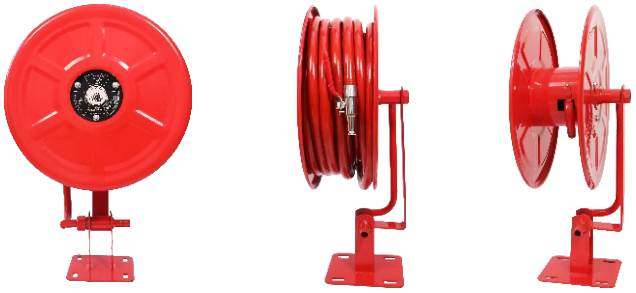

Features
Leakage Resistance
Premium Quality
Durability & Corrosion Free

Dimensions
Plate Thickness : 1 mm
Plate Diameter : 490 mm
Hub Distance : 200 mm

General Data
Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 3/4" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle (Jet Spray type optional)

Material of Construction

Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Mild Steel IS:513
Slide Plates	Mild Steel IS:513
Hose Reel Tubing	Thermoplastic IS:12585

ISI Hose Reel Drum



Features
Leakage Resistance
Premium Quality
Durability & Corrosion Free

Dimensions
Plate Thickness : 1 mm
Plate Diameter : 540 mm
Hub Distance : 230 mm

General Data
Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 3/4" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle (Jet Spray type optional)
Approval : IS 884:1985

Material of Construction

Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Gunmetal IS:318 LTB2
Slide Plates	Mild Steel IS:513
Hose Reel Tubing	Thermoplastic IS:12585

Regular Hose Reel Drum



Features
Leakage Resistance
Premium Quality
Durability & Corrosion Free

Dimensions
Plate Thickness : 0.8 mm
Plate Diameter : 490 mm
Hub Distance : 165 mm

General Data
Make : Ronak
Size / Model : Hose Reel (Swinging Type)
Inlet : 3/4" MBSP Threaded Connection
Outlet : Hose fitted with Jet type shut-off nozzle (Jet Spray type optional)

Material of Construction

Hub	Mild Steel IS:513
Side Rim	Mild Steel IS:513
Swivel Joint	Mild Steel IS:513
Slide Plates	Mild Steel IS:513
Hose Reel Tubing	Thermoplastic IS:12585

Thermoplastic Fire Hoses

IS:15683 : 2006 CM/L-2824662



Technical Specification

Material	:	Made up of high quality virgin Thermoplastic Compound.
Reinforcement	:	High pressure Nylon Yarn.
Bend Radius	:	Can work at a radius of 5 times to the nominal bore size as per BIS standard.
Working Temperature	:	It can work at 150°F for short term and for long term 110°F.
Impact Resistance	:	No break easily. Highly impact resistant material.
Chemical Resistance	:	Good resistance properties with most of chemicals. Fair to good. It is resistant to acid, alkali and almost all inorganic chemicals.
Fire Regarding Properties	:	Our high quality Thermoplastic Compound has inherently superior fire retarding properties due to its chlorine content. Its ignition temperature is as high as 455°C and is a material with less risk for fire incidents since it is not ignited easily. It is a self extinguishing material and dose not continue to burn. Therefore it is suitable for safety reasons. Available In: 30mtr & 60mtr
Size	:	12.5 mm X 25 mm

Ronak RRL Hose

CE IS:15683 : 2006 CM/L-2824662

Standard Length :
15 Mtrs, 22.5 Mtrs, 30 Mtrs & 75 Mtrs

End Connection :
As per customer requirements



Features :
Compact, Flexible & Light weight.
Abrasion resistance
Ability to with standard high operating & back pressure.
Reinforced Rubber Lined (RRL)
Unaffected with mild dew.

Hose :
RONAK RRL Hose (Reinforced Rubber Lined Hose) Conforming to IS :636/1988 Type-A ISI Marked

Application :
This RRL Hose is used for water delivery Purpose in Fire-Fighting & Civil Engineering Application etc.

Construction :

Jacket :
Circular woven jacket made from a special blend of cotton & synthetic yarn with high abrasion and heat resistance. Jacket is also treated with suitable rot proofing agent.

Reinforcement :
A thin fabric reinforcement bonded by a special adhesive.

Rubber Linning :
A rubber inner lining with suitable rubber compound which gives flexibility, durability & better ressistance.

Hose Boxes

IS:15683 : 2006 CM/L-2824662

Single Door



Specifications :

Material of Construction : M.S. Sheet 18 SWG to 20 SWG
Colour : Epoxy powder coated with PO Red inside and outside
Single Door Hose Box : For accommodating 1 No. 15 meter Hose and one nozzle
Three sizes available : 500 X 500 X 200, 430 X 430 X 200 & 480 X 420 X 170


Double Door



Specifications :

Material of Construction : M.S. Sheet 18 SWG to 20 SWG
Colour : Epoxy powder coated with PO Red inside and outside
Single Door Hose Box : For accommodating 2 No. 15 meter Hoses and one nozzle
Approximate size : 750mm x 600mm x 250mm


Fire Hose Delivery Coupling

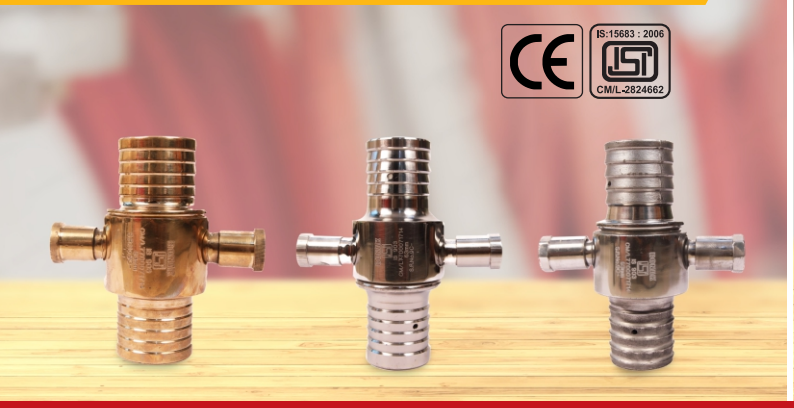

Gun Metal | Stainless Steel | Aluminium

Type of Material	Gun Metal	Stainless Steel	Aluminium
Body, Assembly	LTB2 - IS:318	Stainless Steel IS:3444	IS:617
Rubber Washer	IS:937 (Type-A)	IS:937 (Type-A)	IS:937 (Type-A)
Spring	Phosphor bronze Wire-IS:7608	Stainless Steel IS:6528	Stainless Steel IS:6528

Branch Pipe & Nozzle

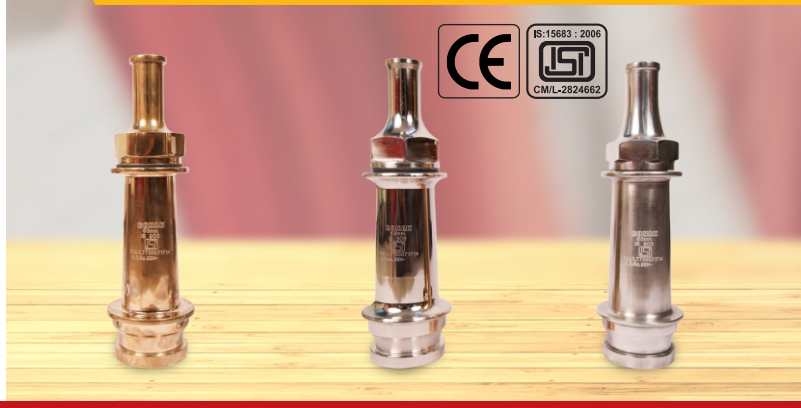

Gun Metal | Stainless Steel | Aluminium

Type of Material	Gun Metal	Stainless Steel	Aluminium
Body, Assembly	LTB2 - IS:318	Stainless Steel IS:3444	IS:617
Rubber Washer	IS:937 (Type-B)	IS:937 (Type-B)	IS:937 (Type-B)

Breeching Inlets



Two Way Breeching Inlet | Three Way Breeching Inlet | Four Way Breeching Inlet

General Data

Design Standard as per IS 904.
2 Nos Instantaneous Male Coupling with NRV
Large flow way area to get full flow of water.
Leakage proof by Spring loaded Non Return Valve.

Testing & Quality Control

Test Pressure Shell	21 kg/cm^2
Working Pressure	7 kg/cm^2
Maximum Working Temperature	110°C

Material of Construction

Body	Cast Iron to IS:210 Gr. FG 200
Non Return Valve	Gunmetal LTB-2 or Stainless Steel

Dimensions


	Inlet	Pitch Circle Diameter	Flange Size	No. of Holes
Two Way Breeching Inlet	150 mm NB Flanged Inlet	180 mm	OD - 210mm ID - 150mm	8 Holes of 23 mm Diameter
Three Way Breeching Inlet	150 mm NB Flanged Inlet	180 mm	OD - 220mm ID - 150 mm	8 Holes of 23 mm Diameter
Four Way Breeching Inlet	150 mm NB Flanged Inlet	180 mm	OD - 280mm ID - 150 mm	8 Holes of 23 mm Diameter

Landing Valve (Type A)



Gun Metal | Stainless Steel

Landing Valve (Type B)

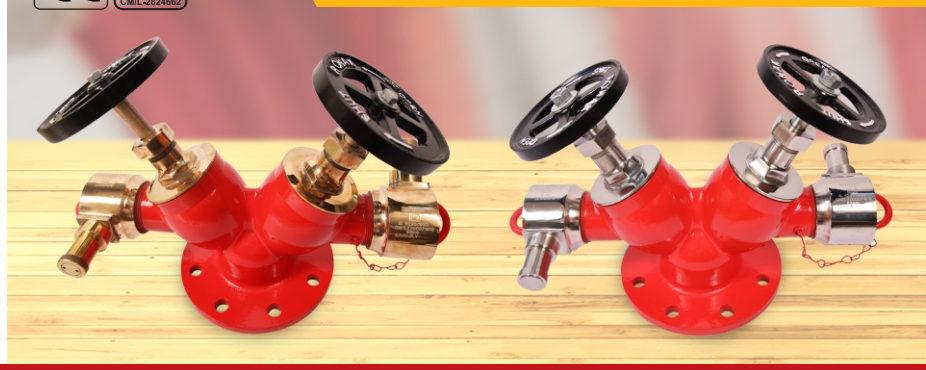

Gun Metal | Stainless Steel

Type of Material	Gun Metal	Stainless Steel
Body, Bonnet Assembly	LTB2 - IS:318	Stainless Steel IS:3444
Valve Spindle	Brass Rod - IS:319/320	Stainless Steel IS:6603
Cast Iron Wheel	IS:210	IS:210
Rubber Washer	IS:937 (Type-A)	IS:937 (Type-A)
Spring	Phosphor Bronze Wire - IS:7608	Stainless Steel - IS:6528
Gland packing - Asbestos Thread	IS:4687 (Type-3)	IS:4687 (Type-3)

Sprinklers



Side Wall Type | Upright Type | Pendant Type

Technical Specifications :

Temperature Heating	:	68°C
Glass Bulb Colour	:	Red
Thread Size	:	NPT 1/2”
Glass Bulb Diameter	:	5 mm
Max Service Pressure	:	175 psi

	Side Wall Type	Upright Type	Pendant Type
Outer Diameter	-	34 mm	31.8 mm
Inner Diameter	7.1 mm	7.1 mm	7.1 mm
Thickness	1 mm	1 mm	1 mm
Height	21.8 mm		
Width (1)	29.5 mm		
Width (2)	25.5 mm		

Performance Test :

Hydraulic Test - Tested at 21 kgf / cm^2

Flow Test - 1800 LPM at 7 kgf / cm^2

Finishing :

Natural & Chrome Plated



INSTRUCTION OF OPERATION

TYPE OF FIRE EXTINGUISHER		WATER TYPE	MECHANICAL FOAM	CARTRIDGE TYPE DRY CHEMICAL POWDER	STORED PRESSURE TYPE DRY CHEMICAL POWDER	CARBON DIOXIDE
PICTURE OF THE FIRE EXTINGUISHER						
CAPACITY & SPECIFICATION OF FIRE EXTINGUISHER		9 LTR IS: 15683:2018 50 LTR IS : 13385:1992	9 LTR IS: 15683:2018 50 LTR IS : 13386:1992	6KG, 9KG IS:15683:2018 25KG, 50KG, 75KG IS:10658:1999	1,2,4,6,&9KG IS:15683:2018	2,3,4.5 KG IS:15683:2018
METHOD OF OPERATION						
INSTRUCTION OF OPERATION		Remove the safety clip, strike hand on the knob & direct the discharge let of the base of fire.	Remove the safety clip, strike hand on the knob & direct the discharge let of the base of fire.	Remove the safety clip, strike hand on the knob & direct the discharge let of the base of fire.	Remove the locking pin press the valve handle and direct the discharge jet of the base of fire.	Remove the locking pin press the valve handle and direct the discharge jet of the base of fire.
EXTINGUISHING AGENT PRINCIPAL OF EXTINGUISH		Water Cooling	Mechanical Foam Blanketing	Dry Chemical Powder Blanketing	A, B,C Blanketing	Carbon Dioxide Gas Blanketing
Case of Fire	Suitable in fire involving	A	A & B	B C D & E	A B C & E	B C & E
A SOLID	Oganic Material i.e.Wood Paper rubber & plastic	✓ YES	✓ YES	✗ NO	✓ YES	✗ NO However can be used on small suitable fire
B LIQUID	Flammbble Liquid Petroleum products paints Chemicals etc.	✗ NO	✓ YES	✓ YES	✓ YES	✓ YES
C GAS	Petrolium products Plastis, Flammable Gases & Electrical Fire etc.	✗ NO	✗ NO	✓ YES	✓ YES	✓ YES
D METAL	Flammbble Metals i.e. Magnesium Sodium Potassium etc.	✗ NO	✗ NO	✓ YES ONLY SPECIAL POWDER	✗ NO	✗ NO
E ELEC	ElectricalAppliances	✗ NO	✗ NO	✓ YES	✓ YES	✓ YES

RONAK FIRE INDIA PVT. LTD.

Plot No.62 & 63, S.No.984, Old Satpari Road, Behind Anand Arc, Village Shirgaon, Palghar (W), Dist.Palghar - 401404, Maharashtra

Contact No.: 9323947512 / 8104039710 / 9004070460 / 9324532889

Email: ronak.fireindia@gmail.com / info@ronakfire.com

Website: www.ronakfire.com