

PRAMAN compliance report


core-rtr-01 — audited against CIS, DISA_STIG. Verdicts are deterministic; no language model contributed to any result or command in this document.

Device identity

[illegible]

Compliance posture

Compliance score

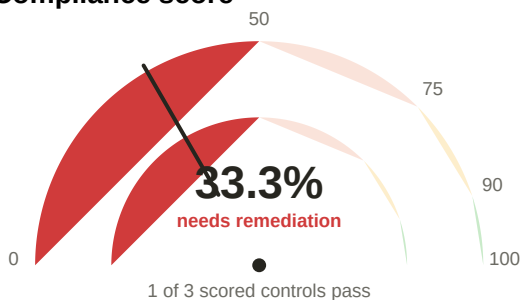

Measure	Value
Score	33.3%
Band	needs remediation (0-50%)
Pass	1
Fail	2
Scored controls	3


33.3% (needs remediation) — 1 pass, 2 fail across 3 scored controls.

Scored controls are those selected for this device and applicable to it. Controls with no automated check are counted as notchecked and excluded from both numerator and denominator, so the score never improves by failing to look. The bands are PRAMAN's own presentation thresholds, not a publisher grade: CIS and DISA rate individual controls, and neither certifies a device by score.

Basis: score = pass / (pass + fail) over automated checks; notchecked, notapplicable and unknown are excluded from the ratio.

3 controls evaluated; 3 carried a verdict. Excluded from the ratio: 0 not checked, 0 not applicable, 0 indeterminate, 0 in error.

All results, including the non-verdicts

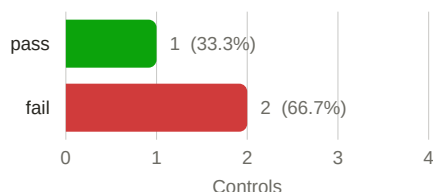


Result	Controls	Share
pass	1	33.3%
fail	2	66.7%

3 control(s) evaluated for this device.

Only pass and fail enter the compliance score. notchecked means no automated check exists yet; unknown means the check ran and the evidence was insufficient. Neither is a pass.

Pass and fail by framework

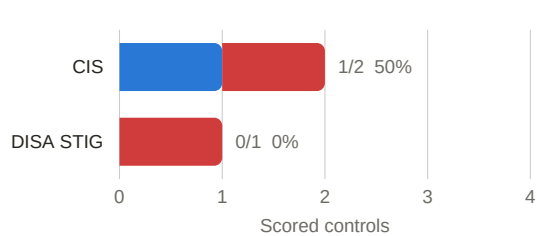


Framework	Pass	Fail	Pass rate
CIS	1	1	50%
DISA STIG	0	1	0%

Bar length is the number of scored controls per framework; the red segment is the failures.

NIST SP 800-53 and ISO 27001 results are projected: a control is satisfied when every contributing CIS or STIG check passes, and indeterminate when any contributor is unknown.

Severity of failures

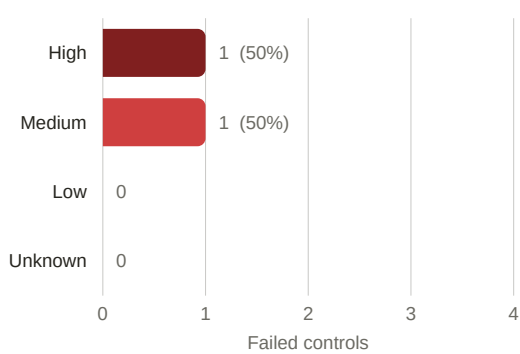

Severity	Failures	Share
High	1	50%
Medium	1	50%
Low	0	0%
Unknown	0	0%

2 failing control(s), by the publisher's severity rating.

Unknown is not a low severity: it means the publisher rated the control and this benchmark did not carry the rating through, so it needs a human decision rather than a default.

A trend needs at least two committed audits of this device; the ledger holds 1.

Findings

2.1.1.1.2 Configure domain name

CIS · CIS Cisco IOS 15 v4.1.1

[!] FAIL

[!!] MEDIUM SEVERITY

ip domain-name is not configured, so the switch is reachable only by address.

Also satisfies: NIST SP 800-53 CM-6

Evidence

Canonical path	Observed	Source	Parser
line.mgmt.domain_name	not present in configuration	core-rtr-01.conf	patterns.cisco_ios@1

Remediation

Note. These commands are templates, not ready to paste: replace {domain-name} with values for this device first.

Note. Publisher's stated impact: Organizations should plan the enterprise network and identify an appropriate domain name for the router.

Configure an appropriate domain name for the router. hostname (config)#ip domain-name {domain-name}

#	Mode	Command as it appears on this device
1	config	core-rtr-01(config)#ip domain-name {domain-name} ← substitute first

Source	CIS Cisco IOS 15 v4.1.1, control 2.1.1.1.2 — CIS_Cisco_IOS_15_Benchmark_v4.1.1_ARCHIVE.pdf
Risk of applying	not rated by the publisher -- assess against this device's role before applying

V-215823 Router must be configured to require authentication for remote OSPF LSA.

DISA_STIG · Cisco Router NDM STIG V3R7

[!] FAIL

[!!!] HIGH SEVERITY

No authentication configured under router ospf.

Evidence

Canonical path	Observed	Source	Parser
ospf.authentication	none	core-rtr-01.conf:214	patterns.cisco_ios@1

214: network 10.0.0.0 0.0.0.255 area 0

Remediation

Note. No published remediation is available for this control in the built catalogs, and the playbook has no entry for it. Consult the benchmark document directly. This is a gap in PRAMAN's coverage, not a statement that the finding needs no action.

1.1.1 Set transport output to ssh

CIS · CIS Cisco IOS 15 v4.1.1

[+] PASS

[!] LOW SEVERITY

transport output ssh is configured.

Evidence

Canonical path	Observed	Source	Parser
line.vty.transport_output	ssh	core-rtr-01.conf:118	patterns.cisco_ios@1

118: transport output ssh

Verification

These values are printed in full and unabbreviated. Recompute the record hash over the ledger row's canonical JSON, or verify the signature against the published Ed25519 public key, to confirm this report describes an unaltered audit. The findings and the canonical facts they were read from are embedded in this PDF as attachments.

[illegible]