

Davis & Shirtliff

Industrial Area, Dundori Road, Nairobi
P.O. Box: 41762-00100, Kenya
+254 020 6968 000, +254 711 079 200
contactcenter@dayliff.com
www.davisandshirtliff.com

Thursday, 02nd Sep 2021

Bustani Water Towerr

Bustani Water Towers

Mithikwani, Kwa-Mutonga, Kabati, Kitui County, Kenya, PQCW+CJ

info@dayliff.com

254711079000

Please search for the customer below and fill in the details below before proceeding.


Paramaters									
Location	Mithikwani, Kwa-Mutonga, Kabati, Kitui County, Kenya, PQCW+CJ(-1.2789129746234726, 37.79651075230709)								
Required Daily Output	10 m ³	Pipe Type		Motor Cable	m	Pipe Length & Inner Diameter	m, "	Head (TDH)	150m

Product	Quantity	Details
Pump - DSP 3/32	1	Suitability 82.37% , Efficiency 56.57%
Inverter - SV3/3.7M	1	
Panels - YL330	9 x 1	1 string(s) each with 9 Solar panels.
Motor Cable	Length , Cross Sectional Area 2.5mm²	
Other Accessories		
Water Level Switch / Well Probe	1	
Water Level Sensor Cable	2 Core x 1.0mm ² , Length -	
PV Disconnect	1	DAYLIFF 2ST 1000V/16A PV Disconnect Switch
Earthrod c/w Clamp	1	
6mm² DC Cable for Earthrod	(As required)	
Daily output in average month - 10.91		

Monthly Irradiation Data

Direct Normal Irradiation


Source: NASA.gov POWER Single Point Data Access

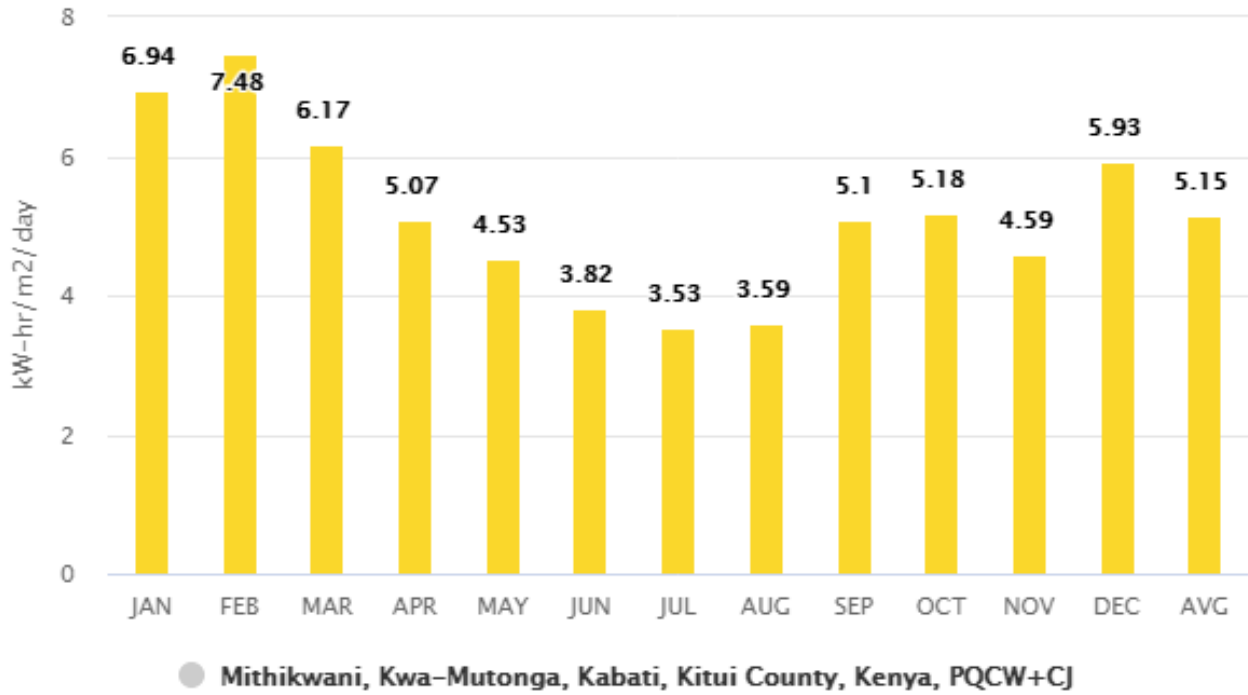

Irradiation [kWh/m²]	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Avg
	6.94	7.48	6.17	5.07	4.53	3.82	3.53	3.59	5.1	5.18	4.59	5.93	5.15

Monthly Output Data



Output – Mithikwani, Kwa-Mutonga, Kabati, Kitui County, Kenya, PQCW-

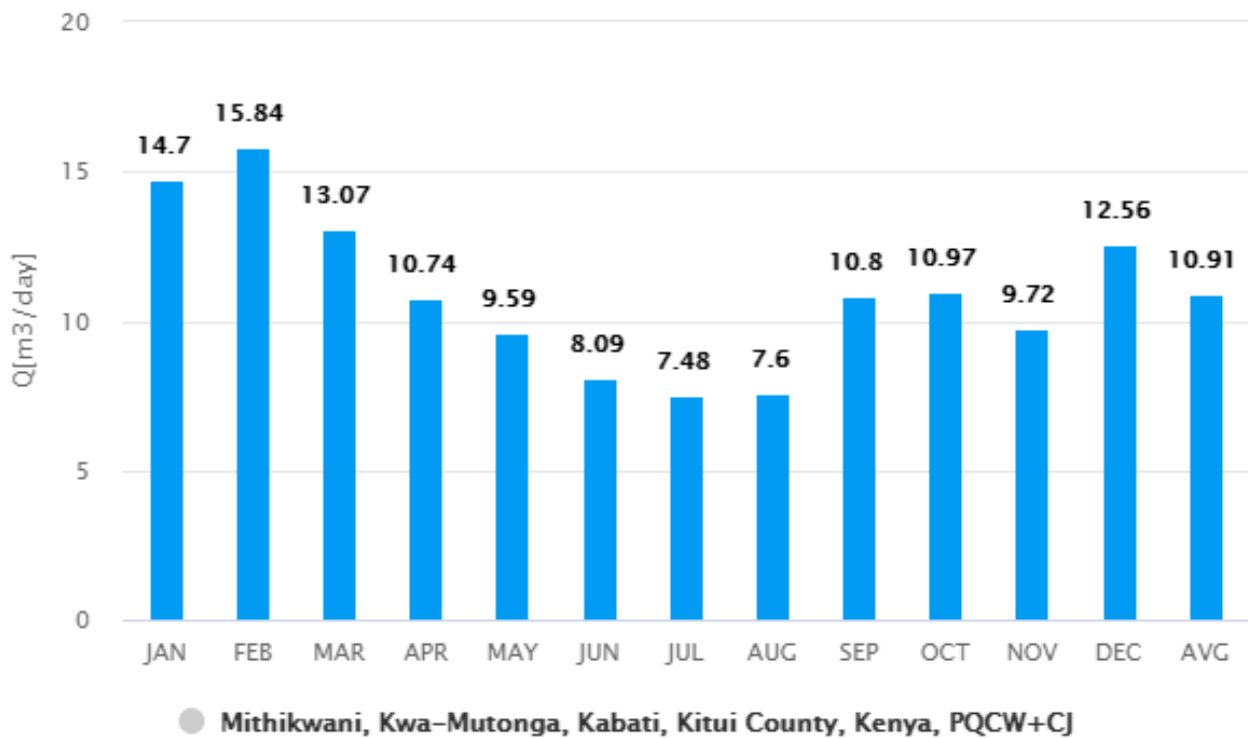


Output [m³/day]	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Avg
-----------------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

14.7	15.84	13.07	10.74	9.59	8.09	7.48	7.6	10.8	10.97	9.72	12.56	10.91
------	-------	-------	-------	------	------	------	-----	------	-------	------	-------	-------

Pump & System Curves

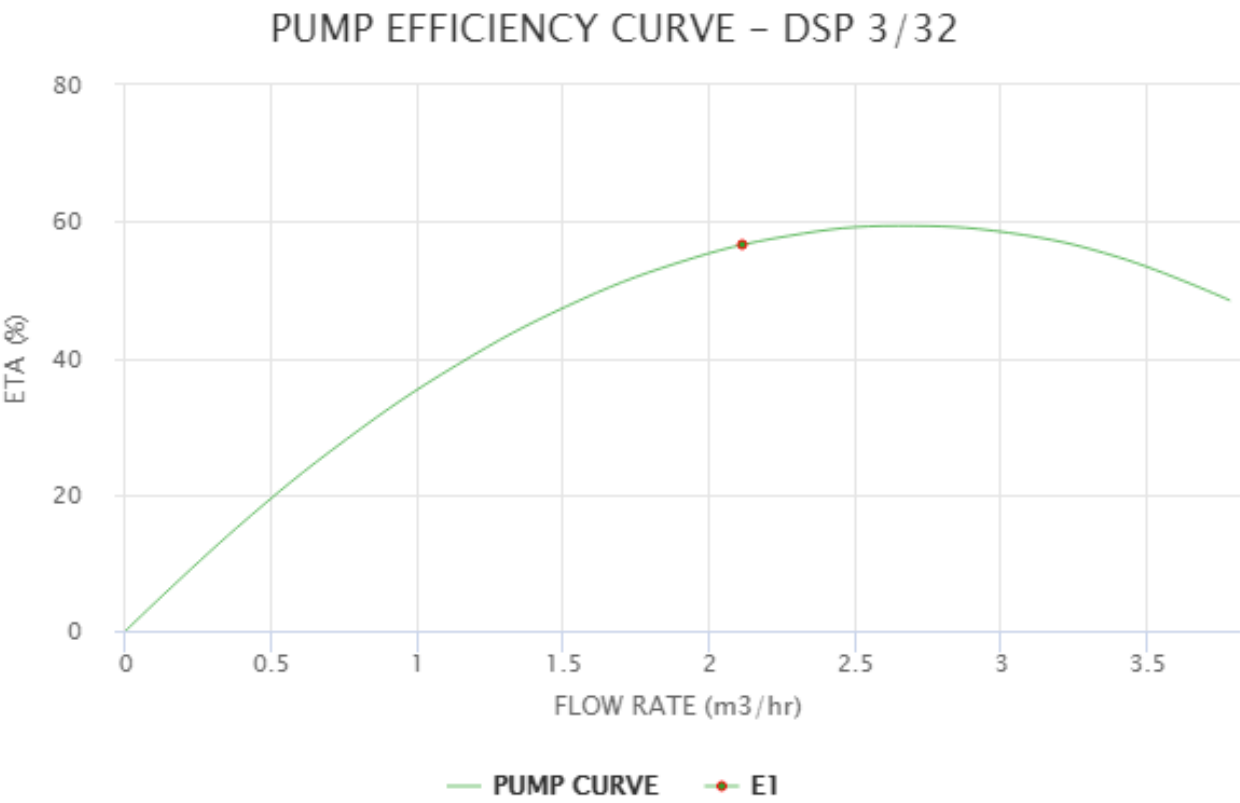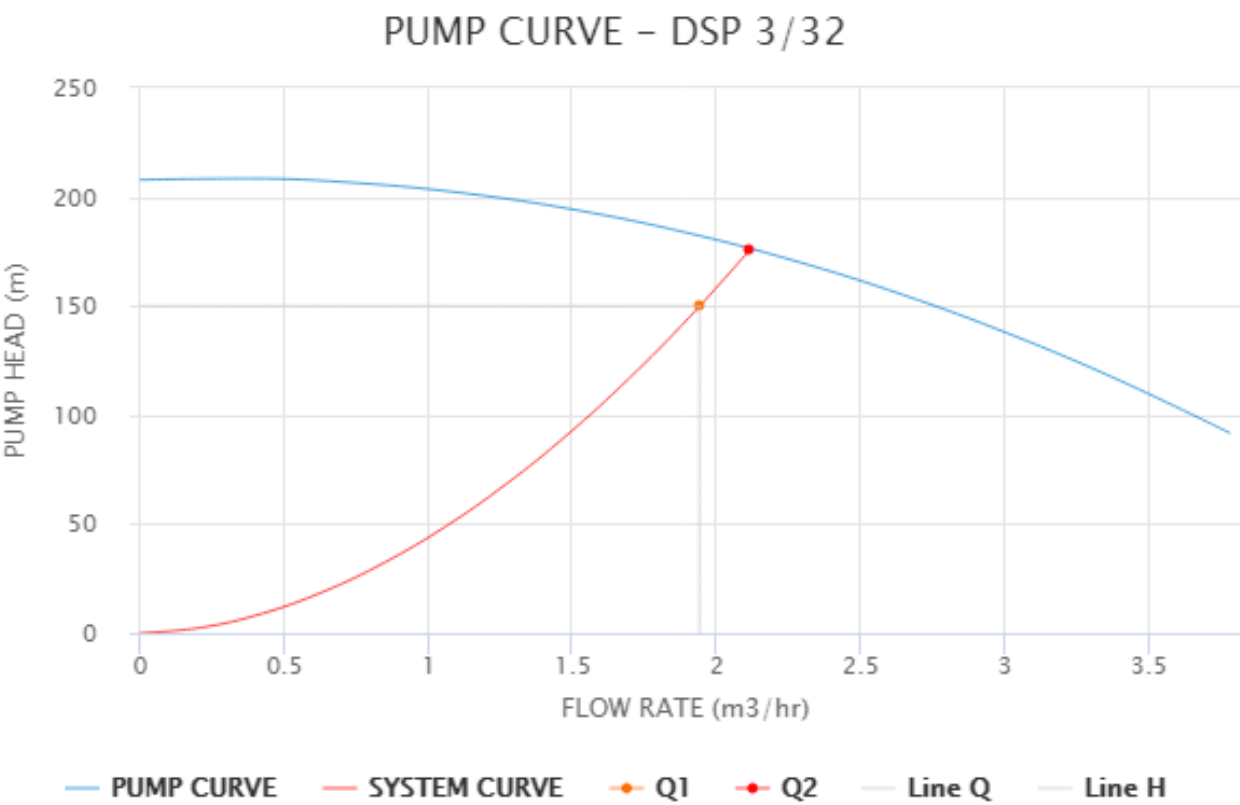

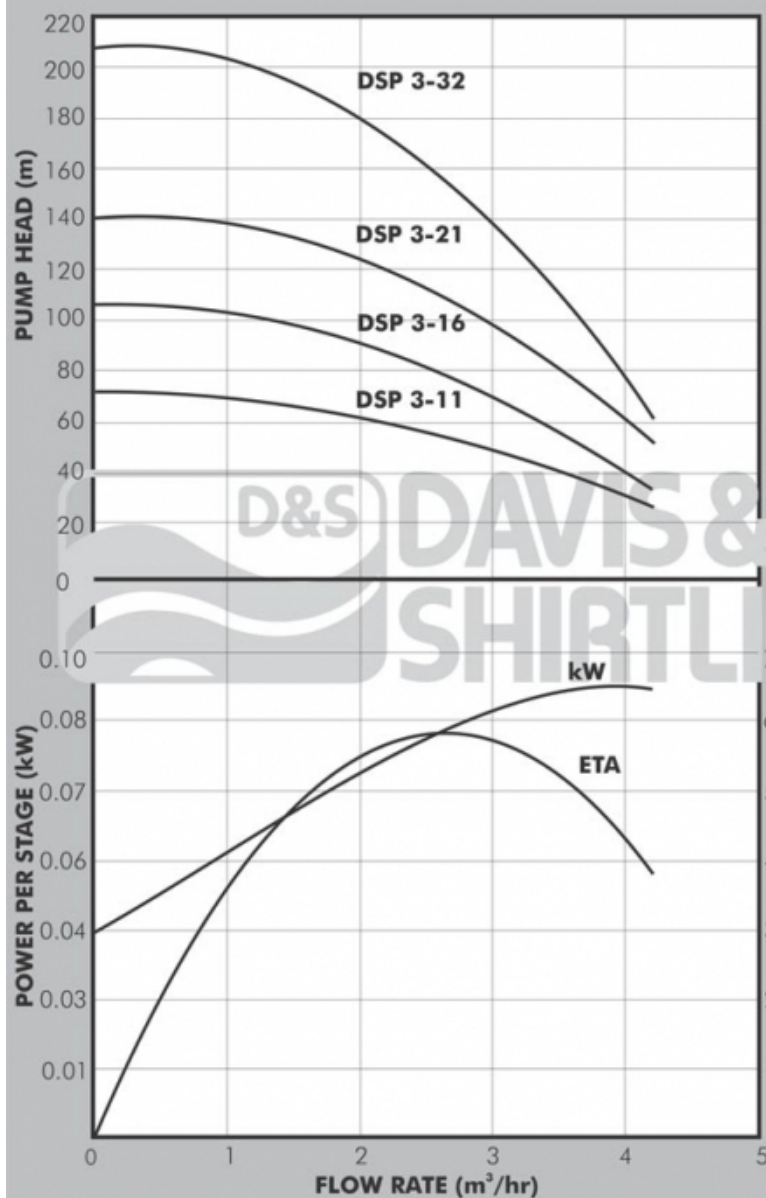

The DAYLIFF DSP range of submersible multistage centrifugal pumps are specially designed for borehole supply applications. Material of construction include noryl impellers, glass filled polycarbonate diffusers, stainless steel inlet and outlet chambers, stage casings, shaft and pump housing. These quality materials together with the floating type impeller design provide the pumps with efficient performance ,excellent sand handling capabilities and long life.

MOTOR

The pump is coupled to a two pole sealed motor constructed principally from stainless steel. Single phase motors are supplied with a separate control unit that incorporates an isolator, run indicator light, thermal overload protection and starting capacitor which can be connected directly to the mains power. The box is also provided with auxiliary terminals for control probes, pressure switch or float switch. Three phase motors require a remote DOL starter; a DAYLIFF electronic pump controller is recommended for comprehensive pump control including wireless low level protection, motor overload and voltage fluctuation.

Enclosure Class: IP68

Insulation Class: F

Speed: 2900rpm

OPERATING CONDITIONS

Pumped liquid: Thin, clean, chemically non aggressive liquids with a max. sand content of 50g/m³.

Max. Water temperature: +35°C

Max. immersion depth: 200m


Min. borehole diameter: 110mm

PUMP DATA

Model	Voltage (V)	Power		Current (A)	I _{start} /I	DN (")	Dimensions (mm)			Weight (kg)
		kW	HP				A	C	D	

DSP 3-11	1x240	0.75	1	4.3	4.7	1¼	342	98	722	21
	3x415			2.3	3.9				707	20
DSP 3-16	1x240	1.1	1.5	8.1	4		430		835	24
	3x415			3.1	3.9				810	22
DSP 3-21	1x240	1.5	2	10.4	3.7		519		959	28
	3x415			4	3.5				924	25
DSP 3-32	1x240	2.2	3	15	3.1		749		1244	35
	3x415			5.6	3.9				1189	30

SV3/3.7M

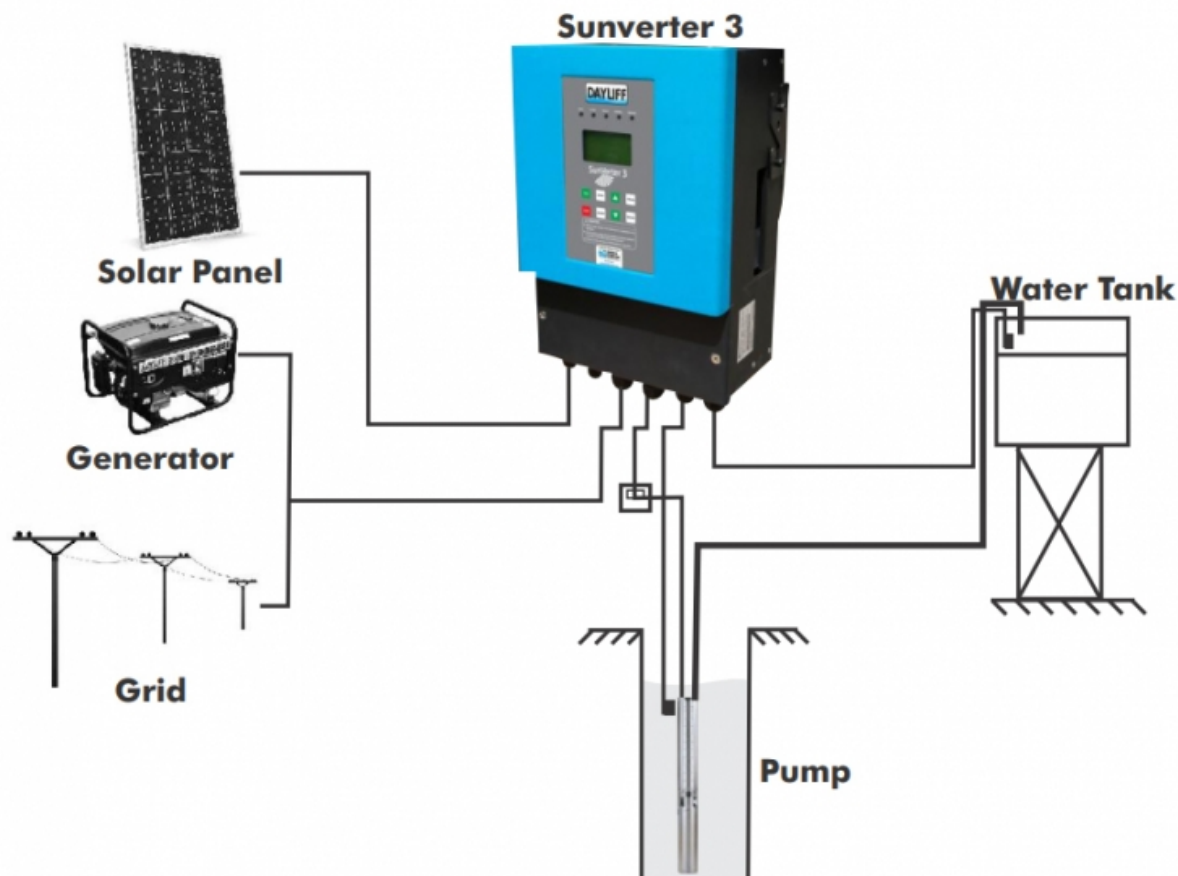

Dayliff Sunverter 3 is the latest update of the established Sunverter range of advanced AC/DC inverters specially designed for solar-powering AC motors in various water pumping applications. As well as a general upgrade of the electronics and functionality an important new feature is hybrid capability that enables concurrent operation with direct AC power from mains or generator supply while prioritising solar supply. It is adaptable to all AC motor types and can be retro fitted to existing AC supply installations in solarisation projects. Particular features include;

- Hybrid capability with the option of DC solar power, generator or mains grid power inputs
- Patented MPPT (Maximum Power Point Tracking) capability providing fast response, good stability and up to 99% efficiency.
- Fully automatic operation with up to 8 years storage capacity of operating data.
- Supports motor soft start and gives full motor protection
- User friendly LCD display interface with comprehensive display information
- Integral remote monitoring and control capability activated by installing a registered Sim Card with data plan or alternatively signing up to the unique iDayliff Service
- Strong IP65 rated enclosure for enhanced component protection

CONTROLLER FUNCTIONALITY

The controller offers the following control functions:

- Settable minimum and maximum frequency and open circuit voltage.
- Display of operating parameters including frequency, voltage, amperage, input power and pump speed.
- Display of historical data including energy generation, maximum power and operating times.
- Protection against over and under voltage, over current, system overload and module over temperature.
- Fault detection with error code display.
- Selectable hybrid modes that prioritise solar supply as well as maximise output through optimal blending of both power supplies

INSTALLATION

Dayliff Sunverter 3 controllers are surface mounted and should be provided with a housing for water and heat protection. They must also be provided with a circuit breaker between the PV modules and controller. Due to the high operating voltages proper earthing is essential, which must be done by a qualified electrician. As a rule, all PV powered solar pumping systems should be provided with a solar module array with a nominal output about 30% greater than the motor size. In hybrid applications, higher array MPP voltage is specified to allow achievement of larger solar supply share of hybrid power supply. The arrays should be wired in a combination of series and parallel connections to ensure that the correct voltage is available into the inverter. It is important that the connection arrangement is approved by the pump supplier.

OPERATING CONDITIONS

Enclosure Class: IP65 Ambient

Temperature: -20°C to 60°C

Relative Humidity: 0-95%

Frequency: 0-60Hz

Model	Motor Rated Power (kW)	Rated Voltage	Output Current (A)	Max DC Input Voltage VDC	MPP Voltage VDC, Solar	MPP Voltage VDC, Hybrid	Dimensions (mm)			Weight (kg)
							H	W	D	
SV3/1.5M	1.1	1x240V	8.6	450	150-360	150-370	416	257	158	8.5
SV3/2.2M	1.5		11							
SV3/3.7M	2.2		17							
SV3/3.7T	3.7	3x415V	9	850	500-700	600-700	458	300	175	8
SV3/5.5T	5.5		13							
SV3/7.5T	7.5		18							
SV3/11T	11		24							11.5
SV3/15T	15		30							
SV3/18T	18.5		39							
SV3/22T	22		45							

YL330

The heart of all effective photovoltaic systems is an efficient and reliable solar module and there are none better than Dayliff PV Modules. All are sourced directly from leading global PV module manufacturers who comply with the highest standards of quality and durability and offer the following features:-

- High efficiency multi crystalline solar cells with minimum 15% energy conversion rates to provide maximum power even at low irradiation levels
- High transmission rate tempered glass with an anti-reflection coating to increase the power output and provide mechanical strength.
- Multi function water proof junction box for easy connection.
- 25 year power output warranty.
- Global Certification.

Modules are sourced from world leading PV module manufacturers principally Yingli, Topray and Amerisolar who are all large scale vertically integrated manufacturers that process from silicon production to module assembly to ensure consistently high quality levels. Module types are recognized as quality products and are internationally certified by TUV Rheinland to ISO, CE and IEC standards as follows.

All Dayliff modules are manufactured to the highest standards and are guaranteed to provide reliable performance over long life spans. They are quality products in terms of both technology and performance and are ideal power sources for all types of solar applications.

THERMAL CHARACTERISTICS

Nominal Operating Cell Temperature: 46+/-2°C

Temperature Coefficient Pmax: - 0.45%/°C

Temperature Coefficient Voc: - 0.37%/°C

Temperature Coefficient Isc: 0.06%/°C


PV MODULE DATA

Model	Rated power (W)	Nominal Voltage (v)	Peak Voltage (v)	Open Circuit Voltage (v)	Short Circuit Current (A)	Number of Cells	Dimensions (mm)						Weight (kg)
							A	B	C	D	E	F	
SL20	20	12	18	21.6	1.2	36	496	495	296	350	100	23	1.98
SL40	40	12	18	21.6	2.5	36	665	665	316	516	100	25	3.7
SL50	50	12	18	21.6	2.9	36	667	665	467	588	100	25	4.25
SL60	60	12	18	21.6	3.7	36	689	667	467	665	100	25	5.35
TPS85	85	12	17.6	21.6	4.9	36	759	664	599	637	80	25	6
TPS100	100	12	17.8	21.2	6	72	1006	664	646	626	180	35	7.3
TPS125	125	12	17.5	21.5	7.4	36	1179	664	899	626.4	140	35	9
TPS150	150	24	36	43.2	4.45	72	1486	664	1206	626.4	140	35	11.5
TPS200	200	24	36	44.5	5.7	72	1316	992	1036	954.4	140	35	13.7
YL275	275	24	31	37.8	9.36	60	1650	992	990	948	330	35	18.5

AS285	285	24	31.8	39	9.48	60	1640	992	640	942	500	35	18
YL330	330	24	37.4	46.4	9.29	72	1960	992	1300	948	330	40	22
AS340	340	24	37.7	46.3	9.52	72	1956	1002	956	942	500	40	21
AS400Mono	400	24	41.2	49.6	10.25	144	2008	1002	1008	952	500	40	22

Data is given at Standard Test Conditions: Irradiance 1000W/m², spectrum AM 1.5 and 25°C cell temperature
 *Polycrystalline else Multicrystalline

Wiring Diagram

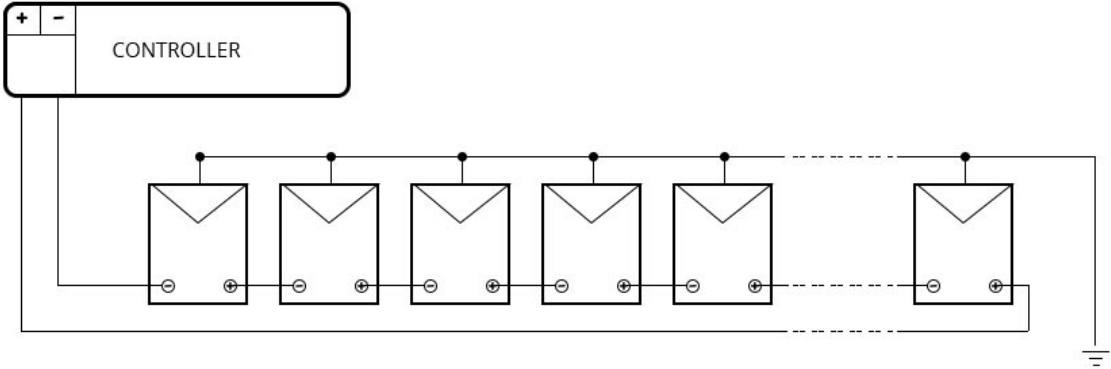

9 panels by 1 string(s)



Scan with the Dayliff App