

2-Wire to 4-Pin Pool Light Retrofit


Field Assembly Plug Harness Kit - 2-Wire (64-EGCPB-SWH-2W)

Introduction

When retrofitting an older two-wire pool light installation and making a connection to a new PAL pool light, it is important to understand the connection requirements between legacy pool light cabling and the modern PAL plug-and-play system. Existing pool/wiring installations may utilize a traditional two-wire cable, while current PAL pool lights are equipped with a 4-pin waterproof connector. In these situations, a Field Assembly Plug Harness Kit – 2-Wire (64-EGCPB-SWH-2W) is required to adapt the existing/old two-wire wiring to the new PAL four-wire fixture. This solution allows installers to reuse the existing two-wire pool light cable and conduit, eliminating the need to pull entirely new wiring while still providing a secure, watertight connection to the new PAL light.

Details

A Field Assembly Plug Harness Kit – 2-Wire (64-EGCPB-SWH-2W) is required when retrofitting an existing 2-wire pool light installation with a new PAL pool light that uses a 4-pin connector. During installation, the existing 2-wire pool light cable is cut and sealed into a field plug housing by filling it with epoxy and it is then connected to the back of the supplied female 4-pin adapter plug. Although this connector has 4 pins, only two power pins will provide power to the light, which matches the requirements of the light. The female adapter then connects to the included male-to-male harness cable, which provides the interface between the existing wiring and the new PAL light. The opposite end of the harness plugs directly into the PAL pool light fixture, creating a secure, watertight, plug-and-play connection. This retrofit method allows the existing conduit and two-wire cable to remain in place, eliminating the need to pull new wiring through the conduit.

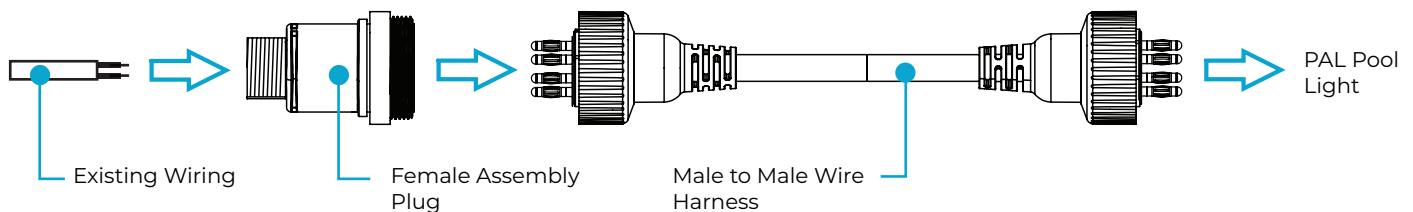

Connection of Existing 2-Wire Cable to Female Assembly Plug




Important!


This light should be installed by a qualified installer (e.g. pool builder and/or qualified electrician).
Ensure all power is completely shut off at the transformer/breaker before starting.

A

Cut the end off the old, existing light and strip the wire ends to expose bare wires. Insert the existing 2-wires into the female assembly plug and secure the wire in place with the screw for that socket.

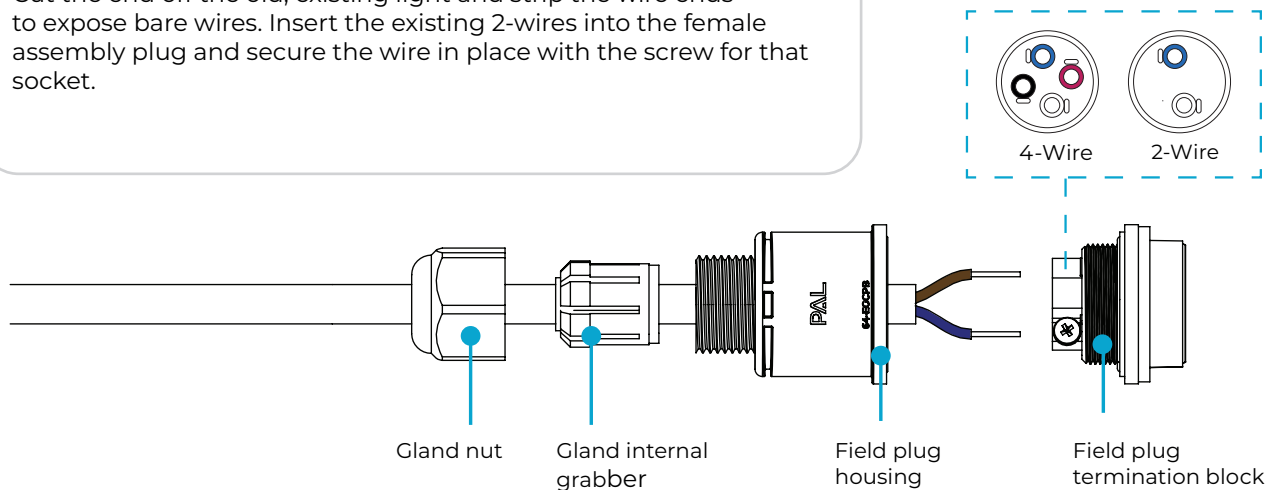

B

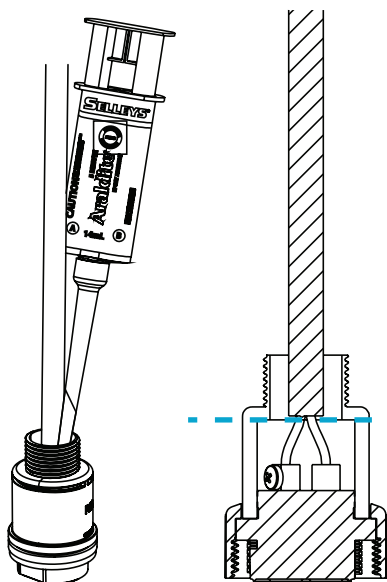

Fill housing up to top of main section using supplied epoxy (Araldite).


Fill to this point.

CAUTION: DO NOT FILL BEYOND THIS POINT.

C


Push gland internal grabber into top of plug housing and screw on gland nut to secure cable onto plug housing.

DO NOT OVER TIGHTEN

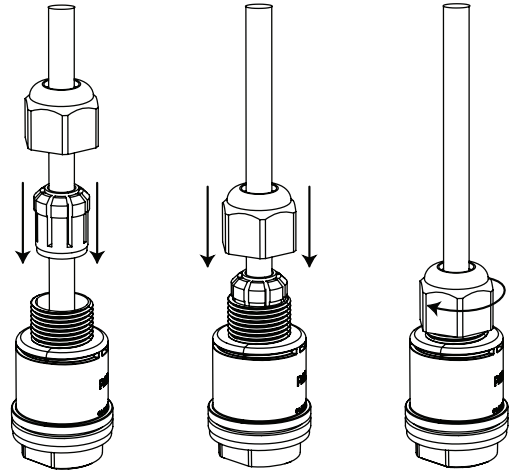

D

Connect the female plug to the male-to-male harness, tighten in place. Connect other male plug end connection to pool light.

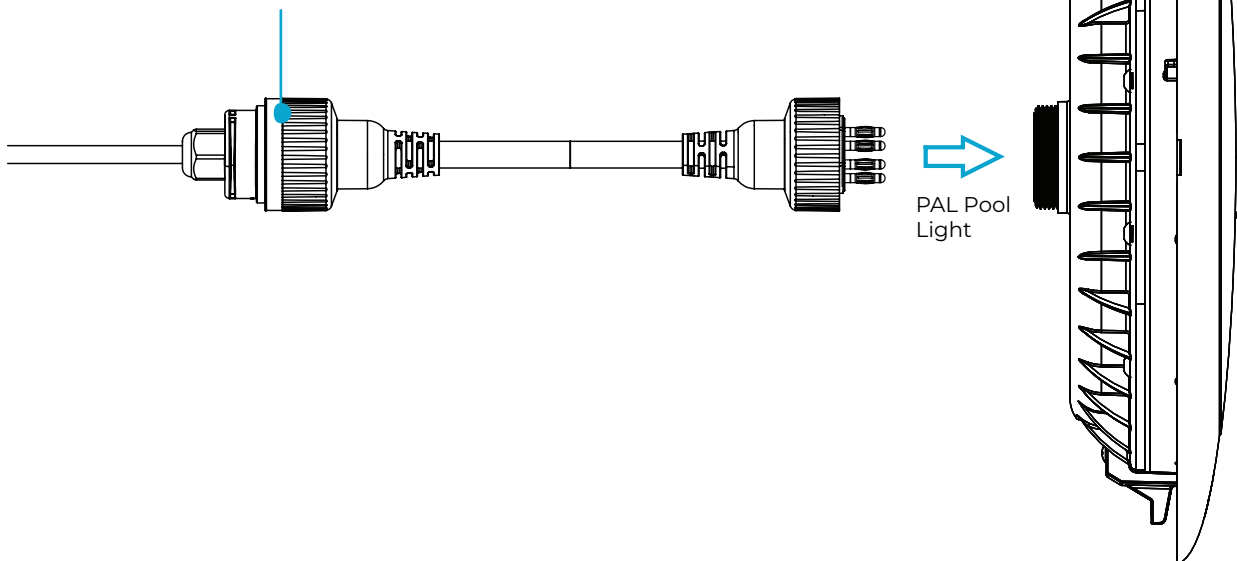

Item Number & Description

Item Description	Item Number
1 x Field Assembly Plug Harness Kit for 2 Wire Lights Only	64-EGCPB-SWH-2W