

Project Name:

Qty:

Type:

Product Number:

FEATURES

- Outdoor - Water resistant
- Instant color change
- DMX controllable
- RGB
- UL listed for pool use
- Smart-home compatible

QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max. length:
37 Lm/ft	RGB: Color changing	Standard: 24V DC	1" 25 MM	115' 35 M

Electrical:	Controls:	Lifespan:	Housing:	Bending Radius:
3 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 84,000 hr. @ 25° C	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" >60 MM

Optics:	Warranty:	Operating temp:	Certification	Remote Driver
113° beam angle	3 Year limited warranty.	-40°C to 50°C (-40°F to 122°F)	UL listed for pool use. IP68 and IK08 rated.	1 Zone / 2 Zone / 8 Zone 24V DC output 120-277V AC input - Wi-Fi and RF - IP 65 - UL Listed

ORDERING GUIDE

1: SERIES

64-PAL
SERIES
64-PAL PAL Lighting lighting product

2: FORM

NFLS8
LUMINAIRE TYPE
NFLS8 LED Strip - Large - Side bending

3: OUTPUT

RGB
COLOR/CCT
RGB RGB - 4-Wire

4: CABLE*

CUS
POWER CABLE
CUS Built to project need

5: LENGTH

STRIP LENGTH
Enter length needed in inches - up to 1" increments.

*Project details - please include cable entry specifics

REMOTE DRIVERS

ACCESSORIES

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones


MOUNTING TRACKS
64-PAL-NFLS-MT-E-6 6' PC mounting track for 64-PAL-NFLS LED strip

DISTRIBUTION



Downward facing

STRIP BEND




Side bending

WIRE




RGB
24V DC

DIMENSIONS

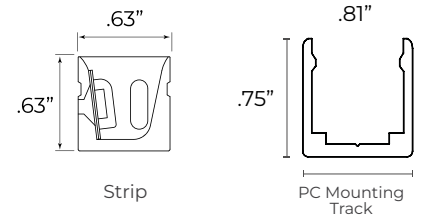

CABLE ENTRY OPTIONS




Rear entry



Straight entry



Side entry - Left




Side entry - Right

ORDERING EXAMPLE:

64-PAL-NFLS8-RGB-CUS-40

Photometry

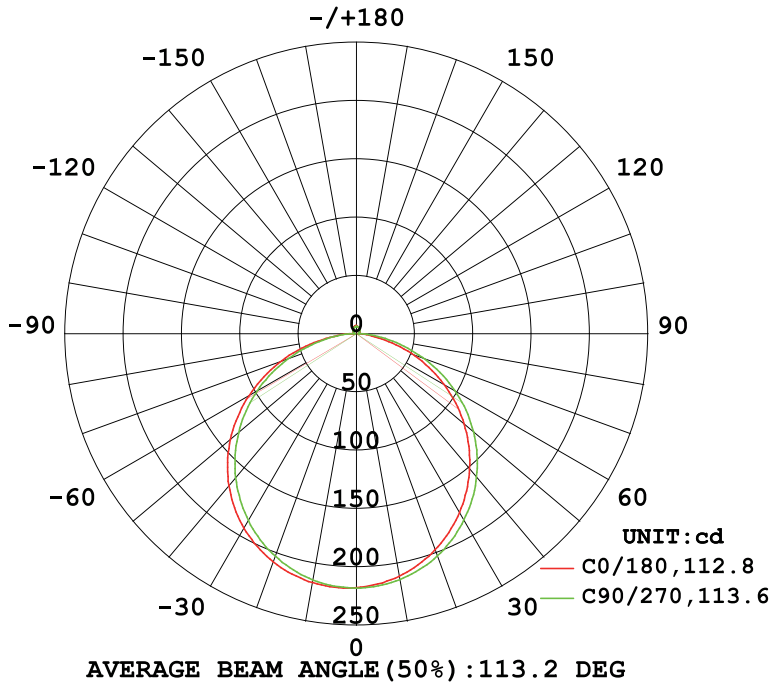

Light distribution

Flux out: 465.4 lm

Height	Eavg, Emax	Angle: 112.78deg	Diameter
1m	62.47, 218.31x		300.91cm
2m	15.62, 54.561x		601.81cm
3m	6.941, 24.251x		902.72cm
4m	3.904, 13.641x		1203.63cm
5m	2.499, 8.7301x		1504.54cm
6m	1.735, 6.0631x		1805.44cm
7m	1.275, 4.4541x		2106.35cm
8m	0.9761, 3.4101x		2407.26cm
9m	0.7712, 2.6941x		2708.17cm
10m	0.6247, 2.1831x		3009.07cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance

General Product Wiring

Individual driver boards may vary - please reference driver installation guides on www.pallighting.com

