

Project Name:

Qty: Type:

Product Number:

FEATURES

- ▶ Submersible under water
- ▶ Chlorine resistant
- ▶ DMX controllable
- ▶ RGB
- ▶ UL listed for pool use
- ▶ Smart-home compatible

DISTRIBUTION




STRIP BEND



WIRE



CABLE ENTRY OPTIONS




Rear entry



Straight entry




Side entry - Left




Side entry - Right

DIMENSIONS



Strip



PC Mounting Track

QUICK SPEC

Lumens	Color Output:	Voltage	Cutting increment	Max Length	Electrical
22 Lm/ft (72 lm/m)	RGB: Color changing	Standard: 24V DC	2" (50 mm)	66' (20 m)	2 W/ft (6.56 W/m)
Controls	Lifespan:	Housing:	Bending Radius	Optics	LED Density
Standard driver: On/Off	Standard: L70 > 60,000 hrs @ 77°F	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" (>60 mm)	114° beam angle	30 LEDs/ft (90 LEDs/m)
RF or WiFi driver: On/Off - dimming - color change - light shows through remote)	(L70 > 60,000 hr. @ 25° C)				
Operating Temp.	Certification	Housing	Remote Driver	Warranty	
-4°F to 122°F (-20°C to 50°C)	Standard: L70 > 60,000 hrs @ 77°F	UL listed for pool use. IP68 and IK10 rated.*	• 1 Zone / 2 Zone / 8 Zone • 24V DC output • 120-277V AC input • Wi-Fi and RF • IP 65 • UL Listed	3 Year limited warranty	
	(L70 > 60,000 hr. @ 25° C)	*IK10 rating applies only when custom tracks are approved by the PAL design team prior to installation.			

ORDERING GUIDE

1: SERIES

64-PAL
SERIES
64-PAL PAL Lighting lighting product

2: FORM

NFUS2
LUMINAIRE TYPE
NFUS2 LED Strip - Submersible - Side bending

3: OUTPUT

RGB
COLOR/CCT
RGB RGB - 4-Wire

4: CABLE*


CUS
POWER CABLE
CUS Built to project need

5: LENGTH

STRIP LENGTH
Enter length needed in inches - up to 1" increments.


*Project details - please include cable entry specifics

PHOTOMETRY

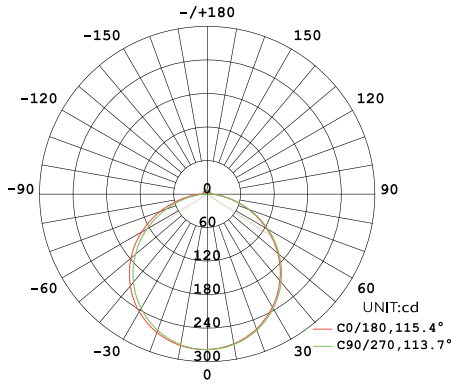

AVERAGE BEAM ANGLE(50%): 114.6°

Light distribution

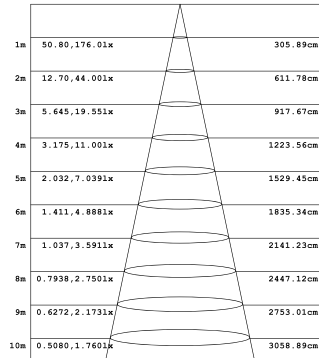

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance

ORDERING GUIDE - DRIVERS & ACCESSORIES

REMOTE DRIVERS

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones

ACCESSORIES

MOUNTING TRACKS

64-PAL-NFUS2-MT-E-3
3' (37.5") PC mounting track for 64-PAL-NFUS2 LED strip