

Project Name:

Qty: Type:

Product Number:

FEATURES

- ▶ Rigid track
- ▶ RGB
- ▶ Instant color change
- ▶ UL listed for pool use
- ▶ DMX controllable
- ▶ Smart-home compatible

QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max length:
55 Lm/ft (Without lens/ diffuser)	RGB: Color changing	Standard: 24V DC	2" 50.8 MM	33.3' 10 M


Electrical:	Controls:	Lifespan:	Housing:
3 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 84,000 hr. @ 25° C	Self-encapsulated design, FPC, high thermal 3M adhesive. PC Track and lens/ diffuser.

Optics:	Warranty:	Operating temp:	Certification
128° beam angle	3 Year limited warranty.	-20°C to 40°C (-4°F to 104°F)	UL listed for pool use. IP65 rated.

Remote Driver

- 1 Zone / 2 Zone / 8 Zone
- 24V DC output
- 120-277V AC input
- Wi-Fi and RF
- IP 65
- UL Listed



MITERED CORNERS




WIRE



DIMENSIONS

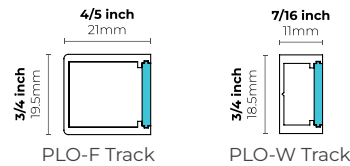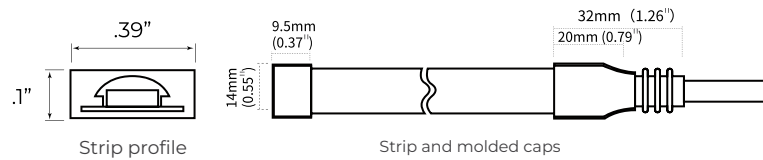

CABLE ENTRY OPTIONS



ORDERING EXAMPLE:

64-PAL-PLO2-F-RGB-CUS-80

1: SERIES

64-PAL
SERIES
64-PAL PAL Lighting lighting product

2: FORM

PLO		
LUMINAIRE TYPE		TRACK WIDTH
PLO2 LED Strip - encapsulated tape light		W 7/16" x 3/4" F 4/5" x 3/4"

3: OUTPUT

RGB
COLOR/CCT
RGB RGB - 4-Wire

4: CABLE

CUS
POWER CABLE
CUS Built to project need



5: LENGTH

STRIP LENGTH
Enter length needed in inches - up to 2" increments

REMOTE DRIVERS

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones

Photometry

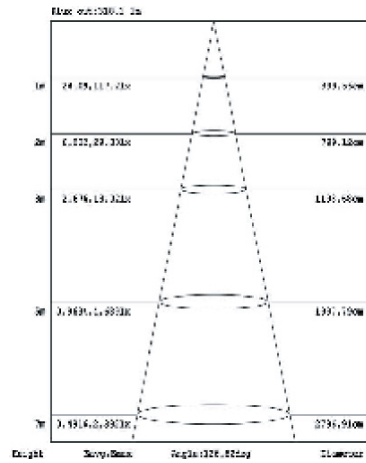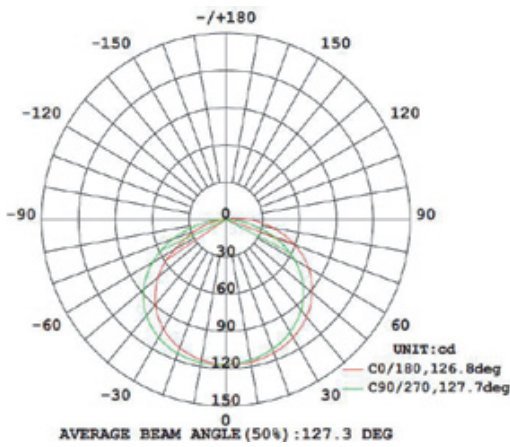

General Product Wiring

Individual driver boards may vary - please reference driver installation guides on www.pallighting.com

