

Project Name:

Qty: Type:

Product Number:

FEATURES

- Outdoor - Water resistant
- Instant color change
- DMX controllable
- RGB
- UL listed for pool use
- Smart-home compatible

QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max length:
50 Lm/ft	RGB: Color changing	Standard: 24V DC	1" 25 MM	115' 35 M

Electrical:	Controls:	Lifespan:	Housing:	Bending Radius:
3 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 60,000 hr. @ 25° C	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" >60 MM

Optics:	Warranty:	Operating temp:	Certification:	Remote Driver:
114° beam angle	3 Year limited warranty.	-40°C to 50°C (-40°F to 122°F)	UL listed for pool use. IP68 and IK08 rated.	1 Zone / 2 Zone / 8 Zone 24V DC output 120-277V AC input - Wi-Fi and RF - IP 65 - UL Listed

ORDERING GUIDE

1: SERIES

64-PAL
SERIES
64-PAL PAL Lighting lighting product

2: FORM

NFMT8
LUMINAIRE TYPE
NFMT8 LED Strip - Mini - Top bending

3: OUTPUT

RGB
COLOR/CCT
RGB RGB - 4-Wire

4: CABLE*

CUS
POWER CABLE
CUS Built to project need

5: LENGTH

STRIP LENGTH
Enter length needed in inches - up to 1" increments.


*Project details - please include cable entry specifics

DISTRIBUTION



Outward facing

STRIP BEND




Top bending


WIRE



DIMENSIONS



Strip



PC Mounting
Track

CABLE ENTRY OPTIONS



Rear entry




Straight entry



Side entry
- Left



Side entry
- Right



Front entry

ORDERING EXAMPLE:

64-PAL-NFMT8-RGB-CUS-40


REMOTE DRIVERS

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones

ACCESSORIES

MOUNTING TRACKS
64-PAL-NFMT2-MT-E-6 6' PC mounting track for 64-PAL-NFMT2 LED strip

Photometry

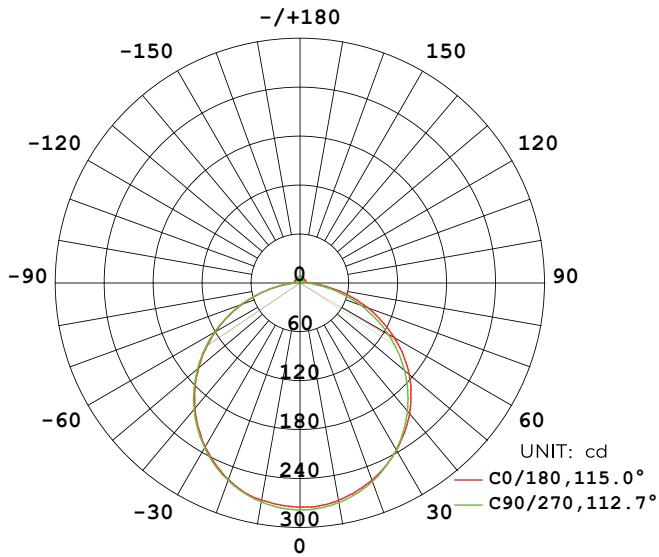

AVERAGE BEAM ANGLE(50%):113.8°

Flux out:591.6 lm

Height	Eavg,Emax	Angle:112.65°	Diameter
1m	79.41,278.61x		300.19cm
2m	19.85,69.661x		600.39cm
3m	8.824,30.961x		900.58cm
4m	4.963,17.411x		1200.77cm
5m	3.177,11.151x		1500.97cm
6m	2.206,7.7401x		1801.16cm
7m	1.621,5.6861x		2101.36cm
8m	1.241,4.3541x		2401.55cm
9m	0.9804,3.4401x		2701.74cm
10m	0.7941,2.7861x		3001.94cm

Height Eavg,Emax Angle:112.65° Diameter

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

General Product Wiring

Individual driver boards may vary - please reference driver installation guides on www.pallighting.com

