



Project Name:


Qty: Type:

Product Number:

FEATURES


- ▶ UL676 for pool / spa use
- ▶ RGB or 3000K / 5000K
- ▶ Fits standard pool niche
- ▶ Remote driver for longer lifespan
- ▶ Quick Connect cable for easy service

DIMENSIONS

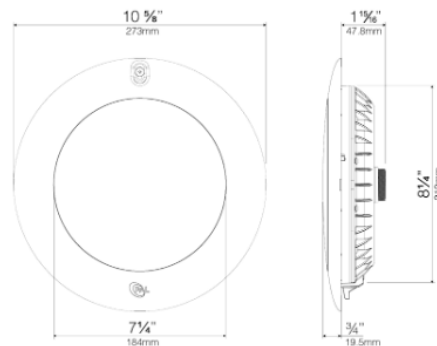

QUICK GLANCE

MOUNTING OPTIONS



Pool Niche

SPECIFICATIONS

Lumens:	Colors/CCT	Voltage	Power Rating	Lifespan	Finish	Warranty	Certification
1,904 Lm	Standard: RGB WW: 3000K CW: 5000K	Low Voltage: 24V DC Remote Driver: 120-277V AC Input 24V DC Output	27.5 W (RGB) 30 W (WW/CW)	Standard: L70 > 100,000 hr. @ 25° C	Standard: Stainless steel flange.	Standard: 3 Year limited warranty.	UL676 listed for pool and spa application - IP68

ORDERING GUIDE

ORDERING EXAMPLE:

64-EGLCW-80

1: SERIES

SERIES
64-EGL EvenGlow Series - LED 10" pool light

2: OUTPUT

COLOR/CCT
BLANK RGB - 4-Wire
WW 3000K - 2-Wire
CW 5000K - 2-Wire

3: CABLE LENGTH

CABLE LENGTH
01 No cable
80 80' cable
150 150' cable

REMOTE DRIVERS

SINGLE COLOR REMOTE DRIVER	RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-2T-65 2 Wire - 65W Driver - 24VDC	64-PCR-1Z-65 Remote control (included) - 65W Driver - 24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-3T-120 2 Wire - 120W Driver - 24VDC	64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3T-500 2 Wire - 500W Driver - 24VDC	64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
	64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones
	64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	

COMPONENT OVERVIEW



64-EGL
(Side View)



64-EGL
(Back View)



Quick Connect
cable




Remote Driver
(Wall mounted)

Project Name:

Qty: Type:

Product Number:

WIRING OVERVIEW

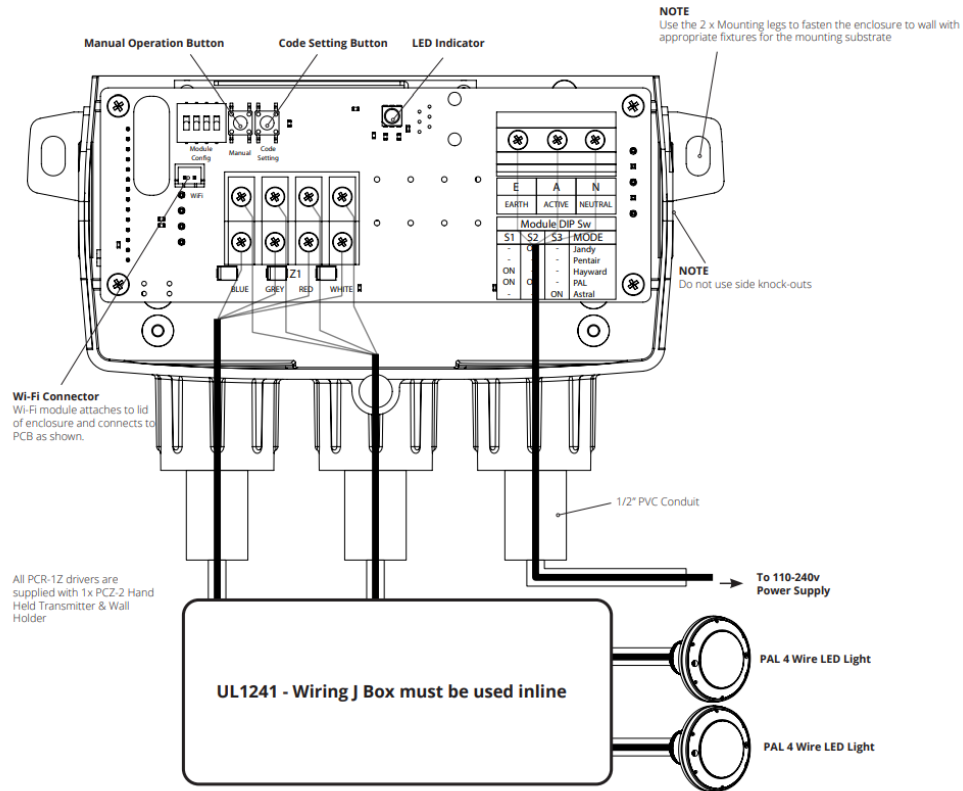

INSTALLATION OVERVIEW

