

Project Name:

Qty: Type:

Product Number:

FEATURES

- Outdoor - Water resistant
- Instant color change
- DMX controllable
- RGB
- UL listed for pool use
- Smart-home compatible

QUICK SPEC

Lumens:	Color Output:	Voltage:	Cutting increment:	Max. length:
23 Lm/ft	RGB: Color changing	Standard: 24V DC	2" 50 MM	32' 9.75 M

Electrical:	Controls:	Lifespan:	Housing:	Bending Radius:
3.5 W/FT	Standard driver: On/Off RF or WiFi driver: On/Off - dimming - color change - light shows through remote.	Standard: L70 > 60,000 hr. @ 25° C	Integrated anti-tension silicone extrusion. Special t-type TPU material, chlorine resistance ≤ 10ppm NaCl resistance < 4%	>2.36" >60 MM


Optics:	Warranty:	Operating temp:	Certification:	Remote Driver:
114° beam angle	3 Year limited warranty.	-40°C to 110°C (-40°F to 230°F)	UL676 listed for pool use, IP68 and IK08 rated.	1 Zone / 2 Zone / 8 Zone 24V DC output 120-277V AC input - Wi-Fi and RF - IP 65 - UL Listed

ORDERING GUIDE

DISTRIBUTION



STRIP BEND




Side bending


WIRE

4PIN RGB
24V DC

DIMENSIONS




Strip



PC Mounting
Track


CABLE ENTRY OPTIONS




Rear entry



Straight entry



Side entry - Left



Side entry - Right

ORDERING EXAMPLE:

64-PAL-NFMS2-RGB-CUS-40

1: SERIES	2: FORM	3: OUTPUT	4: CABLE*	5: LENGTH
64-PAL	NFMS2	RGB	CUS	
SERIES	LUMINAIRE TYPE	COLOR/CCT	POWER CABLE	STRIP LENGTH
64-PAL PAL Lighting lighting product	NFMS2 LED Strip - Mini - Side bending	RGB RGB - 4-Wire	CUS Built to project need	Enter length needed in inches - up to 1" increments.

*Project details - please include cable entry specifics


REMOTE DRIVERS

RGB REMOTE DRIVER	DMX REMOTE DRIVER
64-PCR-1ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC	64-PCR-2DMX-65 DMX - 65W Driver - 24VDC - 2 Zones
64-PCR-2ZW-65 Remote control / PAL Lighting APP controlled - 65W -24VDC - 2 Zones	64-PCR-3DMX-120 DMX - 120W Driver - 24VDC - 2 Zones
64-PCR-3DW-120 Remote control / PAL Lighting APP controlled - 120W -24VDC - 2 Zones	64-PCR-3DMX-500 DMX - 500W Driver - 24VDC - 2 Zones
64-PCR-3DW-500 Remote control / PAL Lighting APP controlled - 500W -24VDC - 2 Zones	64-PCR-3DMX-500-8Z DMX - 500W Driver - 24VDC - 8 Zones

ACCESSORIES

MOUNTING TRACKS
64-PAL-NFMS2-MT-E-6 6' PC mounting track for 64-PAL-NFMS2 LED strip

Photometry

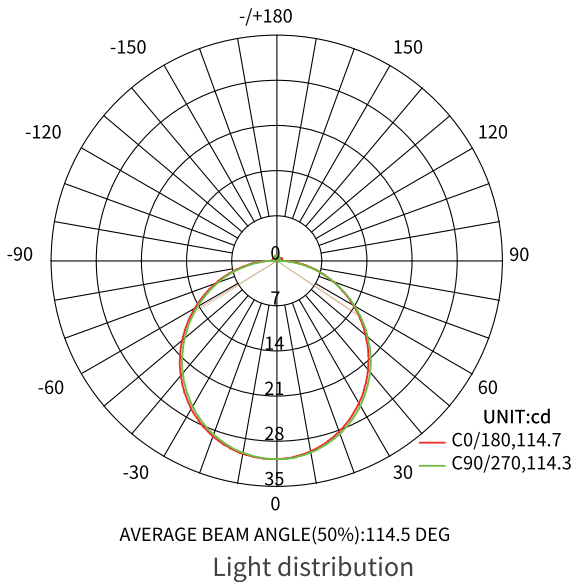

Flux out:67.02 lm

Height	Eavg,Emax	Angle:114.23deg	Diameter
1m	8.330,30.77lx		309.36cm
2m	2.082,7.693lx		618.71cm
3m	0.9255,3.419lx		928.07cm
4m	0.5206,1.923lx		1237.42cm
5m	0.3332,1.231lx		1546.78cm
6m	0.2314,0.8548lx		1856.14cm
7m	0.1700,0.6280lx		2165.49cm
8m	0.1301,0.4808lx		2474.85cm
9m	0.1028,0.3799lx		2784.20cm
10m	0.0833,0.3077lx		3093.56cm

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Effective average illuminance

Note: The above data is based on 24V monochrome 4000K color temperature. If you need other models of IES files, please download the corresponding models from the IES database.

General Product Wiring

Individual driver boards may vary - please reference driver installation guides on www.pallighting.com

