



C2 should be placed as close to U1 Power pin as possible.



U1B can be set up as a copy of U1A if a second LED flasher is required.

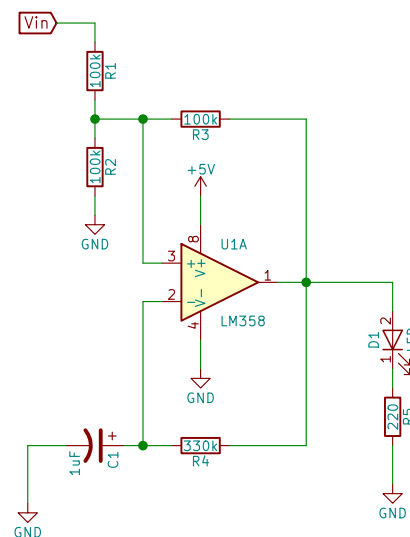

R4 value can be varied for a different frequency of flashing.
Larger = slower flash, smaller = faster flash.

Roscco

Sheet: /

File: Led Flash.sch

Title: Led Flasher For Microcontrollers

Size: A4 Date: 14/04/2018

KiCad E.D.A. kicad 4.0.7

Rev: 1.0

Id: 1/1