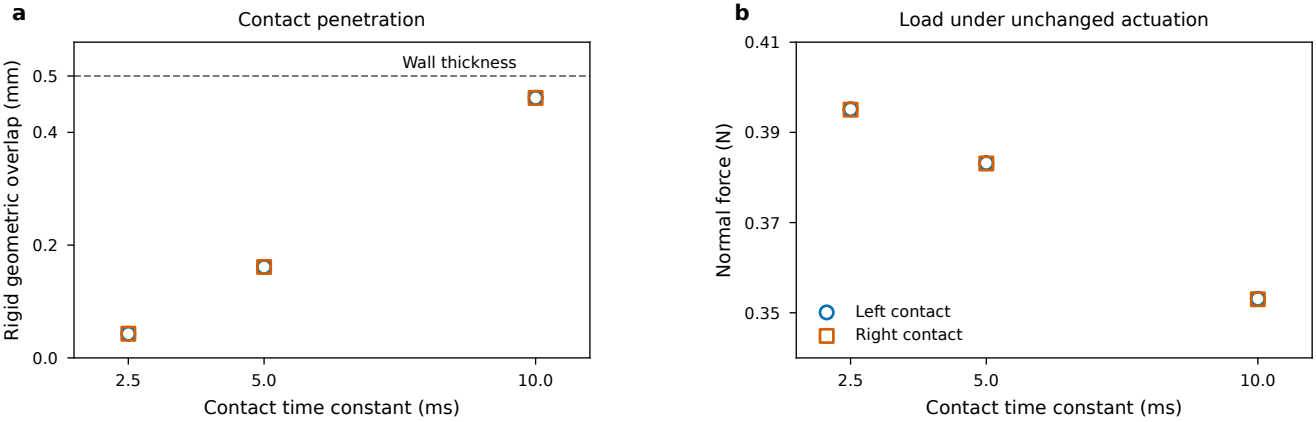
a
Contact penetration
Wall thickness
Rigid geometric overlap (mm)
0.0
0.2
0.4
0.5
2.5
5.0
10.0
Contact time constant (ms)
b
Load under unchanged actuation
Normal force (N)
0.35
0.37
0.39
0.41
Left contact
Right contact
2.5
5.0
10.0
Contact time constant (ms)