Journal of Open Aviation Science JOAS

PROCEEDINGS | *The 13th OpenSky Symposium* (*Pre-print*)

Review of ADS-B Data Usage with the focus on Data Cleaning

Ruolan REN,*,1 Jingcheng ZHONG,1 Dizhi GUO,1 Ruixin WANG,*,1 and Christophe HURTER*,2

1Civil Aviation University of China, Tianjin, China
2Université de Toulouse, ENAC, Toulouse, France
3IPAL Singapore, Singapore

*Corresponding author: rowanren@qq.com; ruixin.wang@recherche.enac.fr; christophe.hurter@recherche.enac.fr

Abstract

Automatic Dependent Surveillance-Broadcast (ADS-B) data have become a key resource for research on trajectory prediction, conflict detection, and air traffic management. However, due to inherent limitations in data acquisition and transmission, ADS-B datasets often contain missing points, irregular sampling, and anomalies. To ensure usability, researchers typically perform data cleaning and preprocessing before analysis. While these operations improve consistency and completeness, they inevitably alter the original data characteristics, potentially causing deviations between algorithm outputs and actual operational patterns. Existing studies tend to focus on specific cleaning methods, but lack systematic and quantitative evaluations of how different cleaning strategies impact downstream applications. To address this gap, this study systematically evaluates the relationship between data cleaning and algorithmic performance in ADS-B analytics. This study provides a comprehensive review of major ADS-B data applications and common cleaning methods, summarizing typical preprocessing pipelines used in current research and offering guidance for developing more robust preprocessing and evaluation frameworks. An AutoEncoder (AE)-based experiment is conducted using datasets contaminated with different types of noise (Gaussian, drift, and spikes) to evaluate the impact of cleaning strategies on trajectory reconstruction performance. The experimental results show that the AE model is sensitive to Gaussian noise and relatively robust to drift and spike disturbances, suggesting that ADS-B data cleaning should prioritize smoothing high-frequency noise for improving trajectory reconstruction performance.

Keywords: ADS-B; Data Cleaning; Autoencoder; Algorithm Performance

1. Introduction

ADS-B has become a crucial data source for air traffic management, supporting a wide range of applications. Typical studies include trajectory prediction [1, 2], flight phase identification [3], trajectory clustering and modeling [4], safety analysis [5] (e.g., conflict detection and collision risk assessment), and airport operations optimization [6] (e.g., runway occupancy and taxiing analysis). ADS-B has also become a key enabler for environmental studies such as fuel consumption estimation, contrail detection, and large-scale emissions assessment. Despite these advances, ADS-B data quality remains a significant concern. Missing points, irregular sampling, and anomalies complicate processing and may bias analysis. To improve usability, researchers apply cleaning methods such as interpolation, smoothing, outlier removal, and resampling. However, these methods can also distort the statistical and physical characteristics of trajectories. For example, interpolation can mask subtle variations and increase prediction errors, while outlier removal may discard rare but genuine safety-critical events. Yet, existing studies rarely provide systematic and quantitative analysis of how different strategies influence downstream results. To address this gap, this study systematically evaluates the relationship between data cleaning and algorithmic performance in ADS-B analytics. Chapter 2 reviews eight major application domains of ADS-B data to contextualize its analytical value. Chapter 3 summarizes common data cleaning techniques and proposes a generalized preprocessing pipeline integrating detection, interpolation, and smoothing. Chapter 4 presents an autoencoder-based case study that quantifies the impact of different noise types (Gaussian, drift, and spikes) on trajectory reconstruction performance, followed by a discussion of the observed impacts and implications. Finally, Chapter 5 concludes the study and outlines directions for future research. These analyses aim to provide a clearer understanding of how data quality shapes learning-based ADS-B algorithms and to inform the design of more robust data processing strategies.

2. State of the Art

Early civil aviation primarily relied on primary and secondary radars, which had limitations such as limited detection range, insufficient information accuracy, and delayed updates. These shortcomings not only increased the navigation difficulty for long-distance flights but also posed safety risks[7]. To address these challenges, the aviation industry has gradually developed the ADS-B system through decades of exploration. Relying on the Global Navigation Satellite System (GNSS) and on-board sensors, ADS-B integrates information such as barometric altitude, inertial navigation, and airspeed measurements to generate flight status parameters. It then periodically broadcasts key data like identification codes, position, altitude, speed, and flight intentions via on-board equipment [8].

The development of ADS-B can be traced back to the 1970s. In 2003, the 11th Air Navigation Conference of the International Civil Aviation Organization (ICAO) [9] formally recognized ADS-B as a key surveillance tool for future air traffic management and promoted its standardization and application. After 2010, ADS-B entered the phase of large-scale global application. Countries have successively introduced regulations to promote its widespread use in aviation operations. Meanwhile, the application of space-based ADS-B [10] has enabled real-time, high-precision surveillance of approximately (70%) of the world's airspace. Open platforms represented by the OpenSky Network [11] have also provided large-scale ADS-B data resources for academic research.

2.1 ADS-B Data current usages

This section presents an overview of the current use of ADS-B data in the research domain, identifying and organizing clusters of algorithms and application areas. In this study, the collected literature is categorized into eight major domains, spanning from trajectory modeling and operational management to environmental sustainability and cybersecurity. These analyses provide a structured overview of the evolving research landscape surrounding ADS-B applications in aviation.

2.1.1 Paper Selection

To ensure both representativeness and research quality, we focused on journals and conferences with high academic impact in the fields of air traffic management (ATM) and digital aviation. The primary sources include the *Digital Avionics Systems Conference (DASC)*, *SESAR Joint Undertaking Annual Conference*, *Air Traffic Management Seminar (ATM Seminar)*, *International Conference on Research in Air Transportation (ICRAT)*, *Transportation Research Part C: Emerging Technologies*, *IEEE Transactions on Intelligent Transportation Systems*, and the *Journal of Air Transport Management (JATM)*. Literature retrieval was mainly conducted through academic databases such as IEEE Xplore, ScienceDirect, and Elsevier Scopus, as well as publicly available proceedings from the aforementioned conferences.

Considering that large-scale implementation and operational use of ADS-B systems began worldwide around 2012, this year was set as the starting point for the large-scale research phase of ADS-B data. Therefore, this study selected English-language publications issued between 2012 and December 2024 as the objects of analysis. We manually collected research that explicitly utilized real ADS-B flight data from the selected journals and conferences, excluding studies that relied solely on simulated or synthetic datasets. The detailed screening process was as follows:

- **Initial Screening:** Titles and abstracts were reviewed to confirm the study's relevance to the aviation domain, such as airspace optimization, trajectory prediction, or conflict detection and avoidance (DAA).
- **Keyword Filtering:** Only papers containing the term "ADS-B" in the title, abstract, or keywords were retained.
- **Data Authenticity Criterion:** Studies were required to clearly indicate the use of real ADS-B datasets. Papers using only simulated or artificially generated trajectories were excluded.
- **Duplication and Accessibility Review:** Duplicate publications and inaccessible preprints were removed to ensure the reproducibility and verifiability of the results.

After multiple rounds of screening and manual verification, a total of 145 papers were collected, covering representative applications of ADS-B data across diverse research domains. The distribution of the selected studies by source is illustrated in Figure 1.

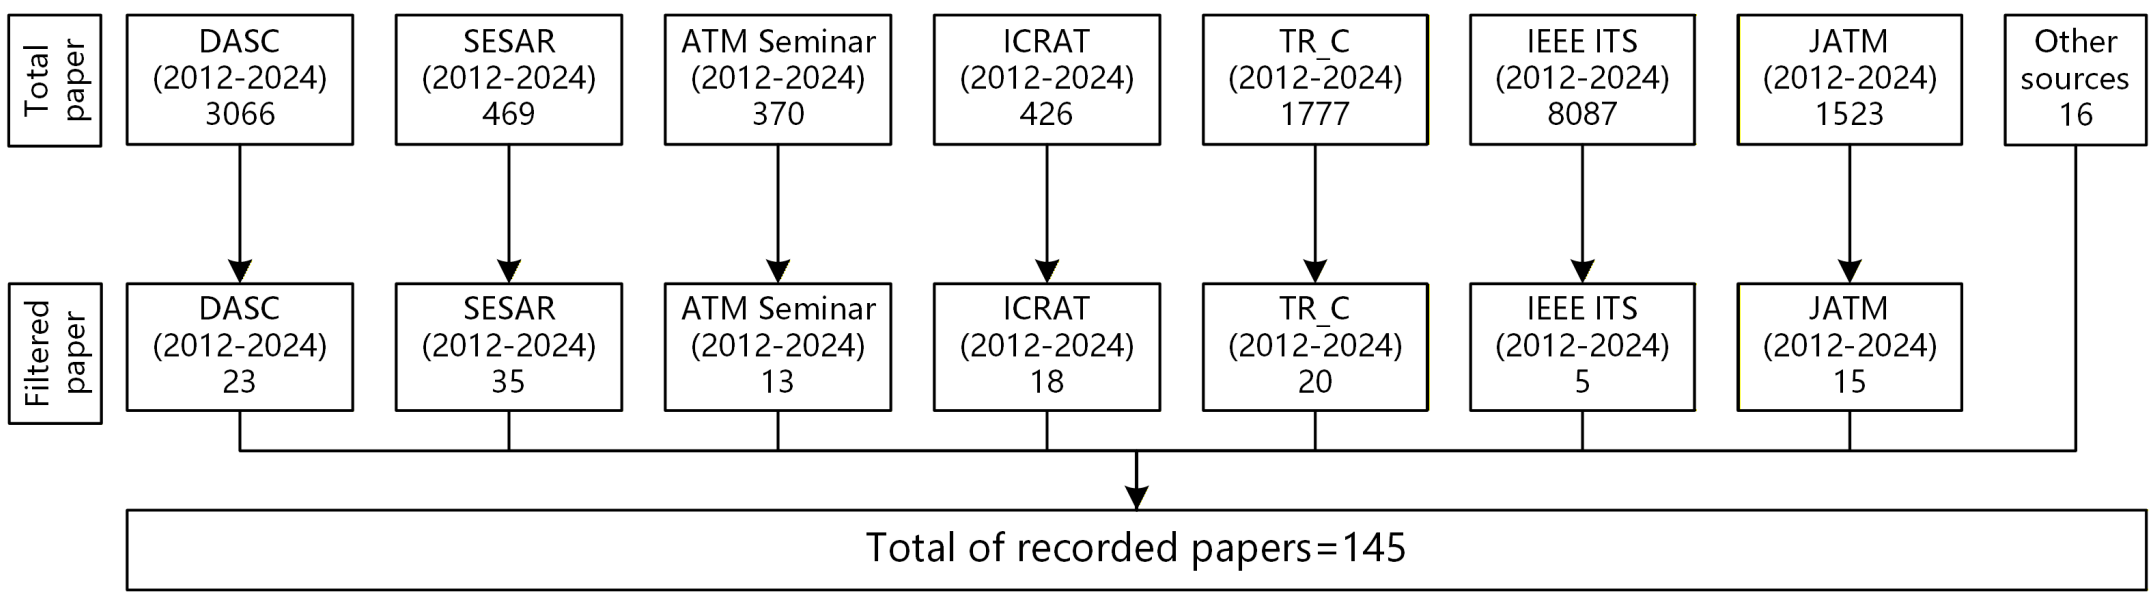

Figure 1. Paper collection flow of the review made on Digital Avionics Systems Conference (DASC), SESAR Joint Undertaking Annual Conference (SESAR), Air Traffic Management Research and Development Seminar (ATM seminar), International Conference on Research in Air Transportation (ICRAT), Transportation Research Part C: Emerging Technologies (TR_C), Journal of Air Transport Management (JATM), and IEEE Transactions on Intelligent Transportation Systems (IEEE Trans. on ITS).

2.1.2 Paper Clustering and Categorization

The screened publications provided a solid data foundation for the categorization and trend analysis of ADS-B applications in this study. To systematically organize the characteristics and focal points of different research directions, we employed a mixed quantitative–qualitative approach for feature extraction and clustering of the collected literature.

Using Excel spreadsheets and reference management tools, the following key features were extracted from each selected conference and journal: Publication year; Source conference or journal; Paper title and author keywords; Application scenario; Research focus or analytical perspective; Methods and algorithmic approaches (e.g., machine learning, optimization models, statistical analysis, simulation frameworks); Description of the ADS-B dataset used (e.g., public data repositories, airport-specific data, or crowdsourced datasets).

In the preliminary organization stage, the literature was grouped into four broad directions: trajectory prediction, air traffic management, aircraft performance estimation, and environmental sustainability. However, a subsequent semantic and thematic analysis revealed substantial overlaps and hierarchical relationships among these themes. Therefore, this study reclassified the literature through a combined thematic synthesis approach, considering each study's research objectives, data utilization patterns, and the functional role of ADS-B. Finally, ADS-B–related studies were categorized into eight major domains: Trajectory Modeling and Prediction, Operational Optimization and Management, Operational Safety and Surveillance, Aircraft Performance and Efficiency, Data Engineering and Enhancement, Environment and Sustainability, Security and Cybersecurity, Methodology, Simulation, and Policy. This classification framework establishes the structural foundation for the domain-specific analyses presented in the following sections. The classification results, derived from thematic induction and semantic grouping, are summarized in Table 1, illustrating the representative applications and algorithms across the eight research domains.

Table 1. Summary of ADS-B Application Categories, Main Methods, and Data Roles

Category	Main Methods	Role of ADS-B Data
Trajectory Modeling and Prediction	Clustering (DBSCAN, K-means); LSTM/Transformer prediction; AE feature extraction; DTW; PCA; Hybrid physical–data models.	**Core data source**
Operational Optimization and Management	MILP; Simulated annealing; Heuristic algorithms; KPI-based performance metrics; Historical traffic analysis.	**Real-time/historical traffic input**
Operational Safety and Surveillance	DAA geometric models; Anomaly detection (thresholds, clustering, autoencoder, GMM); Monte Carlo risk evaluation.	**Flight monitoring and safety baseline**
Aircraft Performance and Efficiency	Dynamic equation inversion; Maximum likelihood estimation; Bayesian inference; Particle filtering; Regression and neural networks.	**Model calibration data source**
Data Engineering and Enhancement	Kalman filtering; Map-matching; Multisource fusion; Data indexing; Generative models (TimeGAN).	**Primary processing object**
Environment and Sustainability	Trajectory-based emission estimation; Remote sensing data fusion; Optimal control route planning.	**Environmental assessment input**
Security and Cybersecurity	Intrusion detection (ML classifiers); Protocol vulnerability testing; SDR signal analysis.	**Research target**
Methodology, Simulation, and Policy	Open-source simulation platform development; Data standardization; Policy and privacy analysis.	**Research infrastructure and policy object**

Trajectory Modeling and Prediction. This domain focuses on modeling and predicting aircraft trajectories based on historical and real-time data. Core tasks include 4D prediction, ETA estimation, trajectory clustering, and uncertainty quantification. As a core data source, ADS-B provides continuous, high-precision position, velocity, and altitude data that determine model accuracy. Gui et al. [12] proposed a semantic trajectory representation for arrival flight clustering to support airspace design, flow management, and ETA estimation; Wang et al. [13] applied PCA-based dimensionality reduction and Density-Based Spatial Clustering of Applications with Noise (DBSCAN) clustering for preprocessing, followed by a Multi-Cell Neural Network for short-term trajectory prediction in terminal maneuvering areas; and Wang et al. [14] integrated clustering-based preprocessing with hybrid MCNN models to improve ETA prediction accuracy.

Operational Optimization and Management. This domain focuses on improving the overall efficiency of airspace and airport operations, encompassing air traffic flow management, surface operations (taxiing and sequencing), terminal maneuvering area coordination, and airspace structure optimization. ADS-B data play a central role by providing continuous and fine-grained historical and real-time traffic information, serving as a reliable input for optimization models and decision-support systems. It enables accurate operational performance evaluation and data-driven strategy optimization. Research in this area often applies Linear Programming, Simulated Annealing, and heuristic algorithms to address sequencing, scheduling, and routing problems. Other studies employ queuing models and Key Performance Indicators (KPIs) for operational assessment or mine historical ADS-B data to identify bottlenecks such as taxiway congestion and sector capacity limits. Basora et al. [15] combined DBSCAN clustering with Random Forest regression for sector occupancy prediction, and Delahaye et al. [16] used hierarchical clustering with Transformer models for flow pattern detection and capacity management.

Operational Safety and Surveillance. This research domain aims to enhance aviation safety and situational awareness through data-driven analysis. It covers conflict detection and resolution (DAA / ACAS), abnormal event detection (e.g., go-arounds, unstable approaches), assessment of collision risk and airspace complexity, and performance evaluation of surveillance systems. As an independent surveillance source, ADS-B data provide continuous and high-precision trajectory and state information, enabling real-time monitoring of aircraft behavior, detection of potential conflicts and anomalies, and quantitative assessment of operational safety. Bonifazi et al. [17] identified unstable approaches and go-arounds using ADS-B data, employing rule-based methods and Gaussian Mixture Models for anomaly detection and integrating runway and weather information for improved accuracy. Rorie et al. [18] conducted the first real-world evaluation of the ACAS Xr airborne collision avoidance system. Zhang et al. [19] investigated conflict-free routing strategies and compared multiple optimization algorithms, while Bao et al. [20] proposed a multi-airport terminal area risk prediction framework to assess inter-airport conflict probabilities.

Aircraft Performance and Efficiency. This research area focuses on deriving aircraft performance parameters from flight data to calibrate or complement existing models such as BADA, and to evaluate energy efficiency across aircraft types and flight phases. Key parameters include aircraft mass, drag polar, thrust settings, fuel consumption, and speed profiles. In this context, ADS-B data provide essential flight state information, such as ground speed, vertical rate, and heading—enabling large-scale, fleet-level performance analysis even in the absence of detailed design data. This supports more accurate and data-driven model calibration and validation. Sun et al. [21] developed a probabilistic framework to estimate aerodynamic parameters from operational data; Schultz et al. [22] integrated FDR and ADS-B data to model fuel consumption and operational efficiency using machine learning methods; and Alligier et al. [23] predicted aircraft mass and speed intent during climb to enhance physics-based trajectory prediction.

Data Engineering and Enhancement. This category focuses on improving the quality and usability of raw ADS-B data, which form the foundation for subsequent analytical and modeling applications. Key tasks include anomaly detection, missing-value imputation, multi-source data fusion, data compression and indexing, and synthetic data generation. In this domain, ADS-B data themselves are the core subject of engineering—aimed at producing cleaner, more complete, and more interoperable datasets that support trajectory prediction, operational analysis, and safety evaluation. Tabassum et al. [24] conducted long-term statistical analysis to identify anomalies and assess the impact of systematic errors on trajectory accuracy. Wandelt et al. [25] introduced an efficient compression and indexing framework to enable scalable querying and analytics of large-scale ADS-B records. Spinielli et al. [26] developed a reproducible reference trajectory dataset by integrating multiple surveillance sources for performance assessment under the EUROCONTROL PRU initiative.

Environment and Sustainability. This research area focuses on quantifying the environmental impact of aviation operations and exploring sustainable optimization strategies, including greenhouse gas and pollutant emission assessment, contrail formation detection and avoidance, and noise evaluation. Owing to its wide coverage and high temporal resolution, ADS-B data serve as a crucial source for environmental modeling and validation. For instance, Roosenbrand et al. [6] proposed a method to estimate contrail altitudes using shadows in Landsat satellite imagery, with ADS-B data employed as ground truth for validation. Sun et al. [27] integrated satellite-based and ground-based ADS-B data with wind field information to improve emission estimation and compared actual flight trajectories with optimal routes to quantify excess emissions.

Security and Cybersecurity. This domain focuses on identifying and mitigating cybersecurity threats targeting the ADS-B system itself, such as False Data Injection Attacks (FDIA), signal spoofing, and message tampering, to ensure the integrity and reliability of surveillance information. In this field, the ADS-B protocol, signal, and data link are the direct subjects of vulnerability analysis and protection technology research. For example, Cretin et al.[28] proposed a Domain-Specific Language-based testing framework to evaluate the resilience of Air Traffic Control systems against FDIA, while Khan et al. [29] employed machine learning techniques for ADS-B intrusion detection.

Methodology, Simulation, and Policy. This category provides foundational tools, frameworks, and policy support for aviation research. It includes the development of open-source simulation platforms, advocacy of reproducible research practices, establishment of data standards, and discussion of regulatory and privacy issues related to ADS-B deployment. In this context, ADS-B serves both as input data for constructing realistic scenarios in simulation environments and as a focal topic in advancing data-sharing policies, privacy protection, and industry standards. Mehlitz et al. [30] proposed the RACE framework for comprehensive airspace data analysis, while Bolic et al. [31] systematically elaborated on the European ATM Open Science Alliance and its Open Performance Data Initiative (OPDI), which aim to foster transparency and open research in the ATM domain.

To illustrate the application domains of ADS-B data, a quantitative analysis was conducted on 145 valid papers according to the eight classification categories, as shown in Figure 2. Since some studies involve multiple domains (e.g., Data Engineering and Aircraft Performance Calculation), they were counted in each relevant category; thus, the total number in the chart exceeds 145.

Overall, Operational Optimization and Management dominates ADS-B research (30.6%), followed by Operational Safety and Surveillance (23.6%) and Trajectory Modeling and Prediction (18.5%). Together, these account for over 70% of all studies, reflecting strong alignment with ADS-B's core functions—enhancing operational efficiency and supporting real-time safety monitoring. In contrast, Security and Cybersecurity (2.5%), Environment and Sustainability (5.1%), and Methodology, Simulation, and Policy (5.1%) remain less represented, indicating emerging but underexplored areas.

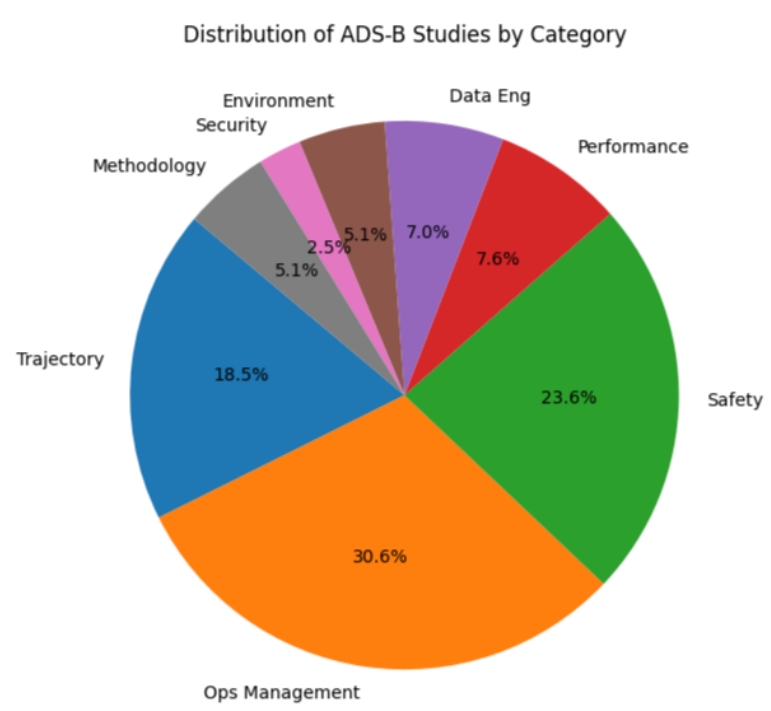

Figure 2. Pie Chart of ADS-B Research Domain Distribution: "Trajectory" for Trajectory Modeling and Prediction; "Ops Management" for Operational Optimization and Management; "Safety" for Operational Safety and Surveillance; "Performance" for Aircraft Performance and Efficiency; "Data Eng" for Data Engineering and Enhancement; "Environment" for Environment and Sustainability; "Security" for Security and Cybersecurity; "Methodology" for Methodology, Simulation, and Policy.



Figure 3. Systematic Cleaning Pipeline of ADS-B Trajectories (Raw to Processed) Based on Literature Survey and Taxonomic Summary.

3. Summary of ADS-B Cleaning Methods, work flow

3.1 Data Quality Issues in ADS-B Surveillance

Real-world ADS-B data often contain a considerable amount of noise and anomalous errors. Several studies have conducted in-depth analyses of these issues. For instance, Tabassum et al. [32] systematically demonstrates various types of anomalies found in ADS-B messages, while [33] and [34] provide detailed examinations of noise sources and error mechanisms within crowdsourced datasets. These studies collectively indicate that ADS-B data quality is heavily influenced by factors such as hardware performance, signal environment, and network structure, resulting in inconsistencies and unreliability across raw observations.

In general, the quality issues of ADS-B data can be categorized into four dimensions:

(1) **Completeness**: ADS-B data often suffer from message loss, missing fields, and update interruptions, leading to temporal or spatial discontinuities in flight trajectories. Such problems are mainly caused by variations in receiver performance, signal attenuation, and the instability of crowdsourced networks, resulting in insufficient data coverage.

(2) **Consistency**: Some data exhibit internal contradictions in temporal, spatial, or physical attributes, such as out-of-order timestamps, abrupt altitude jumps, or unrealistic speed values. These issues typically arise from clock drift, decoding errors, or improper data aggregation from multiple sources, undermining the logical coherence of trajectories.

(3) **Accuracy**: Systematic deviations may exist between the reported ADS-B values and the actual flight states—for example, discrepancies between barometric and geometric altitude or significant errors in reported positions and speeds. The main causes include quantization errors, receiver precision limitations, and environmental interference.

(4) **Reliability**: ADS-B datasets may contain random noise, falsified messages, or artifacts introduced by multi-source fusion, all of which degrade the credibility and usability of the information. Such reliability issues are particularly prominent in open, crowdsourced data collection environments, increasing uncertainty in subsequent analyses and modeling.

In summary, errors may occur throughout the collection, transmission, and aggregation of ADS-B data. Without proper treatment, these problems can severely affect the performance of downstream algorithms and compromise the reliability of analytical results. Therefore, systematic data cleaning and quality control are crucial to ensure the usability and accuracy of ADS-B data.

3.2 Data cleaning methods

3.2.1 Task-Oriented Filtering

Filtering ADS-B data is typically the initial step in data cleaning. Depending on the research objectives and application scenarios, most studies perform preliminary filtering of raw ADS-B data before analysis to ensure that the data used are relevant and representative. Common filtering strategies can be broadly categorized into range-based filtering and attribute-based filtering.

Range-Based Filtering This approach primarily selects ADS-B data based on temporal or spatial ranges. Temporal filtering can limit the data to specific seasons, dates, or time periods to match the study timeframe. Spatial filtering focuses on particular routes, airspaces, or airport operations. Additionally, trajectories within specific geographic boundaries (e.g., latitude/longitude ranges or airspace altitude layers) may be extracted to construct local operational networks or airspace models.

Attribute-Based Filtering Beyond temporal and spatial constraints, researchers may remove trajectories that are irrelevant or do not meet task-specific criteria. This type of filtering is often based on flight rules, operational states, aircraft types, or flight phases. For example, Dhief et al. [35] excluded flights operating under Visual Flight Rules (VFR) in a go-around behavior study. Liu et al. [50] filtered trajectories under consistent weather conditions in their study on taxiing optimization at an airport to reduce the influence of weather variations and runway configurations.

3.2.2 Outlier Detection and Removal

After the initial filtering, it is usually necessary to identify and remove outliers in order to ensure the reliability of subsequent analyses. [8] summarized and investigated common methods for outlier detection and handling. Common outlier handling methods include the removal of entire trajectories, local cleaning of individual abnormal points, and automated detection based on clustering or deep learning techniques.

The most common approach is the removal of entire trajectories. Outlier trajectories can arise from various reasons, the most frequent being incomplete data, such as trajectories with too few sampling points to accurately represent the flight process, which need to be excluded. For trajectories that are generally valid but contain a few abnormal points, researchers typically perform local cleaning. Common types of noise include duplicate points and physically impossible “jump points”. Methods like Gaussian filtering or particle filtering are often used to correct these anomalies.

Additionally, Density-Based Spatial Clustering of Applications with Noise (DBSCAN) is extensively employed for outlier detection and data cleaning. It identifies anomalous points based on local density distribution, effectively separating them from normal trajectories while simultaneously performing clustering. Compared with traditional filtering approaches, DBSCAN provides enhanced adaptability and automation, particularly for trajectory datasets with uneven spatial distributions.

The Autoencoder (AE) model, as a deep learning-based method, can likewise be applied for anomaly detection. By learning representative patterns of normal trajectories, the AE detects outliers through elevated reconstruction errors. Its ability to capture nonlinear relationships makes it well suited for high-dimensional, time-series ADS-B data, and it can be integrated with clustering or filtering methods to achieve more refined data cleaning.

3.2.3 Interpolation and resampling

In ADS-B data processing and trajectory reconstruction, interpolation and resampling are two essential preprocessing techniques. Interpolation focuses on repairing missing data points and ensuring trajectory continuity, while resampling aims to unify the temporal or spatial distribution of data, thereby improving the stability of subsequent analysis and model training. Since both techniques are often applied together in practice, they are presented here in an integrated discussion.

(1)Interpolation

The objective of interpolation is to estimate missing values between known points, thereby converting discrete trajectories into continuous and smooth curves. Depending on the fitting principle, common interpolation methods can be categorized into three groups:

Linear and Polynomial Interpolation This is the most widely used class of interpolation techniques, which assumes that variations between adjacent points follow a linear or low-order polynomial relationship. These methods are computationally efficient and suitable for short time intervals or smooth motion, but their ability to capture nonlinear behavior such as turning or climbing is limited. Representative methods include linear interpolation [36] and polynomial interpolation.

Spline-Based Interpolation Spline methods fit piecewise polynomials with continuity at segment boundaries, ensuring smoothness and stability. Typical examples include linear spline interpolation

[37], cubic spline interpolation [38], and piecewise cubic Hermite interpolation (PCHIP) [39], which introduces shape-preserving constraints to prevent unrealistic oscillations.

Spatially Adaptive Interpolation This approach ensures consistent spatial resolution along the trajectory, achieving globally uniform point density while preserving geometric accuracy and spatial consistency.

(2) Resampling Methods

Resampling aims to transform irregularly spaced ADS-B data into a unified format suitable for downstream analysis and model input. According to the dimension of unification, resampling techniques can be classified into three categories:

Fixed-Time Interval Resampling This method extracts or generates data points at a fixed temporal interval, ensuring uniform time distribution along the trajectory. It is the most fundamental form of temporal standardization, with sampling intervals ranging from one second [40] to several minutes [41], depending on the temporal resolution required by the study.

Trajectory Feature-Based Resampling This approach resamples according to geometric characteristics such as turning points or curvature changes, thereby reducing redundancy while preserving essential trajectory features.The representative algorithms are: RDP Algorithm (Douglas–Peucker) [42]: Iteratively removes points with distances below a given threshold from the line connecting the start and end points, retaining only key inflection points. This reduces data volume while maintaining the overall geometric structure of the trajectory. Fixed Number of Inputs algorithm: Uses interpolation to map each trajectory into a fixed number of points, ensuring consistent input dimensions for deep learning models such as AE [43] and Transformers [44].

Spatial or Curve-Based Resampling This category focuses on spatial uniformity or curve smoothness. Points are extracted along the trajectory at fixed spatial intervals to achieve uniform spatial density, which is particularly useful for spatial analysis tasks such as airport vicinity trajectory density mapping or taxiway path planning, where uneven temporal sampling may otherwise cause spatial distortion.

3.2.4 Smoothing

After resampling, researchers often apply trajectory smoothing to further suppress noise, reduce trajectory jitter, and preserve the essential motion trend, thereby providing more reliable inputs for subsequent analysis and model construction. According to their underlying principles and computational characteristics, trajectory smoothing methods can generally be categorized into three groups:

Model-based filtering methods These methods rely on state-space or probabilistic estimation models to describe the relationship between the aircraft's true motion states and observational noise, achieving optimal trajectory estimation and smoothing. Representative algorithms include the Kalman Filter [45] and Extended Kalman Filter, which obtain optimal state estimates by minimizing the covariance of recursive estimation errors. Owing to their strong dynamic modeling capability and physical interpretability, such methods are widely used for aircraft state estimation and altitude smoothing tasks.

Signal processing–based filtering methods In this approach, the trajectory is treated as a time-series signal, and digital filters are employed to suppress undesired frequency components, thus achieving trajectory smoothing. Typical examples include the finite impulse response (FIR) low-pass filter [46], the Exponential Moving Average (EMA) algorithm [47] , and the bilateral window averaging method [48]. By convolutional or recursive operations, these methods effectively remove oscillatory noise from uniformly sampled trajectories.

Curve-fitting and geometric-statistical methods These methods approximate the entire trajectory using mathematical curves or geometric-statistical representations to achieve global-level smoothing, producing continuous and geometrically consistent trajectories. For instance, the smoothing cubic spline [49] is a variational fitting technique that balances data fidelity and smoothness through an optimized regularization parameter. The Hough voting algorithm [50], based on the global geometric consistency of trajectories, maps local trajectory features into a parameter space and serves as a common tool for geometric trajectory reconstruction.

3.2.5 ADS-B data cleaning pipeline

Overall, ADS-B data cleaning typically follows a logical progression from macroscopic filtering to microscopic refinement. As illustrated in Figure 3, the cleaning process generally consists of the following steps:

First, the raw ADS-B data are filtered by temporal, spatial, and flight-related attributes according to the research objectives, in order to extract a subset that meets the analysis requirements. Next, preliminary denoising is performed, including duplicate removal, elimination of trajectories with excessive missing data, and correction of abrupt anomalies, thereby improving data completeness and consistency. On this basis, interpolation and resampling are applied to fill missing values and to unify the temporal or spatial resolution, providing a structured foundation for subsequent algorithmic processing. Finally, trajectory smoothing is carried out to further suppress residual noise and random jitter, extracting the core motion trends that reflect the true flight dynamics.

In recent years, several open-source tools have provided comprehensive support for implementing the above data-cleaning procedures. Among them, the Traffic Library [51] has been widely adopted. It offers ready-to-use implementations for each stage of the workflow, greatly simplifying the preprocessing of ADS-B data. Researchers can transform raw data into high-quality trajectories without developing low-level algorithms manually, which significantly lowers the technical barrier to aviation data processing and allows greater focus on downstream analytical tasks.

It should be noted that the above workflow is derived from our review and comparative analysis of the collected papers. However, the survey reveals significant inconsistencies in how data-cleaning procedures are described across studies. Some works mention only general terms such as “filtering” or “pre-processing” without detailing the specific methods or parameter configurations. This lack of transparency and consistency undermines the reproducibility and comparability of research outcomes and may also affect the reliability of conclusions regarding algorithmic performance.

3.3 Analysis of Data Cleaning Operations

The previously discussed data cleaning procedures can enhance the completeness, consistency, accuracy, and reliability of ADS-B data. However, their impact on downstream algorithms is complex and multifaceted.

Outlier Removal: Eliminating outliers helps filter noise and improve data purity, yet misjudgments may remove legitimate maneuvers (e.g., temporary avoidance), thereby reducing the accuracy of flight pattern modeling. Excessive removal of marginal data can also reduce the sample size and weaken the representativeness of rare conditions such as adverse weather or remote airspace. Moreover, among the two methods introduced earlier, DBSCAN is sensitive to uneven trajectory densities and may misclassify sparse but normal points as anomalies. The AE, on the other hand, relies on sufficient and high-quality normal data for training; any bias in the training set may shift the anomaly detection threshold, causing normal trajectories to be incorrectly flagged as outliers and introducing additional judgment errors.

Interpolation and Resampling: These techniques fill missing points and standardize temporal resolution to improve trajectory continuity and comparability. However, excessive or improper interpolation may obscure genuine micro-maneuvers, while resampling can introduce artificial variations in speed and acceleration. Such distortions affect models that rely on short-term motion states, reducing their ability to capture key dynamics and increasing prediction errors. Moreover, interpolation may blur aircraft proximity, weakening conflict detection and risk identification.

Smoothing: These filters effectively suppress high-frequency jitter in positional data, producing smoother trajectories and facilitating the calculation of derived features such as heading and curvature. Nevertheless, smoothing can weaken sharp trajectory characteristics, such as the precise onset and recovery points of turns, which may negatively affect maneuver-based anomaly detection (e.g., go-around identification) and flight phase classification models.

Overall, ADS-B data cleaning is a crucial step in improving data integrity and reliability. However, as the above limitations indicate, over-cleaning may remove essential flight characteristics, while insufficient cleaning may fail to meet the quality requirements for algorithmic processing. Both extremes can adversely affect downstream analysis and model performance.

Therefore, in practical applications, researchers need to balance data fidelity and usability when designing preprocessing pipelines. In the following chapter, the influence of different cleaning strategies on algorithm performance will be quantitatively evaluated through experiments.

4. Use case: investigation of the noise impact on Auto Encoder algorithm

This section presents a complete case study that constructs artificial noise experiments to quantitatively evaluate the effects of three typical noise types-Gaussian noise, drift, and spikes—on the trajectory reconstruction performance of an AE model. The results further help to identify key priorities and directions for the data cleaning stage. The experiment employs an ADS-B dataset collected at Zurich Airport, covering trajectory data recorded from 04:57:13 (UTC) on October 1, 2019 to 18:57:37 (UTC) on November 30, 2019, as shown in Figure 4. The dataset contains approximately 2.8 million ADS-B messages, representing the complete trajectories of about 14,000 flights. Each record includes fields such as timestamp, altitude, longitude, latitude, ground speed, heading, callsign, and ICAO24 code, with longitude ranging from 7.5702 to 9.5276 and latitude from 46.8019 to 48.1302.

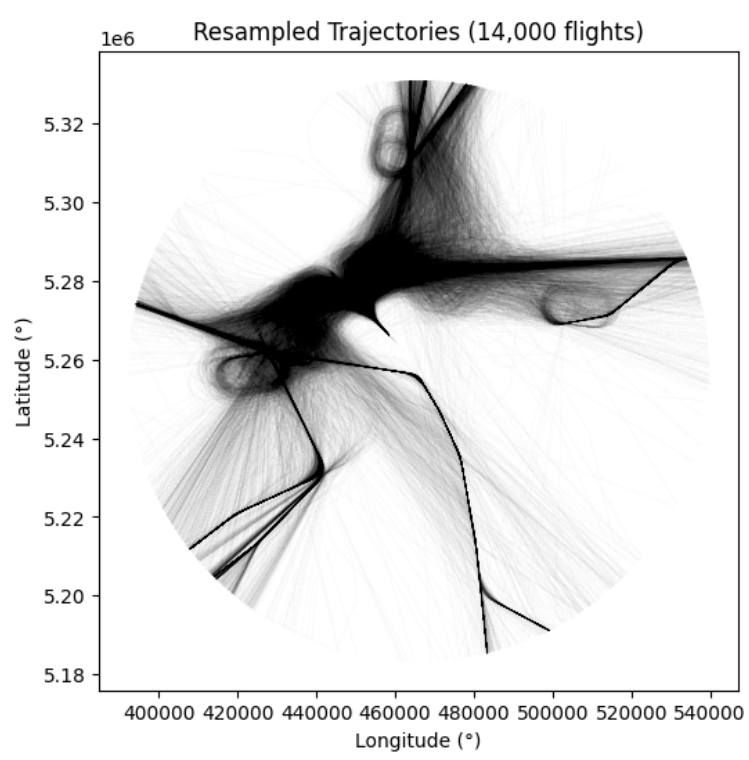

Figure 4. Visualization of All Flight Trajectories at Zurich Airport from 04:57:13 on October 1, 2019 to 18:57:37 on November 30, 2019: Resampled Trajectories (14,000 Flights) with Transparency to Reflect Trajectory Distribution Density

For model training, the data were preprocessed as follows: trajectories were resampled so that each one contained 100 coordinate points, ensuring a uniform input dimension; and normalization was applied to preserve the spatial proportion of coordinates.

4.1 Auto-encoder Model

In terms of algorithm selection, this study builds a simple yet stable AE model. The AE learns the latent space representation of flight trajectories by performing unsupervised feature compression and reconstruction, enabling it to reproduce the input trajectory data. The AE comprises two symmetric subnetworks: an encoder and a decoder. The encoder compresses a 200-dimensional trajectory vector through layers of 128, 64, and 32 neurons into a 32-dimensional latent representation. The decoder mirrors this structure to reconstruct the trajectory back to 200 dimensions.

The dataset is divided into training and validation sets (8:2), and the AE is trained unsupervised under consistent normalization. Training and validation losses are monitored for convergence, which occurs after about 200 epochs with MSE $\approx$ 0.002, indicating effective learning and strong reconstruction performance.

4.2 Baseline Generation

The trained AE model identifies trajectories most similar to clean data as the baseline. It reconstructs all normalized samples and ranks them by reconstruction error, selecting those with the lowest errors. Trajectories that are highly reconstructable, which show minimal error, are considered the most representative and clean within the dataset. As shown in Figure 5, the baseline trajectories exhibit high smoothness and spatial consistency, conforming to the physical laws of real flight paths. In contrast, high-error samples, showed in Figure 6, often contain data anomalies or noisy points. Using AE reconstruction error as the selection criterion enables automatic identification of high-quality trajectories without manual thresholds or interpolation. This method helps avoid errors or inappropriate parameter settings that can arise during manual preprocessing, thereby producing a statistically sound and model-adaptive baseline dataset. In total, 100 high-quality trajectories were selected as the baseline dataset for the experiment.

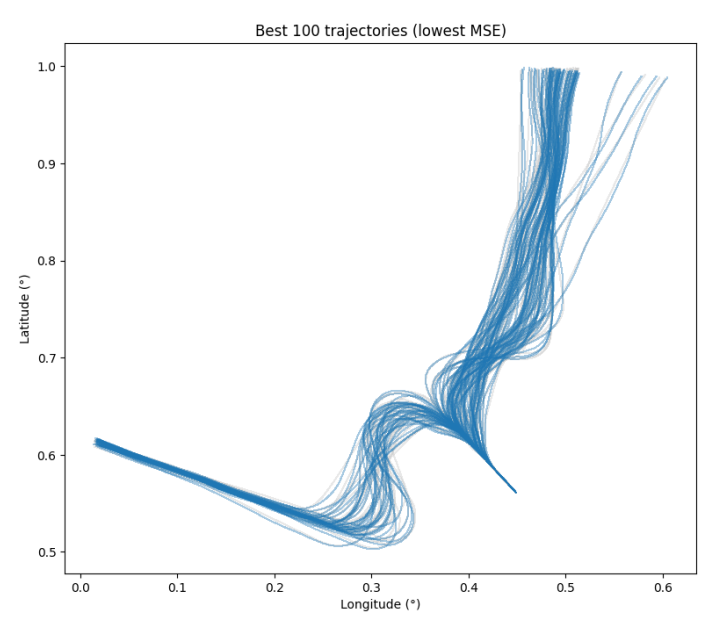

Figure 5. The best 100 trajectories



Figure 6. The worst 100 trajectories

4.3 Noise Injection

To systematically analyze the impact of different noise types on AE reconstruction performance, three typical artificial noise sources were injected into the baseline trajectories: Gaussian noise, drift noise, and spike noise. These correspond to the most common sources of error in ADS-B data and collectively simulate disturbances that occur during data acquisition, transmission, and decoding. The experiment procedure is shown in Figure 7.

Gaussian noise simulates random measurement errors affecting ADS-B signals during reception or localization such as GNSS range errors, multipath propagation, or receiver thermal noise resulting in small position fluctuations. It is implemented by adding Gaussian perturbations to each coordinate dimension of the baseline trajectories. Drift noise represents time-dependent cumulative deviations

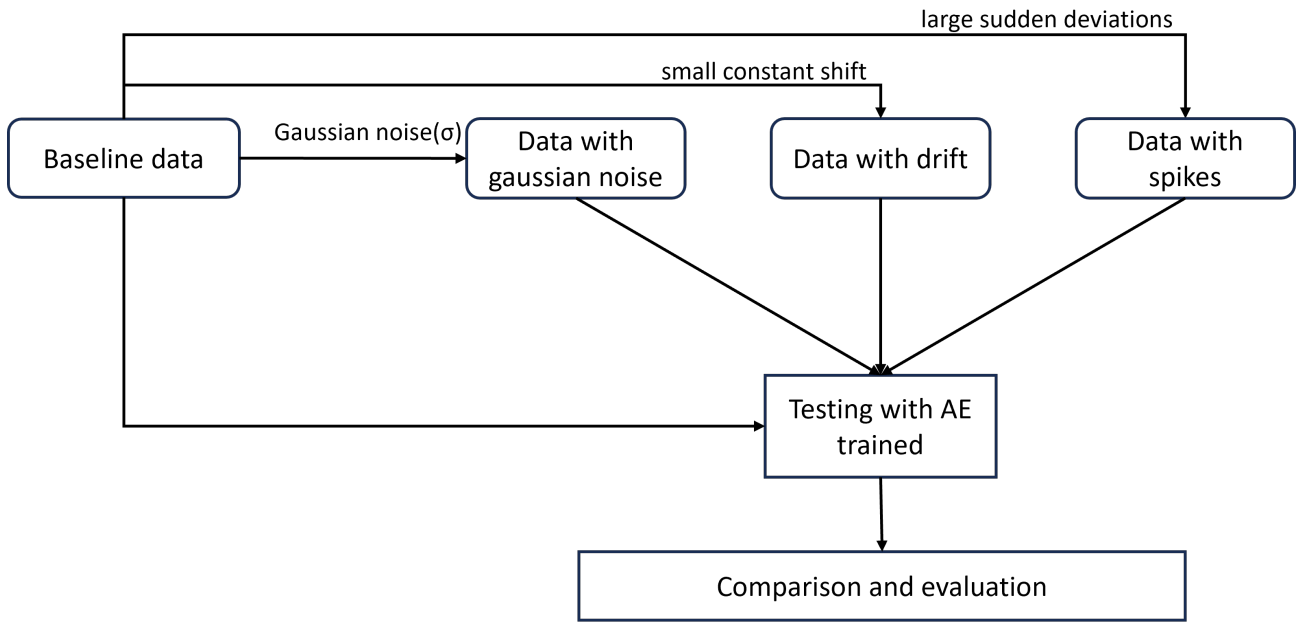

Figure 7. Experimental Flowchart for Evaluating Reconstruction Performance of AE Model

caused by positioning or clock synchronization errors, commonly manifested as gradual longitude or latitude shifts over time. This type of error may originate from GNSS reference drift, sensor calibration bias, or timestamp misalignment. It is simulated by superimposing a small linear offset proportional to time on the trajectory coordinates. Spike noise corresponds to sporadic outliers or sudden jumps in ADS-B messages, such as decoding errors, packet loss, or transient interference leading to abrupt changes in altitude or speed. In the experiment, random subsets of points were selected from each trajectory and perturbed with sudden amplitude changes of random magnitude. Each of the three noise types was configured with multiple intensity levels to observe how varying magnitudes of error affect model performance. Gaussian noise causes overall jitter while preserving trajectory shape; drift noise induces gradual spatial displacement over time; and spike noise introduces localized abrupt deviations.

The resulting noisy trajectories thus possess controlled and interpretable noise characteristics, closely corresponding to realistic ADS-B error patterns and providing a solid foundation for robustness analysis of the AE model.

4.4 Metrics and Results

To quantitatively evaluate the AE model's reconstruction robustness, the Root Mean Squared Error (RMSE) was adopted as the primary evaluation metric, measuring the overall deviation between the reconstructed and the true noisy trajectories.

For each noise type, experiments were conducted under multiple noise intensity parameters, and the RMSE distribution for each condition was recorded. All tests were performed using the same AE model configuration to ensure that performance variations stem solely from noise perturbations. To enhance statistical reliability, each experiment was repeated 10 times, and the results were averaged.

As shown in Figure 8, the results indicate that: In the Gaussian noise group, increasing the noise level (σ) leads to a clear rise in RMSE and greater variance, suggesting high sensitivity to random high-frequency perturbations. In the drift noise group, RMSE increases slightly with stronger drift, but the overall growth remains slow, indicating that the AE model can capture the global trajectory trend and tolerate gradual cumulative deviations. In the spike noise group, RMSE shows the smallest fluctuations and remains nearly stable, rising only slightly when the spike probability is high, implying that occasional outliers have limited effect on overall reconstruction.

In summary, the AE model is most sensitive to Gaussian-type random noise, while showing greater tolerance to drift and spike noise. This suggests that, during the ADS-B data cleaning stage, attention should focus on smoothing and reducing high-frequency noise (e.g., localization jitter or measurement fluctuation). In contrast, short-term anomalies or mild drifts can often be mitigated by the model itself. Therefore, noise suppression strategies should emphasize smoothing filters and interpolation optimization, rather than excessive removal of local outliers, in order to preserve the structural integrity of trajectories.

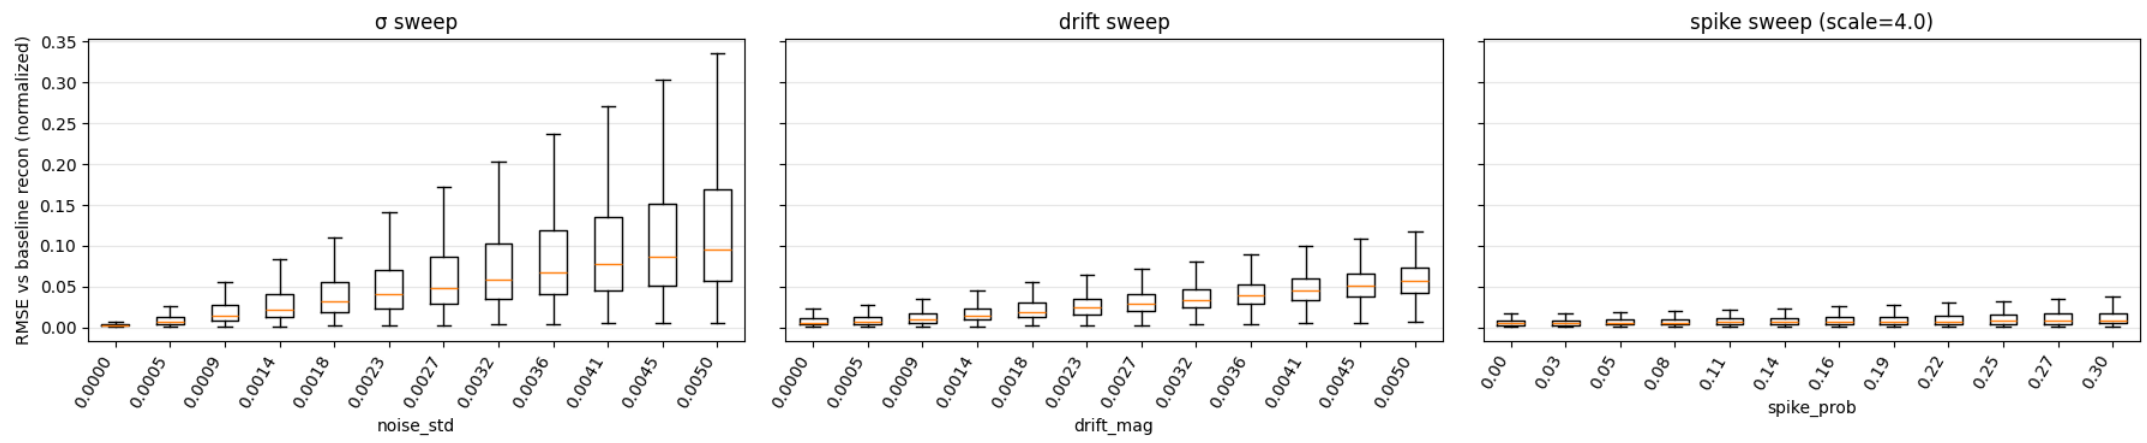

Figure 8. Impact of Different Noise Types on AE Reconstruction Performance: Boxplots of Normalized RMSE Between Baseline Reconstruction and Reconstruction of Data with Gaussian Noise (σ Sweep), Drift (Drift Sweep), and Spikes (Spike Sweep, Scale=4.0) - N=100 Trajectories, 100 Runs, T=100 Time Steps, Latent Dimension=16

4.5 Discussion

The choice of the AE as the analytical model was mainly motivated by its simple architecture, unsupervised learning capability, and strong performance in trajectory reconstruction tasks. However, it is important to note that the AE serves only as an illustrative example to reveal the relationship between noise and algorithmic performance. The impact of noise strongly depends on the model's structure and learning mechanism—models such as LSTM, CNN, or Kalman filters may demonstrate markedly different levels of robustness. Future research will therefore extend the comparative analysis to various model architectures to derive more generalizable conclusions. Similarly, regarding evaluation metrics, while RMSE effectively measures reconstruction accuracy, additional indicators such as temporal consistency, structural similarity, and feature preservation rate may be introduced in future work to better assess performance in trajectory prediction, classification, or anomaly detection tasks. Moreover, since the AE model requires a fixed input dimension, this study did not further investigate the effect of missing-value errors on reconstruction performance, which is typically addressed by interpolation or resampling techniques during data cleaning. Future studies can incorporate different data imputation strategies within this framework for comparative analysis.

In conclusion, the experiments and analyses in this chapter validate the AE model's reconstruction behavior under various noise conditions, providing empirical evidence for understanding how data quality influences algorithmic performance. Future research will build upon this work by expanding the range of model types, evaluation metrics, and noise modeling complexity, ultimately establishing a comprehensive and interpretable evaluation framework for assessing the impact of ADS-B data cleaning on downstream algorithmic performance.

5. Conclusion

In this paper, we reviewed key application domains of ADS-B data, from trajectory modeling and prediction to methodology, simulation and policy. We outlined the major cleaning procedures, including outlier removal, interpolation, resampling, and smoothing. Using an autoencoder-based case study, we quantitatively assessed how different noise types (Gaussian, drift, and spikes) affect trajectory reconstruction, which indicates, for AE-based reconstruction models, noise suppression in the data cleaning stage should prioritize smoothing or interpolation optimization rather than excessive removal of local outliers, in order to preserve the overall trajectory structure. Future research will further extend the evaluation to multiple algorithm types and performance metrics, aiming to establish a more systematic framework for analyzing the impact of data quality on downstream result.

References

[1] Yuejingyan Wang, Liang Zhao, Yuyang Jia, and Kaiquan Cai. "A Performance Learning Method for Aircraft Trajectory Modeling". In: *2021 IEEE/AIAA 40th Digital Avionics Systems Conference (DASC)*. IEEE. 2021, pp. 1–7.

[2] Samantha J. Corrado, Tejas G. Puranik, Olivia Pinon Fischer, and Dimitri N. Mavris. "A Clustering-Based Quantitative Analysis of the Interdependent Relationship Between Spatial and Energy Anomalies in ADS-B Trajectory Data". In: *Transportation Research Part C: Emerging Technologies* 131 (2021), p. 103331.

[3] Martin Schlosser, Hannes Braßel, and Hartmut Fricke. "Analysis of Aircraft Ground Trajectories: Map-Matching with Open Source Data for Modeling Safety-Driven Applications". In: *Proceedings of the 11th International Conference on Research in Air Transportation (ICRAT 2024), Singapore*. 2024.

[4] Yash Guleria, Sameer Alam, Max Z. Li, et al. "A Machine Learned Traffic Flow Coordination Framework for Flow-Centric Airspace". In: *Preprint* (). Manuscript status not specified.

[5] H. Mohd Noh, G. A. Rodrigo, N. A. Abdul Rahman, S. Ismail, M. A. Shafie, M. W. Zainal Abidin, A. A. Ahmad, R. Basit, A. Khalid, N. H. R. Yahaya, et al. "Aviation Gas Turbine Engine Emissions: Drop-In Alternative Fuel and Its Challenges". In: *IOP Conference Series: Materials Science and Engineering*. Vol. 370. 1. IOP Publishing. 2018, p. 012036.

[6] Esther Roosenbrand, Junzi Sun, and Jacco Hoekstra. "Contrail Altitude Estimation Based on Shadows Detected in Landsat Imagery". In: *Proceedings of the 13th SESAR Innovation Days, Sevilla, Spain*. 2023.

[7] Internation Civil Aviation Organization. *Destruction of Korean Air Lines Boeing 747 on 31 August 1983*. Ref. LE 4/19.4 - 93/68. Montreal, 1993.

[8] Xavier Olive, Jan Krummen, Benoit Figuet, and Richard Alligier. "Filtering Techniques for ADS-B Trajectory Preprocessing". In: *Journal of Open Aviation Science* 2.2 (2024).

[9] Internation Civil Aviation Organization. "Eleventh Air Navigation Conference". In: *Eleventh Air Navigation Conference*. AN-Conf/11-WP/190. Montreal: ICAO, 2003.

[10] Victor Monzonis Melero, Juan V Balbastre, and Alex Ganau. "SATERA Baseline: Identifying the Challenges of Space-Based Multilateration Systems". In: *2024 SESAR Innovation days* (2024).

[11] Matthias Sch"afer, Martin Strohmeier, Vincent Lenders, Ivan Martinovic, and Matthias Wilhelm. "Bringing up OpenSky: A large-scale ADS-B sensor network for research". In: *IPSN-14 proceedings of the 13th international symposium on information processing in sensor networks*. IEEE. 2014, pp. 83–94.

[12] Gui Xuhao, Zhang Junfeng, and Peng Zihan. "Trajectory clustering for arrival aircraft via new trajectory representation". In: *Journal of Systems Engineering and Electronics* 32.2 (2021), pp. 473–486.

[13] Zhengyi Wang, Man Liang, and Daniel Delahaye. "Short-term 4D Trajectory Prediction Using Machine Learning Methods". In: *7th SESAR Innovation Days (SID 2017)*. 2017.

[14] Zhengyi Wang, Man Liang, and Daniel Delahaye. "A hybrid machine learning model for short-term estimated time of arrival prediction in terminal manoeuvring area". In: *Transportation Research Part C: Emerging Technologies* 95 (2018), pp. 280–294.

[15] Luis Basora, Valentin Courchelle, Judicaël Bedouet, and Thomas Dubot. "Occupancy peak estimation from sector geometry and traffic flow data". In: *Proceedings of the 8th SESAR Innovation Days, Salzburg, Austria* (2018), pp. 3–7.

[16] Daniel Delahaye, Chunyao Ma, Sameer Alam, and Qing Cai. "Air traffic flow representation and prediction using transformer in flow-centric airspace". In: *SESAR Innovation Days*. 2022.

[17] Alberto Bonifazi, Junzi Sun, Gerben van Baren, and Jacco Hoekstra. "Modeling and Detecting Anomalous Safety Events in Approach Flights Using ADS-B Data". In: *Proceedings of the*

Fourteenth USA/Europe Air Traffic Management Research and Development Seminar (ATM2021), Virtual Event. 2021, pp. 20–23.

[18] R Conrad Rorie and Casey L Smith. "Detect and Avoid and Collision Avoidance Flight Test Results with ACAS Xr". In: *2024 AIAA DATC/IEEE 43rd Digital Avionics Systems Conference (DASC)*. IEEE. 2024, pp. 01–10.

[19] Yi Zhang, Sheng Zhang, Yicheng Zhang, and Yifang Yin. "A study of TMA aircraft conflict-free routing and operation: With mixed integer linear programming, multi-agent path finding, and metaheuristic-based neighborhood search". In: *IEEE Transactions on Intelligent Transportation Systems* 25.10 (2024), pp. 13976–13990.

[20] Jie Bao, Zijie Zhang, Junfeng Zhang, Yixuan Chen, and Xuhao Gui. "Exploring the conflict risk characteristics of air weaving sections in Metroplex terminal areas with flight trajectory data and adaptive graph spatial-temporal transformer". In: *Journal of Air Transport Management* 120 (2024), p. 102667.

[21] Junzi Sun, Jacco M Hoekstra, and Joost Ellerbroek. "Aircraft drag polar estimation based on a stochastic hierarchical model". In: *Eighth SESAR innovation days* (2018), pp. 1–8.

[22] Michael Schultz, Judith Rosenow, and Xavier Olive. "Data-driven airport management enabled by operational milestones derived from ADS-B messages". In: *Journal of Air Transport Management* 99 (2022), p. 102164.

[23] Richard Alligier. "Predictive distribution of mass and speed profile to improve aircraft climb prediction". In: *Journal of Air Transportation* 28.3 (2020), pp. 114–123.

[24] Asma Tabassum, Nicholas Allen, and William Semke. "ADS-B message contents evaluation and breakdown of anomalies". In: *2017 IEEE/AIAA 36th Digital Avionics Systems Conference (DASC)*. IEEE. 2017, pp. 1–8.

[25] Sebastian Wandelt, Xiaoqian Sun, and Hartmut Fricke. "Ads-bi: Compressed indexing of ads-b data". In: *IEEE Transactions on Intelligent Transportation Systems* 19.12 (2018), pp. 3795–3806.

[26] Enrico Spinielli, Rainer Koelle, Massimiliano Zanin, and Seddik Belkoura. "Initial implementation of reference trajectories for performance review". In: *Proceedings of the 7th SESAR innovation days. Belgrade (Serbia)* (2017).

[27] Junzi Sun, Aidana Tassanbi, Piotrek Obojski, and Philip Plantholt. "Evaluating Transatlantic Flight Emissions and Inefficiencies Using Space-Based ADS-B Data". In: *Proceedings of the 13th SESAR Innovation Days, Sevilla, Spain*. 2023, pp. 27–30.

[28] Aymeric Cretin, Bruno Legeard, Fabien Peureux, and Alexandre Vernotte. "Increasing the resilience of ATC systems against false data injection attacks using DSL-based testing". In: *International Conference on Research in Air Transportation*. 2018.

[29] Suleman Khan, Joakim Thorn, Alex Wahlgren, and Andrei Gurtov. "Intrusion detection in automatic dependent surveillance-broadcast (ADS-B) with machine learning". In: *2021 IEEE/AIAA 40th Digital Avionics Systems Conference (DASC)*. IEEE. 2021, pp. 1–10.

[30] Peter Mehlitz, Dimitra Giannakopoulou, and Nastaran Shafiei. "Analyzing airspace data with race". In: *2019 IEEE/AIAA 38th Digital Avionics Systems Conference (DASC)*. IEEE. 2019, pp. 1–10.

[31] Tatjana Bolic, Andrew Cook, Rainer Koelle, Enrico Spinielli, Quinten Goens, and Martin Strohmeier. "Roadmap for a European open science alliance for ATM research". In: *European Journal of Transport and Infrastructure Research* 24.4 (2024), pp. 18–40.

[32] Asma Tabassum, Nicholas Allen, and William Semke. "ADS-B message contents evaluation and breakdown of anomalies". In: *2017 IEEE/AIAA 36th Digital Avionics Systems Conference (DASC)*. 2017, pp. 1–8. DOI: 10.1109/DASC.2017.8102001.

[33] Matthias Schäfer, Martin Strohmeicr, Matthew Smith, Markus Fuchs, Vincent Lenders, and Ivan Martinovic. "OpenSky Report 2018: Assessing the Integrity of Crowdsourced Mode S and ADS-B Data". In: *2018 IEEE/AIAA 37th Digital Avionics Systems Conference (DASC)*. 2018, pp. 1–9. DOI: 10.1109/DASC.2018.8569833.

[34] Xavier Olive, Jan Krummen, Benoit Figuet, and Richard Alligier. "Filtering Techniques for ADS-b Trajectory Preprocessing". In: *Journal of Open Aviation Science* 2.2 (Mar. 2025). DOI: 10.59490/joas.2024.7882.

[35] Imen Dhief, Sameer Alam, Chan Chea Mean, and Nimrod Lilith. "A Tree-based Machine Learning Model for Go-around Detection and Prediction". In: *Proceedings 11th SESAR Innovation Days* (2021).

[36] Martin Lindner, Thomas Zeh, Hannes Braßel, and Hartmut Fricke. "Aircraft performance-optimized departure flights using traffic flow funnels". In: *Proceedings of the Fourteenth USA/Europe Air Traffic Management Research and Development Seminar (ATM2021), Virtual Event*. 2021, pp. 20–23.

[37] Junzi Sun, Joost Ellerbroek, and Jacco M Hoekstra. "WRAP: An open-source kinematic aircraft performance model". In: *Transportation Research Part C: Emerging Technologies* 98 (2019), pp. 118–138.

[38] Hesam Shafienya and Amelia C Regan. "4D flight trajectory prediction using a hybrid Deep Learning prediction method based on ADS-B technology: A case study of Hartsfield–Jackson Atlanta International Airport (ATL)". In: *Transportation Research Part C: Emerging Technologies* 144 (2022), p. 103878.

[39] Seokbin Yoon and Keumjin Lee. "Improving Aircraft Trajectory Prediction Accuracy with Over-sampling Technique". In: *2023 IEEE/AIAA 42nd Digital Avionics Systems Conference (DASC)*. 2023, pp. 1–6. DOI: 10.1109/DASC58513.2023.10311324.

[40] "Automated data-driven prediction on aircraft Estimated Time of Arrival". In: *Journal of Air Transport Management* 88 (2020), p. 101840. ISSN: 0969-6997.

[41] RW Vos, Junzi Sun, and JM Hoekstra. "A Transformer-based Trajectory Prediction Model to Support Air Traffic Demand Forecasting". In: (2024).

[42] "Data-driven airport management enabled by operational milestones derived from ADS-B messages". In: *Journal of Air Transport Management* 99 (2022), p. 102164. ISSN: 0969-6997.

[43] Xavier Olive, Jeremy Grignard, Thomas Dubot, and Julie Saint-Lot. "Detecting controllers' actions in past mode S data by autoencoder-based anomaly detection". In: *SID 2018, 8th SESAR Innovation Days*. 2018.

[44] "Exploring the conflict risk characteristics of air weaving sections in Metroplex terminal areas with flight trajectory data and adaptive graph spatial-temporal transformer". In: *Journal of Air Transport Management* 120 (2024), p. 102667. ISSN: 0969-6997. DOI: https://doi.org/10.1016/j.jairtraman.2024.102667.

[45] Fei Lu, Zichen Chen, and Huiyu Chen. "Lateral collision risk assessment of parallel routes in ocean area based on space-based ADS-B". In: *Transportation Research Part C: Emerging Technologies* 124 (2021), p. 102970. ISSN: 0968-090X. DOI: https://doi.org/10.1016/j.trc.2021.102970. URL: https://www.sciencedirect.com/science/article/pii/S0968090X21000085.

[46] Andrew M Churchill and Michael Bloem. "Clustering aircraft trajectories on the airport surface". In: *Proceedings of the 13th USA/Europe Air Traffic Management Research and Development Seminar, Chicago, IL, USA*. 2019, pp. 10–13.

[47] Xinting Zhu, Ning Hong, Fang He, Yu Lin, Lishuai Li, and Xiaowen Fu. "Predicting aircraft trajectory uncertainties for terminal airspace design evaluation". In: *Journal of Air Transport Management* 113 (2023), p. 102473. ISSN: 0969-6997. DOI: https://doi.org/10.1016/j.jairtraman.2023.102473. URL: https://www.sciencedirect.com/science/article/pii/S0969699723001163.

[48] Zouhair Mahboubi and Mykel J. Kochenderfer. "Learning Traffic Patterns at Small Airports From Flight Tracks". In: *IEEE Transactions on Intelligent Transportation Systems* 18.4 (2017), pp. 917–926. DOI: 10.1109/TITS.2016.2598064.

[49] Richard Alligier and David Gianazza. "Learning aircraft operational factors to improve aircraft climb prediction: A large scale multi-airport study". In: *Transportation research part C: emerging technologies* 96 (2018), pp. 72–95.

[50] Yingli Liu, Minghua Hu, Jianan Yin, Jiaming Su, and Peiran Qiao. "Adaptive airport taxiing rule management: Design, assessment, and configuration". In: *Transportation Research Part C: Emerging Technologies* 163 (2024), p. 104652. ISSN: 0968-090X. DOI: https://doi.org/10.1016/j.trc.2024.104652. URL: https://www.sciencedirect.com/science/article/pii/S0968090X24001736.

[51] Xavier Olive. "Traffic, a toolbox for processing and analysing air traffic data". In: *Journal of Open Source Software* 4.39 (2019), pp. 1518–1.