


Mains Connections

KEY wire colours and size


Live		Br 18 awg silicone
Neutral		BL 18 awg silicone
Earth		Gr 18 awg silicone

See dry Box wiring
Use the cable in the IEC

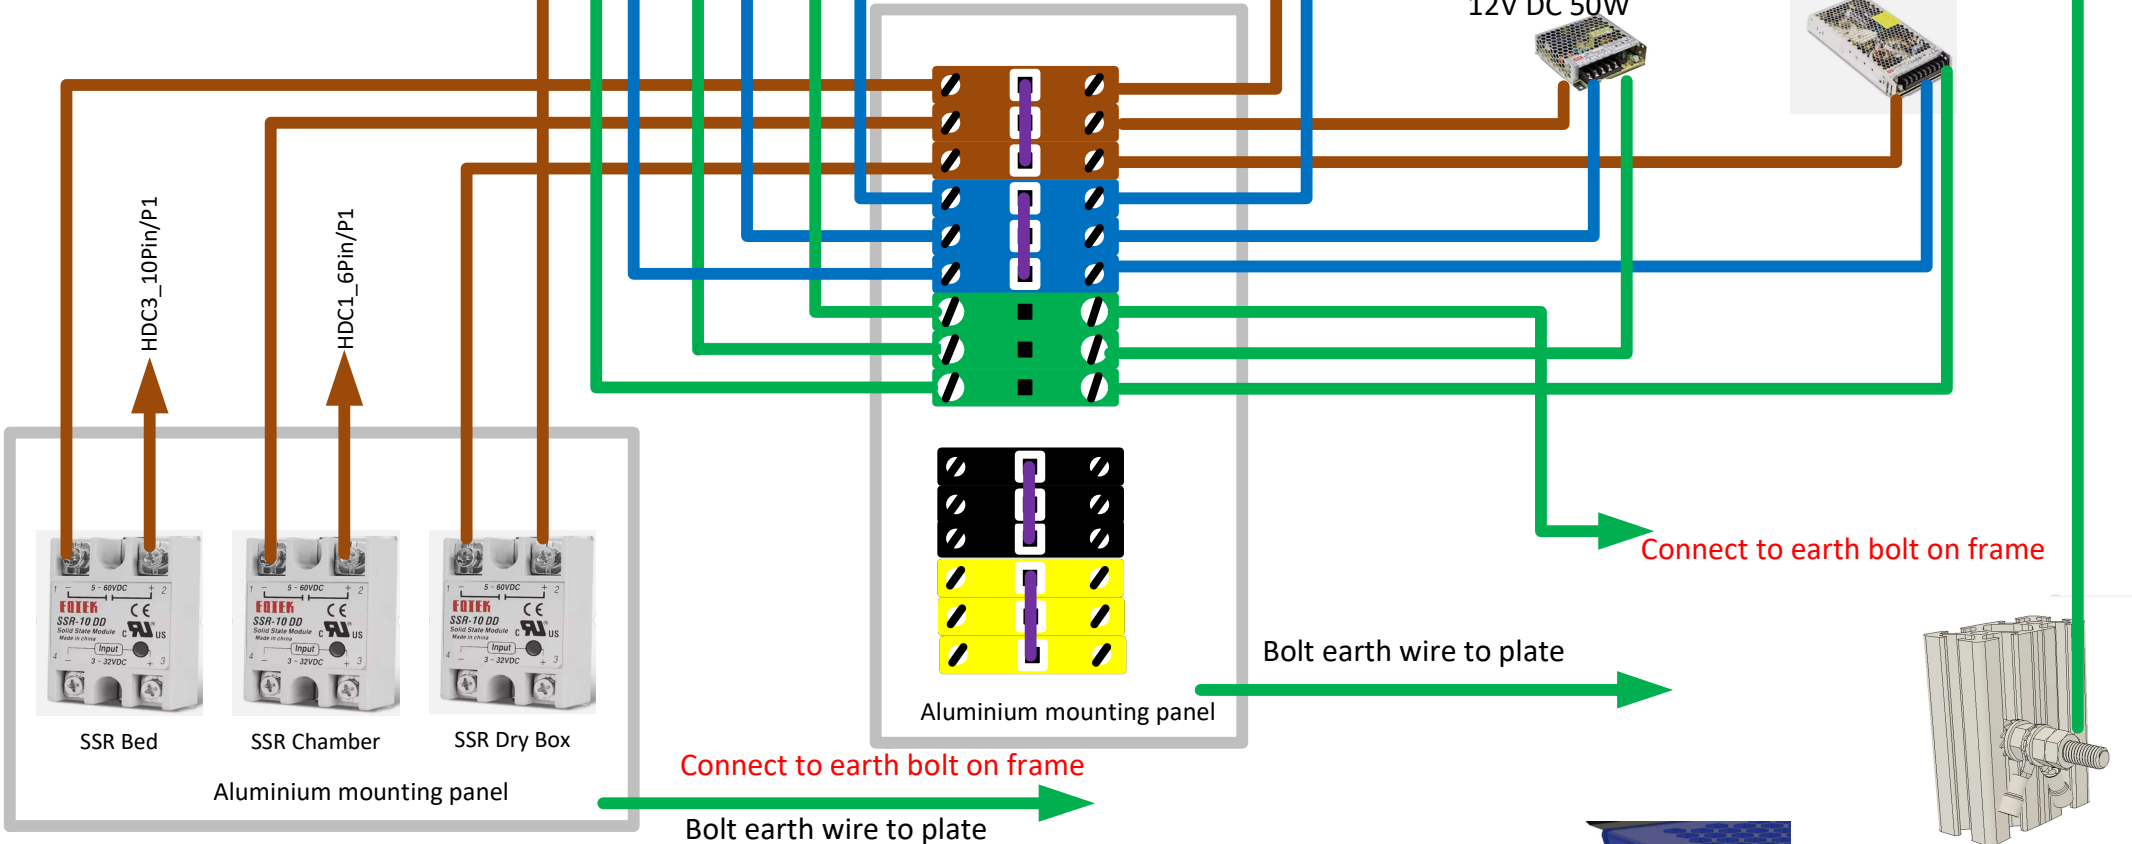

Notes:

Make sure the shorting bars (in Purple) across the terminals are only 3 units wide
Use ring crimps on the SSR connections (4mm id)
Use a small amount of heatsink compound between SSR and Aluminium plate
Sleeve mains cable



Earth connection to plates

