


# STM32F1 Dev Board

## Power Supply

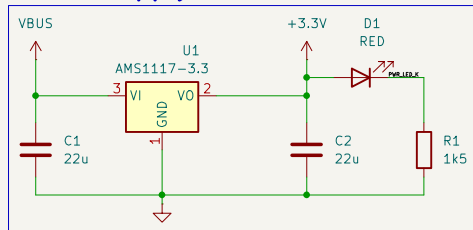


VBUS from USB connector (nom. +5V) Min. 22uF inp./outp. caps

## Mounting Holes

- H1 MountingHole
- H2 MountingHole
- H3 MountingHole
- H4 MountingHole

M2

## Microcontroller (and USB)

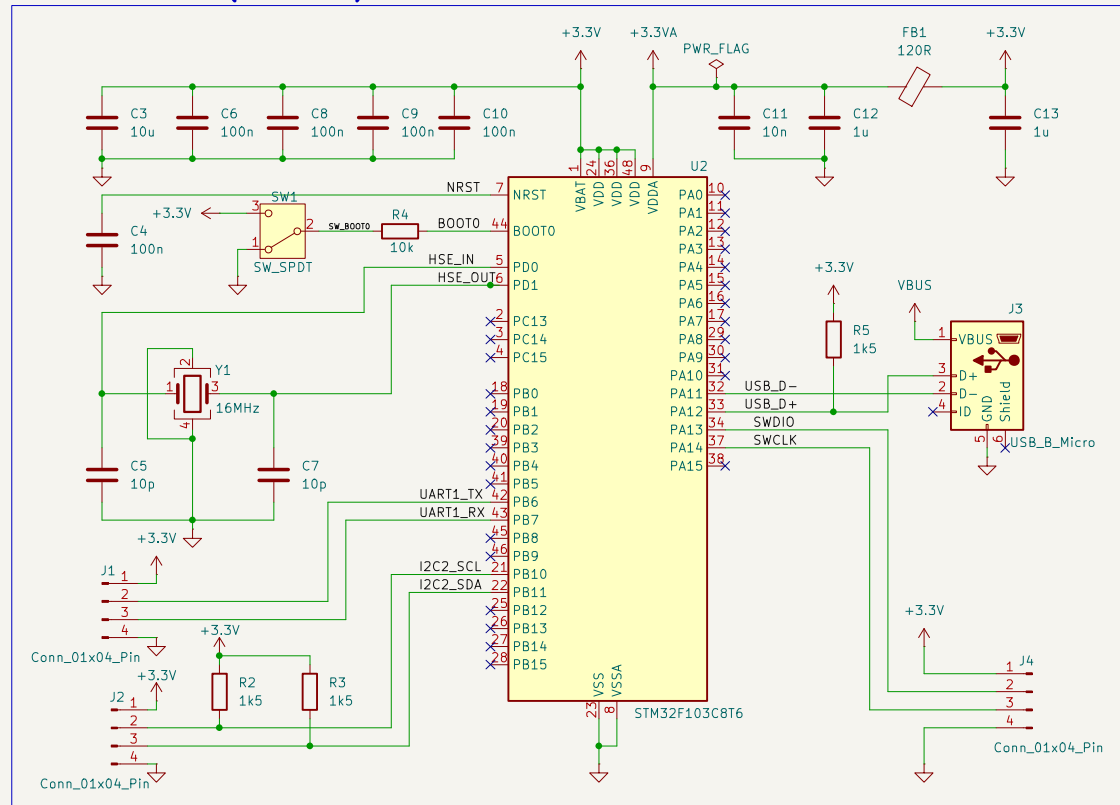

Pin-out using STM32CubeIDE