
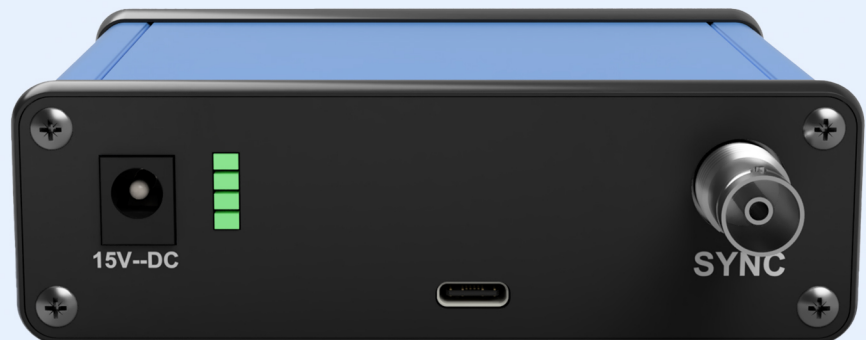


Photonic Data Acquisition System

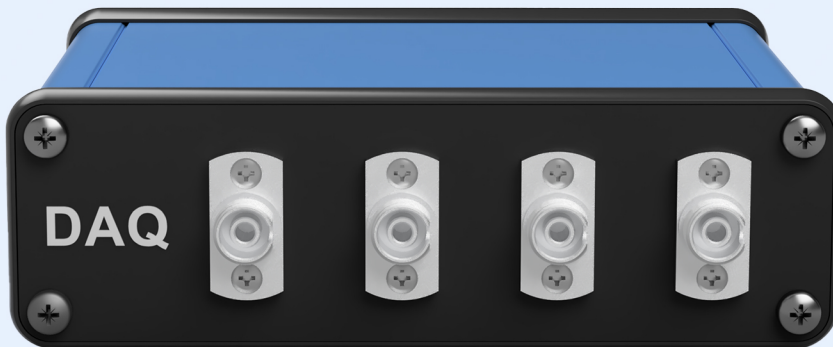

Features :

- Quad channel
- InGaAs or Si Photodiodes
- High dynamic range (60 dB +)
- Low noise
- True simultaneous sampling
- Deep memory

Applications:

- PIC Testing and Characterization
- Scanning imaging microscopy
- Optical Automation and Control




Optical Specifications

Connector Type	FC-PC
Sensor Type	InGaAs wide area detector
Spectral range (λ)	800 nm – 1700 nm
Transimpedance amplifier type	Logarithmic
Noise floor	100 pW
Log conformance (0.15 dB)	1 nW to 1 mW
Uncertainty	0.2 dB
Return Loss	-45 dB
Optical Saturation Power	5 mW
Optical Damage Threshold	20 mW

Electrical Specifications

Sampling Rate	1 Hz – 50 kHz (user defined)
Sensor Reading Resolution	16 bit
Memory Depth	32 MB
Data connector type	USB - C
Sync Trigger Connector	BNC
Power supply (included)	15V – 2A DC
LED Indicator	4x Green
Software	User Interface + Python API

Wavelength responsivity

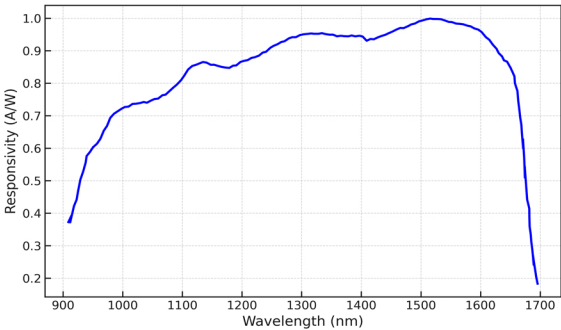

1

2

3

4

5

6

Mechanical Drawings - All dimensions in mm

A

A

B

B

C

C

D

D

E

E

F


F

G

G


H

H

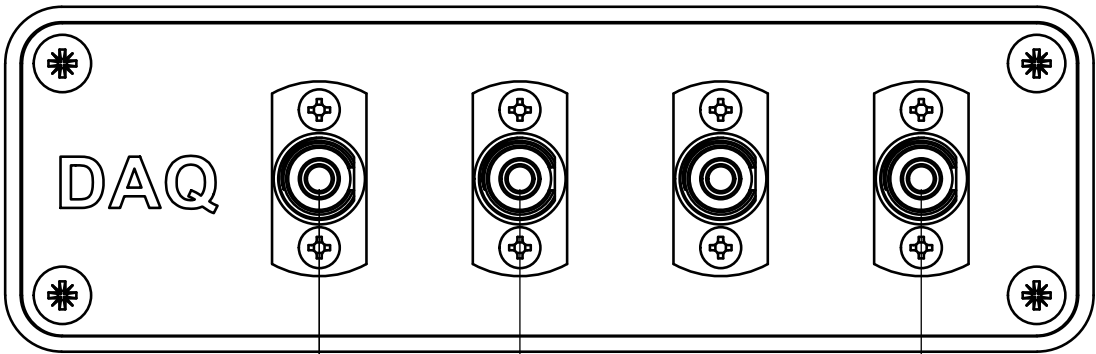

19.57

58.71



86

10.52

106.13

1

2

3

4

5

6