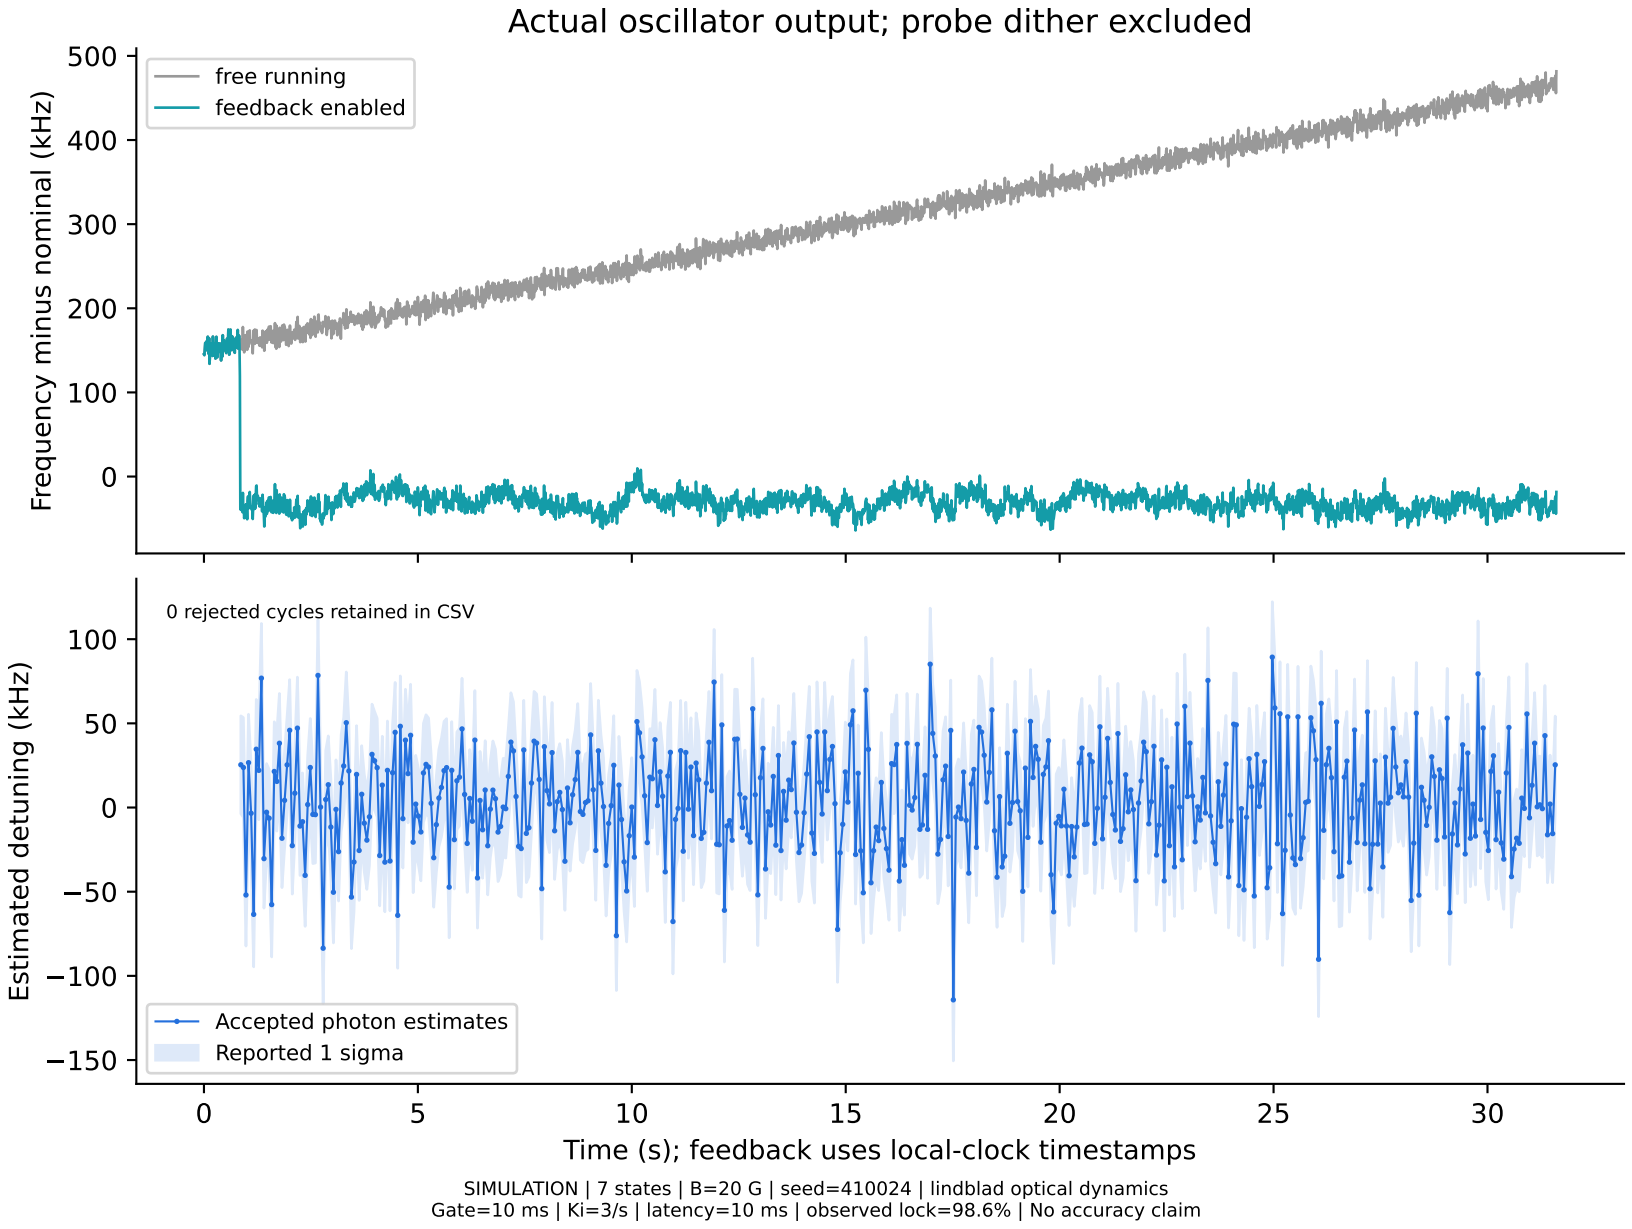

Actual oscillator output; probe dither excluded
free running
feedback enabled
Frequency minus nominal (kHz)
500
400
300
200
100
0
0 rejected cycles retained in CSV
Estimated detuning (kHz)
100
50
0
−50
−100
−150
Accepted photon estimates
Reported 1 sigma
0
5
10
15
20
25
30
Time (s); feedback uses local-clock timestamps
SIMULATION | 7 states | B=20 G | seed=410024 | lindblad optical dynamics
Gate=10 ms | Ki=3/s | latency=10 ms | observed lock=98.6% | No accuracy claim