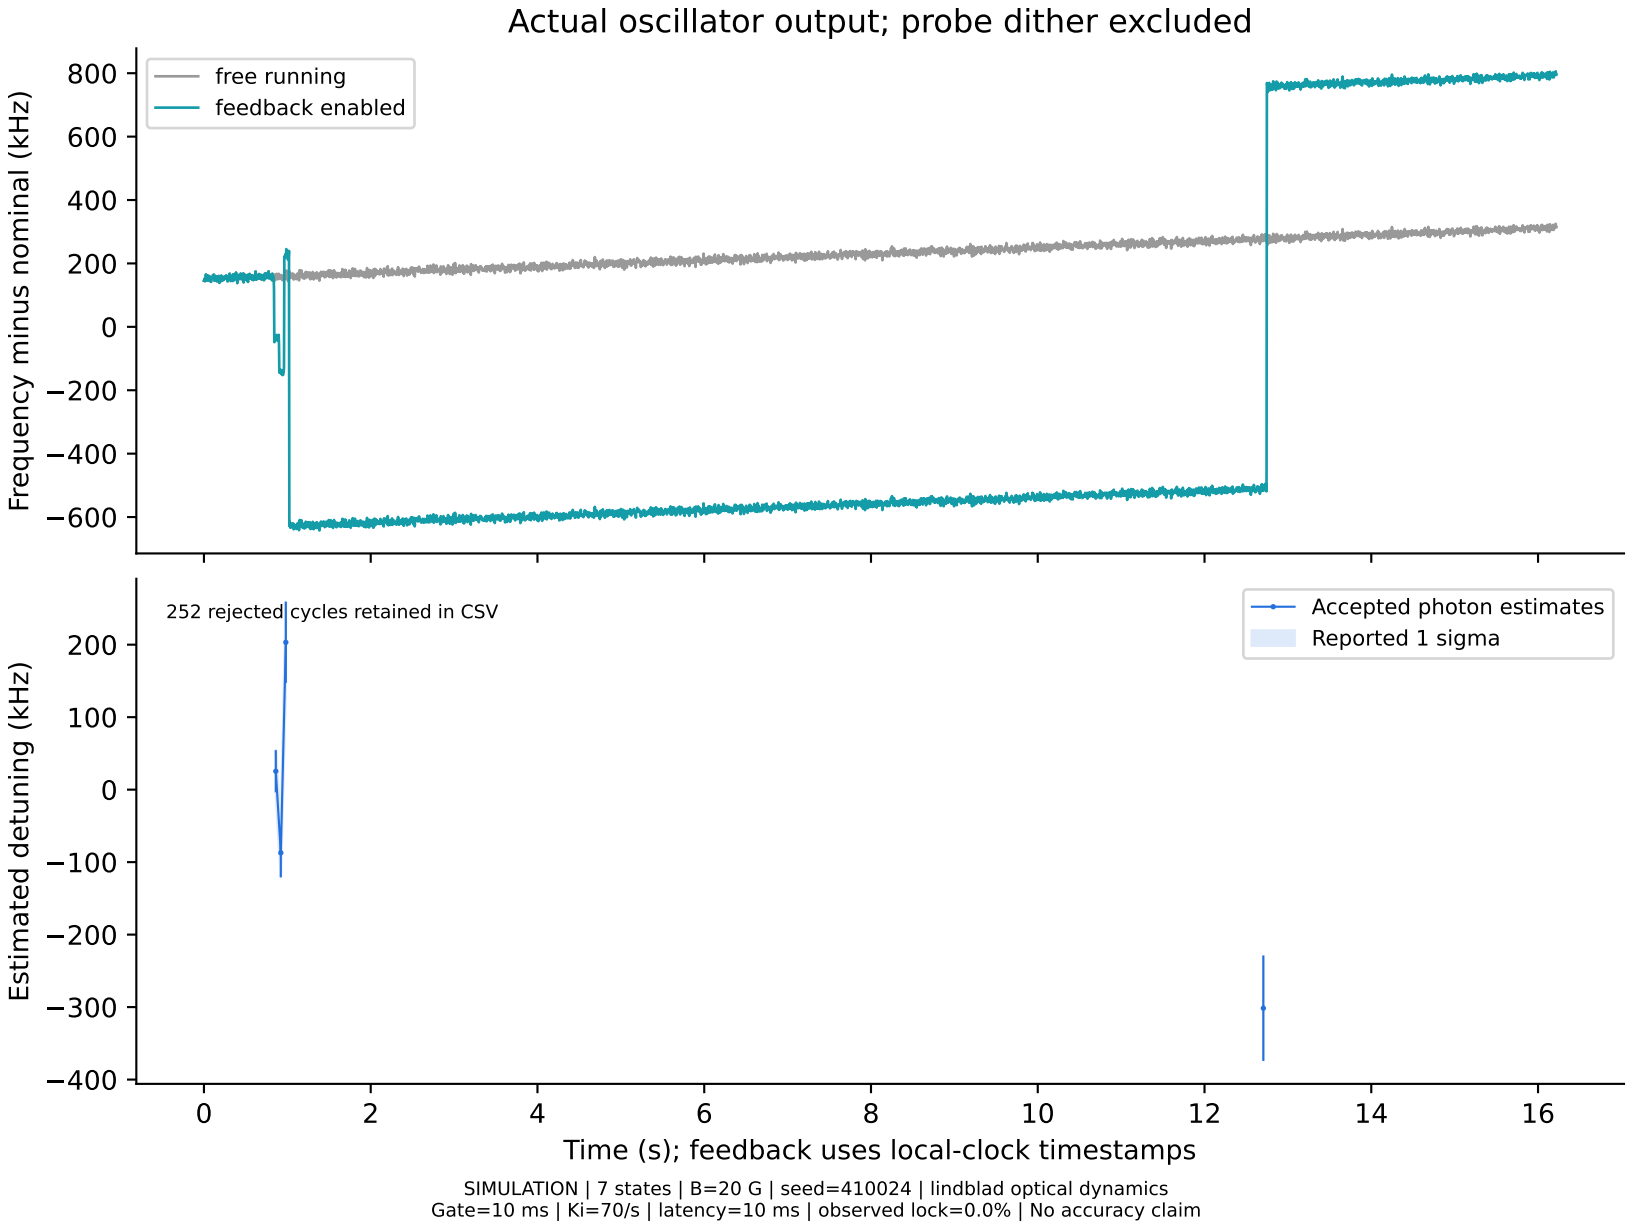

Actual oscillator output; probe dither excluded
free running
feedback enabled
Frequency minus nominal (kHz)
800
600
400
200
0
−200
−400
−600
252 rejected cycles retained in CSV
Accepted photon estimates
Reported 1 sigma
Estimated detuning (kHz)
200
100
0
−100
−200
−300
−400
0
2
4
6
8
10
12
14
16
Time (s); feedback uses local-clock timestamps
SIMULATION | 7 states | B=20 G | seed=410024 | lindblad optical dynamics
Gate=10 ms | Ki=70/s | latency=10 ms | observed lock=0.0% | No accuracy claim