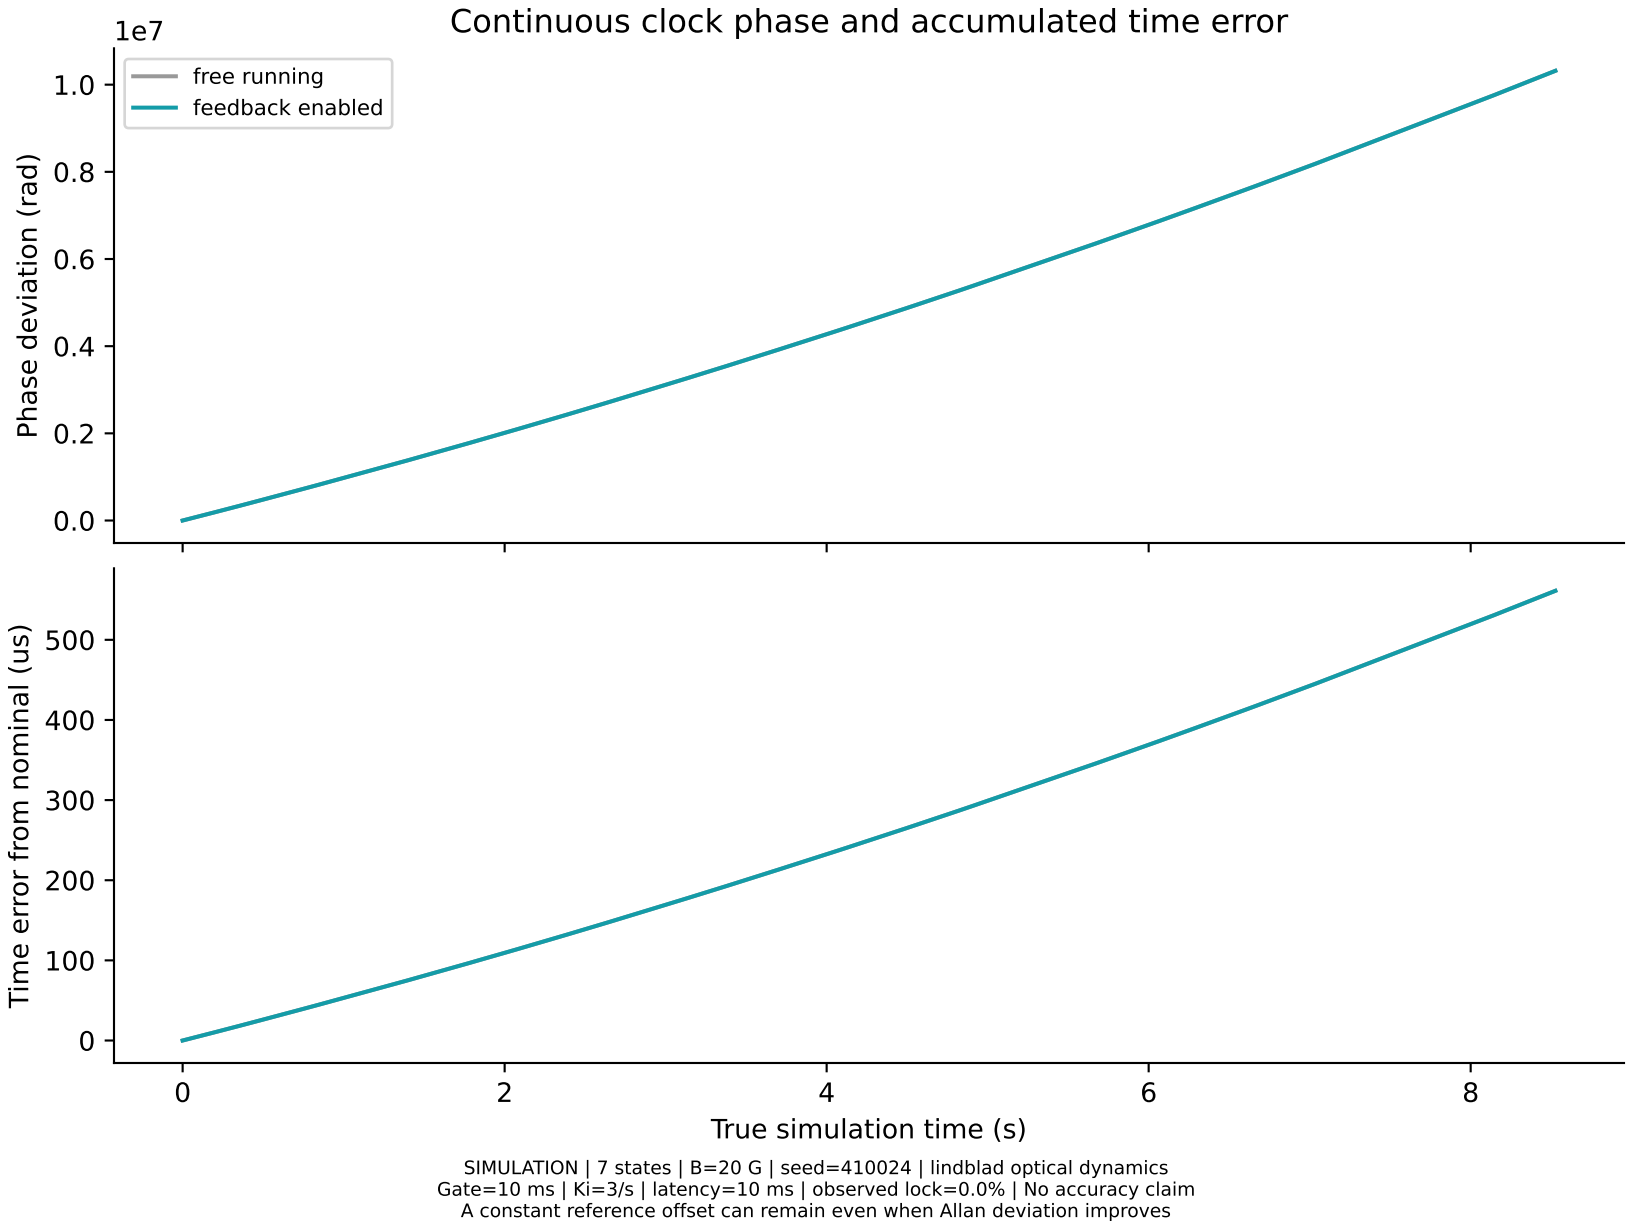
Continuous clock phase and accumulated time error
1e7
free running
feedback enabled
Phase deviation (rad)
1.0
0.8
0.6
0.4
0.2
0.0
Time error from nominal (us)
500
400
300
200
100
0
0
2
4
6
8
True simulation time (s)
SIMULATION | 7 states | B=20 G | seed=410024 | lindblad optical dynamics
Gate=10 ms | Ki=3/s | latency=10 ms | observed lock=0.0% | No accuracy claim
A constant reference offset can remain even when Allan deviation improves