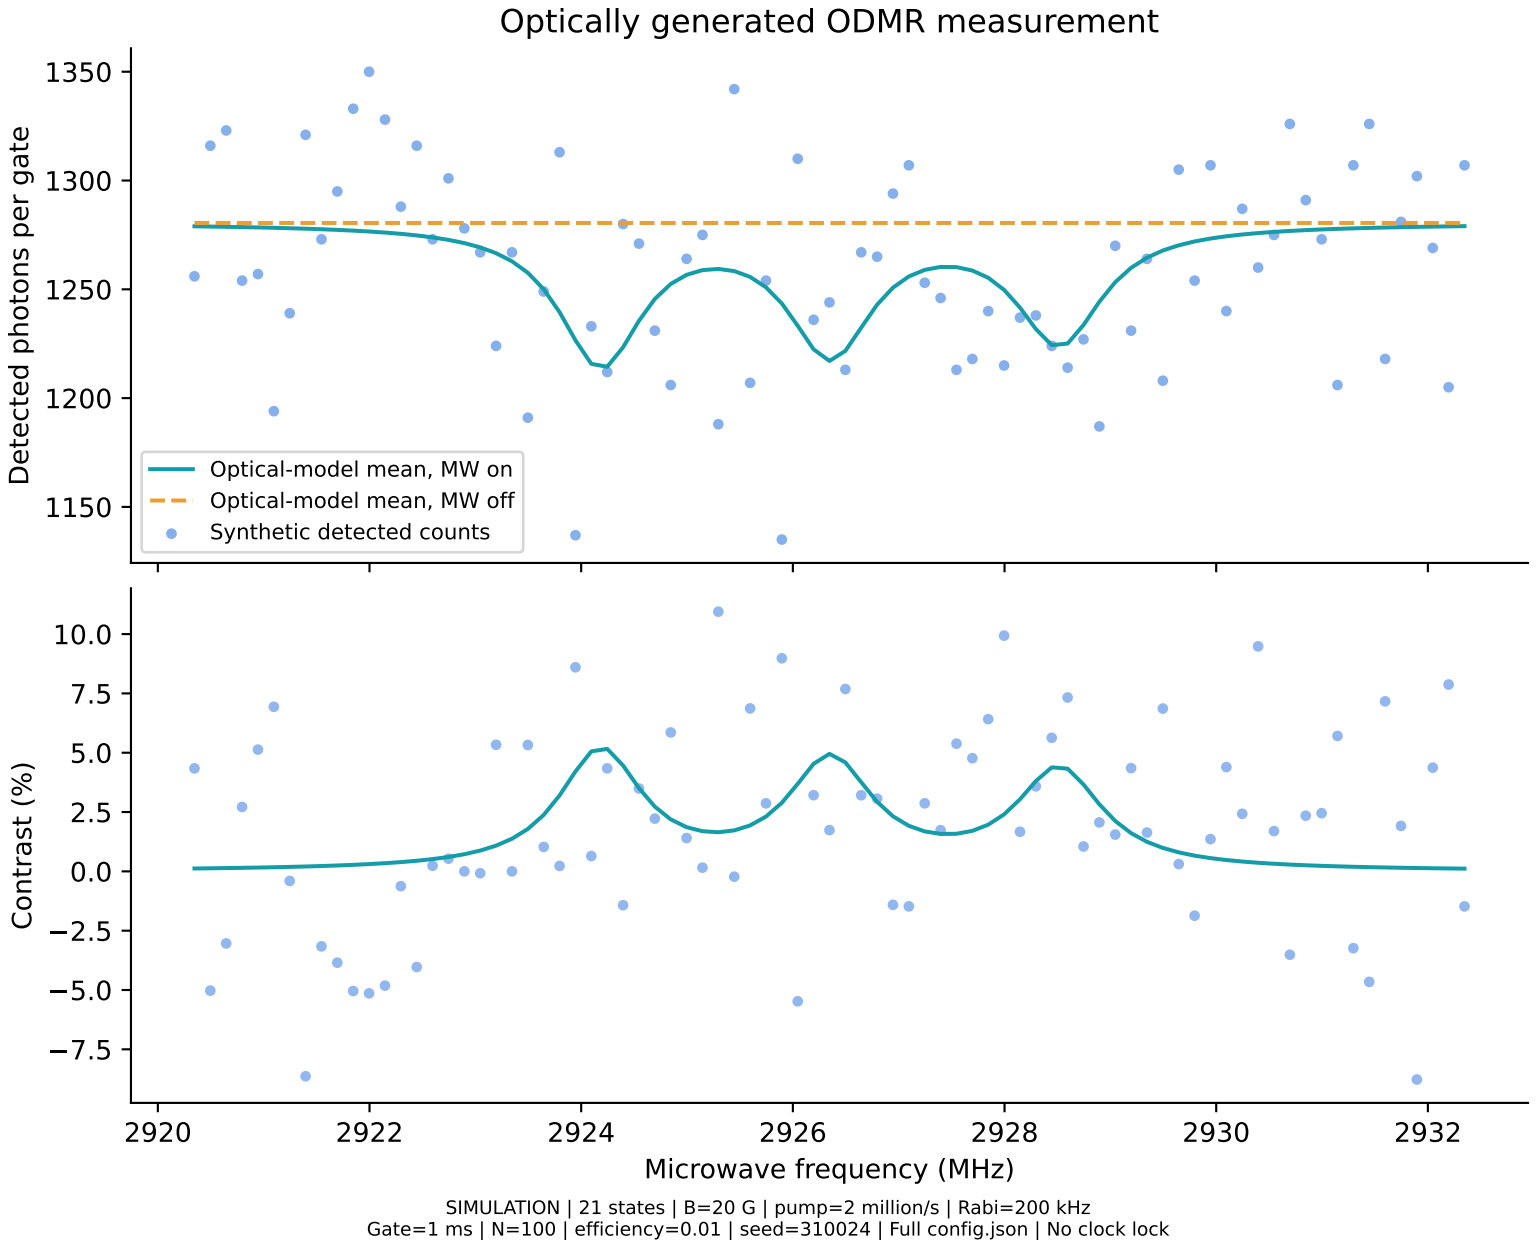
Optically generated ODMR measurement
Detected photons per gate
1350
1300
1250
1200
1150
Optical-model mean, MW on
Optical-model mean, MW off
Synthetic detected counts
Contrast (%)
10.0
7.5
5.0
2.5
0.0
−2.5
−5.0
−7.5
2920
2922
2924
2926
2928
2930
2932
Microwave frequency (MHz)
SIMULATION | 21 states | B=20 G | pump=2 million/s | Rabi=200 kHz
Gate=1 ms | N=100 | efficiency=0.01 | seed=310024 | Full config.json | No clock lock