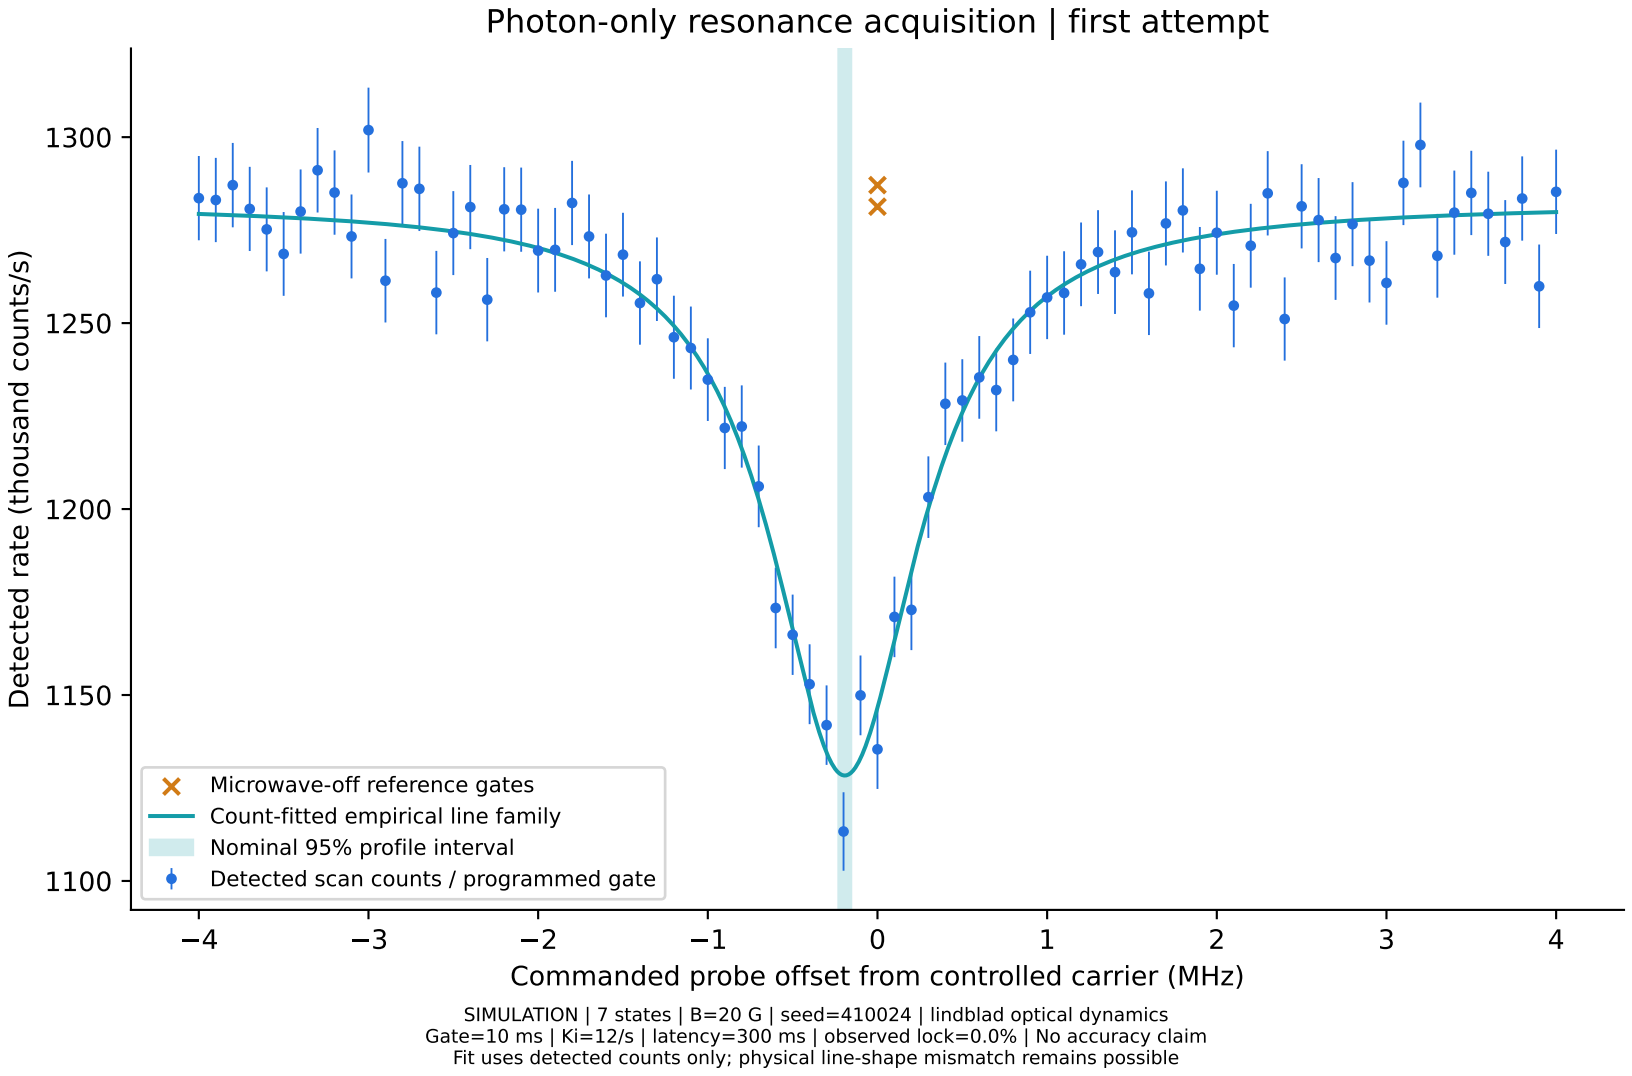
Photon-only resonance acquisition | first attempt
Detected rate (thousand counts/s)
1300
1250
1200
1150
1100
−4
−3
−2
−1
0
1
2
3
4
Commanded probe offset from controlled carrier (MHz)
Microwave-off reference gates
Count-fitted empirical line family
Nominal 95% profile interval
Detected scan counts / programmed gate
SIMULATION | 7 states | B=20 G | seed=410024 | lindblad optical dynamics
Gate=10 ms | Ki=12/s | latency=300 ms | observed lock=0.0% | No accuracy claim
Fit uses detected counts only; physical line-shape mismatch remains possible