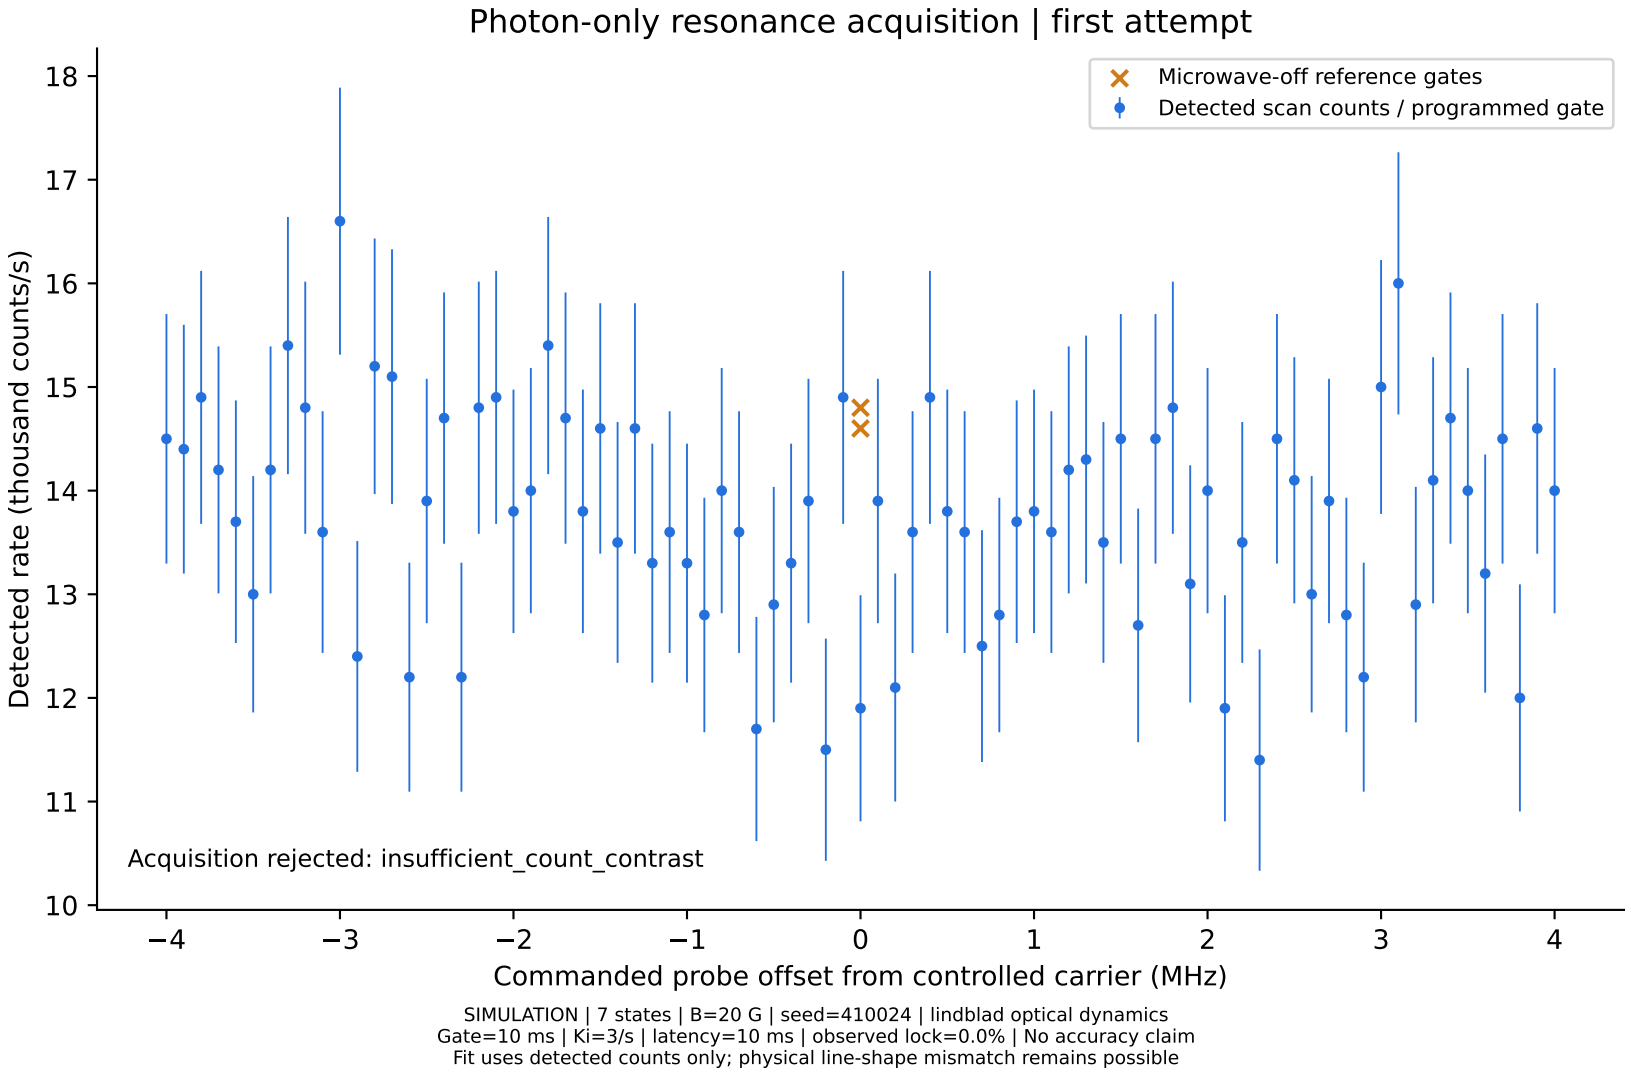
Photon-only resonance acquisition | first attempt
Microwave-off reference gates
Detected scan counts / programmed gate
Detected rate (thousand counts/s)
Commanded probe offset from controlled carrier (MHz)
Acquisition rejected: insufficient_count_contrast
SIMULATION | 7 states | B=20 G | seed=410024 | lindblad optical dynamics
Gate=10 ms | Ki=3/s | latency=10 ms | observed lock=0.0% | No accuracy claim
Fit uses detected counts only; physical line-shape mismatch remains possible