



FPVspeed™

DIY Module Series

FPV Video Receiver

FS1022RX

1080~2200MHz -95dBm SPI & RSSI

1. 通用规格 (General)

FS1022RX	
Weight	5.5g±0.1g
Dimensions	L37 x W26.3 x H4.5mm
DC Characteristics	
Power Supply	5.0V
Current Consumption	420mA ±30mA @5V
Environmental Specification	
Operating Temperature	-10~+65°C
Storing Temperature	-30~+85°C
Operating Humidity	85%RH
RF	
Receiving Frequency Range	1080~2200MHz
Demodulation System	FM/PLL
IF	480MHz
ANT. Input Impedance	50Ω, Typ.
LO Frequency Stabilization	±200kHz
LO Frequency Precision	±200kHz
LO Control	PLL
Input LO Leak	-65dBm
Receiving Sensitivity	-95dBm±3dBm
Video Characteristics	
Video Output Impedance	75Ω, Typ.
Video Output Level	1±0.2Vp-p, Typ.
Video Polarity	Negative
Video Frequency Response	±5dB, Max. 50Hz~6MHz
Differential Gain	±5%, Max
Differential Phase	±5Deg., Max
3Db IF WIDEBAND	16.5MHz
S/N	38dB, Min
RSSI Slope	22mv/dBm



APPLICATIONS

- FPV Drone Racing
- UAV Communication Systems
- Remote Vehicle Monitoring
- Wireless Video Transmission Systems

- The **FS1022RX** is a module that supports CVBS signal output. It features low latency and strong anti-interference capabilities, and is widely used in fields such as FPV (First-Person View) drone flight, outdoor entertainment, racing competitions, and professional aerial photography. It allows developers to conduct functional expansion and customized development based on the existing SPI protocol.



FPVspeed™

DIY Module Series

FPV Video Receiver


FS1022RX

1080~2200MHz -95dBm SPI & RSSI

2.引脚分布 (Pin Assignment)

Pin No.	Function	
1	+5V IN	
2	S1: NC	
3	GND	
4	S2	1) S2=H,S3=L, Freq.1080-1700MHz 2) S2=L,S3=H, Freq.1720-2200MHz
5	S3	
6	Video Out	
7	SPI_CLK / CS3	
8	SPI_LE / CS2	
9	SPI_DATA / CS1	
10	RSSI	
11	GND	
12	GND	
13	GND	
14	ANT	
15	GND	

PAD No.	Function
2	Connected with S1
4	Connected with S2
5	Connected with S3
7	Connected with CS3
8	Connected with CS2
9	Connected with CS1

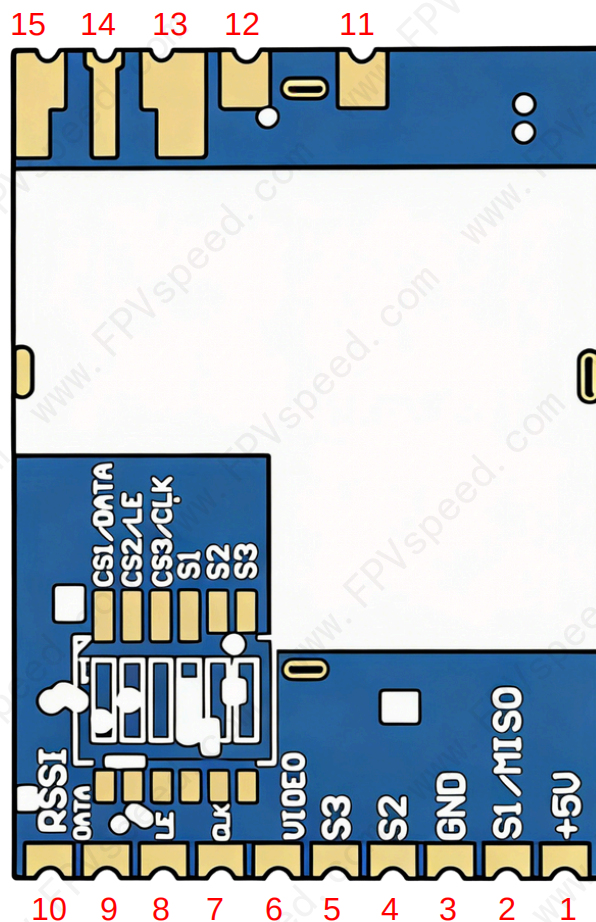

Using the E4421B signal generator as the signal input source for the module, the RSSI output voltage at the 1080MHz frequency point is for reference only.

Input Signal Strength	RSSI Output Voltage	Input Signal Strength	RSSI Output Voltage
-100dBm	0.180V	-65dBm	1.916V
-95dB	0.172V	-60dBm	2.197V
-90dB	0.538V	-55dBm	2.473V
-85dB	0.802V	-50dBm	2.708V
-80dB	1.076V	-45dBm	2.629V
-75dB	1.355V	-40dBm	2.721V
-70dBm	1.633V		



FPVspeed™


DIY Module Series

FPV Video Receiver

FS1022RX

1080~2200MHz -95dBm SPI & RSSI

3.应用电路 (Application Circuit)

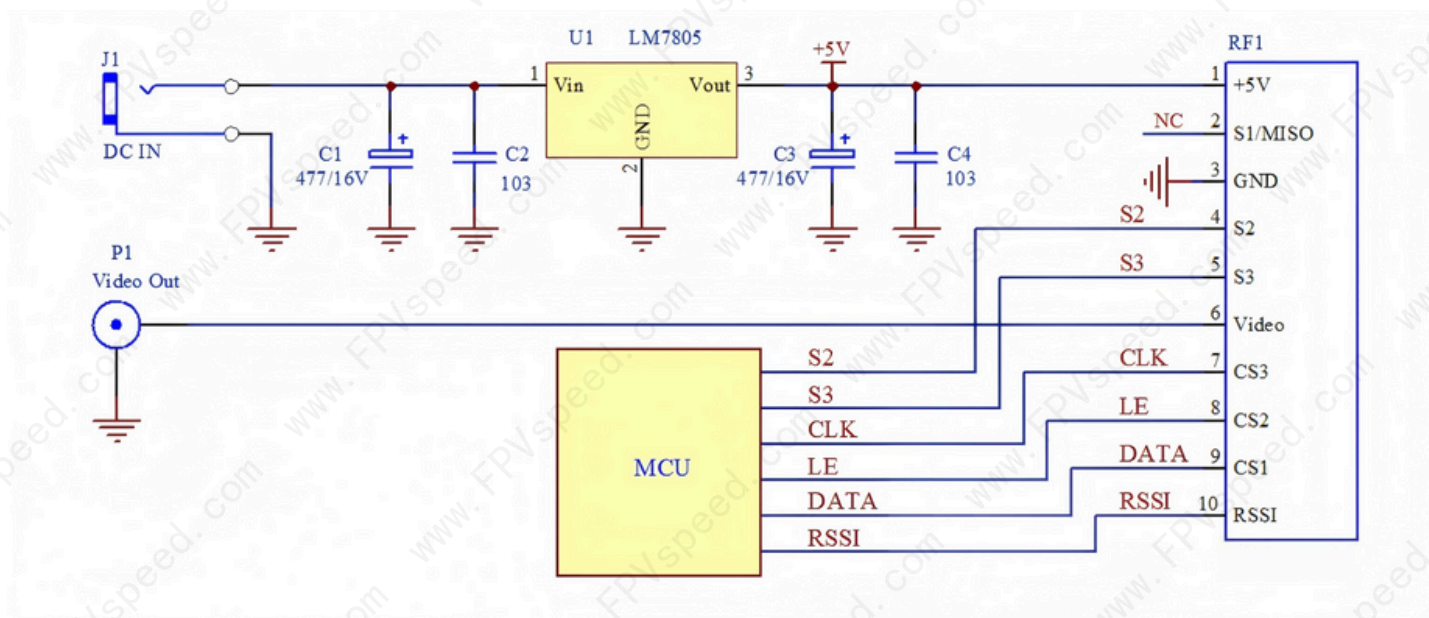

4.结构尺寸 (Dimension)

