PCB FABRICATION NOTES

CONSTRUCTION

PCB制作注意事项

FAB SPECIFICATION FAB规范	■IPC-6012 □IPC-6013 □MIL-SPEC P-55110 IPC CLASS 类 □1 ■2 □3 P-55110军用规范
LEAD-FREE RoHS3 无铅RoHS3	FOLLOW DIRECTIVE 2011/65/EU & 2015/863/EU (ROHS 3) 根据2011/65/EU欧盟指令 & 2015/863/EU (RoHS 3)
MATERIAL (材料)	□ 94 HB PAPER PHENOLIC (94 HB酚醛纸) □ FR1 PAPER PHENOLIC (FR1酚醛纸) ■ FR4 GLASS-EPOXY (FR4玻璃一环氧) □ FLEXI POLYIMIDE (FLEXI聚酰亚胺) □ METAL CORE (金属芯) □ HYBRID (REFER TO STACKUP LEGEND FOR DETAILS) 混合(参考叠层LEGEND的详细信息)
FINAL PCB THICKNESS 最终的PCB厚度	□ 0.1mm ±0.1mm □ 0.2mm ±0.1mm □ 0.5mm ±0.1mm □ 0.8mm ±0.1mm □ 1.0mm ±0.1mm □ 1.2mm ±0.12mm ■ 1.6mm ±0.16mm □ 2.4mm ±0.24mm □ 3.2mm ±0.32mm □ OTHER: XX mm (其他) □ HYBRID (REFER TO STACKUP LEGEND FOR DETAILS) 混合(参考叠层LEGEND的详细信息)
LAYER COUNT (层数)	□ BARE SUBSTRATE 裸露基板 □1 ■2 □4 □6 □8 □10 □12 □OTHER___ 其他
SPECIAL CORES	□ YES ■ NO IF YES, REFER TO STACKUP LEGEND
BOARD EDGE	NO METAL BURRS AND SHARP EDGES
BOW & TWIST	1% MAX ON SMD PCBS
PROFILING	□ NC-ROUTE □ V-SCORE □ PUNCH □ LASER ■ MULTIPLE (REFER TO DRAWING)

CONDUCTIVE MATERIAL (导电材料)

FINAL CU THICKNESS 铜厚	□ 12um □ 17um ■ 35um □ 55um □ 90um □ ___um FINISHED
PLATING FINISH & PARAMETERS 电镀表面处理及参数	□ HASL 0.75um - 35um (热风整平) ■ ENIG Ni 3-6um Au 0.05um (2umil) minimum (镍沉金) □ ENIG Ni 3-6um Au 0.025um (1umil) minimum (镍沉金) □ ASIG Ag 0.7-1um Au 0.03um minimum (银沉金) □ I-Sn 1um (minimum) 1.15um - 1.3um typ (镀锡) □ I-Ag 0.05um (Thin) - 0.12um (Thick) minimum (镀银) □ OSP
SELECTIVE Au PLATING	■ NO □ YES ON EDGE FINGERS □ AS INDICATED

INTERCONNECTS

DRILL PROCESS	■ THT □ BLIND & BURIED VIAS □ LASER VIAS
HOLE WALL PLATING	AS SPECIFIED IN IPC-6012 CLASS
FINAL HOLE SIZE	AS PER TABLE, AFTER TH PLATING (TOL -0.0mm +0.1mm)
MIN HOLE SIZE (mm)	□ 0.10 □ 0.15 □ 0.2 □ 0.25 ■ LARGER
QTY SIGNAL LAYERS	□ 0 □ 1 ■ 2 □ 3 □ 4 □ 5 □ 6 □ 7 □ 8 □ 9 □ 10
QTY COPPER PLANES	■ 0 □ 1 □ 2 □ 3 □ 4 □ 5 □ 6
MIN TRACE WIDTH (mm)	□ 0.10 □ 0.15 ■ 0.2 □ 0.3 □ LARGER
MIN TRACE SPACING (mm)	□ 0.10 □ 0.15 ■ 0.2 □ 0.3 □ LARGER

COSMETICS

SOLDERMASK PLACEMENT ACCURACY	□ 75um ■ 100um □ 150um
SOLDERMASK SIDES	□ TOP □ BOT ■ BOTH SIDES
SOLDER MASK TYPE	SOLDER MASK OVER BARE COPPER (SMOBC)
SOLDER MASK COLOUR 阻焊颜色	■ GRN 绿色 □ BLUE 蓝色 □ YEL 黄色 □ RED 红色 □ WHITE 白色 □ BLACK 黑色 □ ORANGE 橙色
SOLDERMASK WEBBING	GANG RELIEF NOT ALLOWED, UNLESS BELOW CAPABILITY
SILKSCREEN COLOUR 丝印颜色	■ WHITE 白色 □ YEL 黄色 □ BLACK 黑色 □ OTHER _____ 其他
SILKSCREEN PRINT	NO LEGEND TO BE APPLIED OVER SOLDER PADS
SILKSCREEN QTY	□ TOP □ BOT ■ BOTH SIDES □ NONE
SILKSCREEN LINE WIDTH	■ 0.15mm □ 0.2mm
SILKSCREEN OVER PADS	NOT PERMITTED, PLEASE REMOVE IF PRESENT

MANUFACTURING DEVIATIONS

PAD REMOVAL	ALLOWED ON UNUSED PADS ON INNER LAYERS
TEARDROPPING	PREFERRED
Cu THIEVING	ALLOWED ON PANEL STRIPS
VIA SIZE REDUCTION	NOT ALLOWED

ADDITIONAL REQUIREMENTS

ELECTRICAL TEST	■ NONE □ FIXTURE □ FLYING PROBE
MANUFACTURER LOGO	□ YES ■ NO
BATCH No ON S/SCREEN	□ YES ■ NO
CERTIFICATE REQ'D	■ E-TEST □ UL □ IPC-6011/12 □ MIL-SPEC P-55110

MANUFACTURING DATA

GERBER DATA

FILENAME.EXT: **DT_AZP1524A1_PCB1_00A**

TOP COPPER	■ YES	□ NO	. GTL
BOTTOM COPPER	■ YES	□ NO	. GBL
TOP SOLDER MASK	■ YES	□ NO	. GTS
BOTTOM SOLDER MASK	■ YES	□ NO	. GBS
TOP OVERLAY	■ YES	□ NO	. GTO
BOTTOM OVERLAY	■ YES	□ NO	. GBO
TOP SOLDER PASTE	■ YES	□ NO	. GTP
BOTTOM SOLDER PASTE	■ YES	□ NO	. GBP
TOP SELECTIVE GOLD	□ YES	■ NO	. GTG
BOTTOM SELECTIVE GOLD	□ YES	■ NO	. GBG
TOP PEELABLE BLUE	□ YES	■ NO	. GTB
BOTTOM PEELABLE BLUE	□ YES	■ NO	. GBB
PCB OUTLINE	■ YES	□ NO	. GM1
DRILL GUIDE	■ YES	□ NO	. GG1
MANUFACTURING/ DRILL DRAWING	■ YES	□ NO	. GD1
DRILL SET #1 (ROUND)	■ YES	□ NO	DT_AZP1524A1_PCB1_00A -RoundHoles.TXT
DRILL SET #2 (SLOTS)	■ YES	□ NO	DT_AZP1524A1_PCB1_00A -SlotHoles.TXT

MANUFACTURING ZIP FILENAME: DT_AZP1524A1_PCB1_00A .ZIP

SPECIAL INSTRUCTIONS

CRITICAL DIMENSION (CD) □ NO ■ YES (REFER TO DRAWING)

V05.2

V-GROOVE DETAIL

APPLY TO PANELISED PCB IF APPLICABLE AND REQUESTED



MAX DEVIATION 0,10mm

PCB THICKNESS	V-GROOVE WIDTH	GAP
0,80mm	0,16mm +/- 0,10mm	0,3mm +/- 0,10mm
1,55mm	0,50mm +/- 0,10mm	0,4mm +/- 0,10mm
2,40mm	0,80mm +/- 0,10mm	0,5mm +/- 0,10mm

RELIABILITY TESTING

- ■ E-TEST 100% O/S ET Test
- ■ SOLDERABILITY TEST
- ■ SOLDER FLOAT TEST
- ■ BOW & TWIST
- □ PTH THERMAL SHOCK TEST
- □ PTH COPPER THICKNESS
- □ VIBRATION TEST
- □ SALT SPRAY TEST
- □ CLEANLINESS (e.g. IONIC CONC.)
- □ OTHER: _____

ALL DIMENSIONS IN mm

0 5 10 15 20

Scale in Millimeters

OWNER:	Azoteq Pty(Ltd.)
PCB TITLE:	Logic Analyzer
PCB #:	AZP1524A1 **REV:** 1
GERBER FILENAME:	Drill Drawing For (Bottom Layer,Top Layer)
LAYER NAME:	Drill Guide

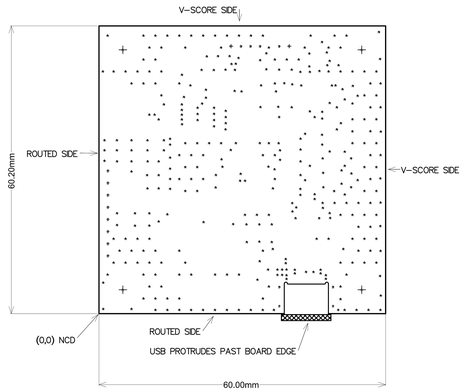

Symbol	Hit Count	Finished Hole Size	Plated	Hole Type	Physical Length	Rout Path Length	Drill Layer Pair
A	364	0.400mm (15.75mil)	PTH	Round	–	–	Top Layer – Bottom Layer
B	2	0.600mm (23.62mil)	PTH	Slot	1.400mm (55.12mil)	0.800mm (31.50mil)	Top Layer – Bottom Layer
C	2	0.600mm (23.62mil)	PTH	Slot	1.800mm (70.87mil)	1.200mm (47.24mil)	Top Layer – Bottom Layer
D	4	0.800mm (31.50mil)	PTH	Round	–	–	Top Layer – Bottom Layer
E	8	1.000mm (39.37mil)	PTH	Round	–	–	Top Layer – Bottom Layer
F	2	1.500mm (59.06mil)	NPTH	Round	–	–	Top Layer – Bottom Layer
G	4	3.300mm (129.92mil)	PTH	Round	–	–	Top Layer – Bottom Layer
	386 Total						

Slot definitions : **Rout Path Length** = Calculated from tool start centre position to tool end centre position.
Physical Length = Rout Path Length + Tool Size = Slot length as defined in the PCB layout

DATESTAMP OF THIS PRINT: 2026/04/16 09:56:43

© 2026 THIS DOCUMENT IS THE PROPERTY OF AZOTEQ, AND MAY NOT BE COPIED OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS SUPPLIED WITHOUT PERMISSION IN WRITING FROM THE OWNER.

REV	DATE	ENGINEER	ECO #			
				Azoteq	TITLE: Logic Analyzer	STANDARD - 2 LAYER - PCB TEMPLATE
				DRAWING NUMBER: AZP1524A1	PCB FILENAME: DT_AZP1524A1_PCB1_00A.PCB	SCH FILENAME: AZP1524A1

SCALE: ORIG A2 | SHEET: 1 OF 13 | REVISION: 1