Bani Hostel IPS Road and J J Rawlings Avenue Reconstruction Brief

Reconstruct the selected Legon East road corridor, Shell frontage near Pent, GOIL and IPS Road junction, PRESEC approach, Bani Hostel surroundings and the UGBS Graduate School vicinity in the existing University of Ghana bicycle game. Use the 20 paired street views, four annotated real aerials and one game map reproduced here. Load and connect the missing scene area from the game's existing map data before refining architecture. The supplied earlier PDF is a presentation sample only.

Required result

One coherent environment must account for every assigned street direction and all overlapping aerial views. Correct the wrong footprint, height and terrain relationships first; then match roofs, facades, surfaces, planting and limited props. Existing bicycle movement, collision behaviour and completed areas remain functional.

Evidence guide

The paired photographs below preserve the original numbering and ordering. In-game views are on the left and real street views on the right. The five additional references are reproduced separately, with their original annotations retained.

Reference	View assignments	Main role
R1	Pair 7	IPS junction and branched directions
R2	Pairs 1 through 6	Shell open parcels and UGBS vicinity
R3	Pairs 8 through 10	GOIL corner and roadside structures
R4	Pairs 11 through 20	PRESEC Bani and local routes
G1	Game map interface	Data coverage and generated-scene check

Limits of the references

These images are visual references rather than surveys. Keep uncertain dimensions, concealed heights and ground levels adjustable. The sample PDF guides presentation only. Building identities follow readable signs and confirmed placements; map labels alone cannot establish architecture or ownership.

Recover the missing area from existing map data

Audit data coverage before placing new geometry

Claude must inspect the existing map source, loader, cached records, feature IDs, bounding boxes and scene-generation rules. The game map already displays some footprints and roads, so missing 3D geometry may result from clipping, coordinate conversion, tag filtering, LOD or template generation rather than absent source records. Identify the actual failure instead of assuming the entire dataset is missing.

Load a connected extent for this section

Select a contiguous extent containing Shell near Pent, the open parcels and UGBS vicinity, GOIL/IPS Road junction, J J Rawlings Avenue, PRESEC approach and Bani side roads/parcels. Include a buffer for roads crossing the boundary and overlapping building footprints. Recover the features from the existing map data; do not independently download or invent a replacement map unless a proven coverage gap requires it and that is separately resolved.

Preserve geographic geometry and feature identity

Inspect the source coordinate reference system and convert every feature through the same existing transform. Preserve feature IDs, multipolygon outer rings and holes, courtyard voids, connected road nodes, service accesses and pedestrian routes. Distinguish a map display layer from actual scene meshes and collision data. Deduplicate overlap records by source identity; do not spawn another Bani, PRESEC gate or filling station when loading adjacent chunks.

Use tags with visual checks

Reuse available names, building levels/heights, roof forms, materials, highway/service/path classifications, fuel-station features, barriers, entrances, utilities and traffic-signal records when present. Tag names and availability depend on the actual source. Do not assume an OSM schema or that every field exists. Prefer verified visual correction over a clearly wrong default tag, recording an explicit local override rather than changing unrelated buildings globally.

Report what is still missing

If a queried feature is absent from the existing data, list its missing coverage or record instead of filling the plot with a generic classroom. Trace a provisional footprint only where the supplied aerial supports it, mark its parameters as estimates and keep it editable. Route names vary across screenshots: resolve road identity from geometry and source records, rather than renaming every segment IPS Road. The author has not inspected the game code or dataset; this is an implementation instruction for Claude.

Environment deletion terrain and utility rules

Remove structures only when absence is established

For every suspect game object, compare the relevant aerial parcel and all overlapping street views. Record keep, reshape, relocate, remove or unresolved. Remove confirmed false buildings, shelters and walls with their obsolete collision volumes and labels. A tree-covered facade, cropped photograph or unavailable rear view is not proof of absence. Preserve uncertain objects provisionally or ask for the exact pair location; do not delete verified neighbouring work.

Match soil ground and topography

Separate worn asphalt, paved forecourts, block sidewalks, compacted dusty ground, reddish exposed soil, short grass, taller scrub and planted strips. Model actual curb rises, shallow verge falls, stone-lined drainage and crossing slabs. Pair 8 provides direct drain/crossing evidence; Pairs 12-13 provide low stone-edge/raised-verge evidence. No reference is a terrain survey, so local elevations stay adjustable. Avoid a site-wide hill, deep trench or retaining wall inferred from shadows alone.

Preserve vegetation occlusion

Place mature trunks, shrub belts, palms and crowns at their real depths and spread. PRESEC grounds are screened behind walls and large trees. Bani blocks show upper roofs and openings through foreground canopy; open scrub plots have irregular low growth rather than ornamental palm avenues. Match which facade portions are hidden. Do not move trees away simply to show reconstructed architecture.

Differentiate shelters signs and walls

Model the Pair 10 concrete overhang separately from small covered service areas, vendor canopies and any verified formal bus stop. Keep the exposed Pair 8 frame in its observed state. Reproduce readable PRESEC lettering, school wall naming, Shell and GOIL brand features, local boards and billboards on real supports. Distinguish a skeletal/empty billboard from a filled advertisement. Unreadable text and hidden seating stay unresolved, not fabricated.

Place infrastructure and preserve bicycle play


Distinguish electricity poles with crossarms/insulators, lattice supports, mast equipment, streetlights and traffic-signal poles. Tie wire spans to correct supports and use reference-supported sag/height without exact unsupported measurements. Thin overhead wires remain visual. Signals match visible heads and facing direction; timing is not established here. Preserve route continuity, curb clearances, wheel support, braking and turning. Small plants, posters and soil texture do not need obstacle colliders.

Shell station and service frontage near Pent

In-game view



Real street view

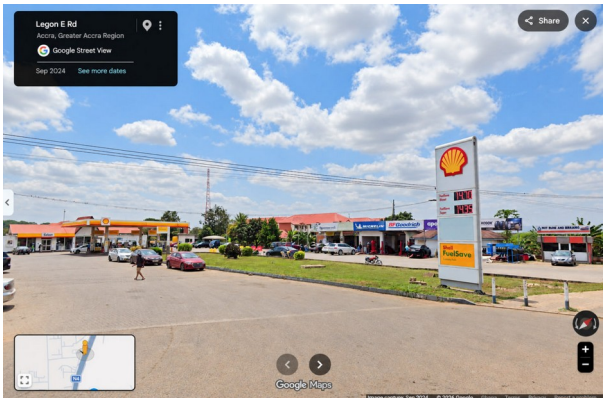

Pair 1

Mistakes visible in the game

The game gives the station and shops an oversized lawn setback, simple canopy and regular campus buildings behind. The real target is a working paved forecourt with a prominent Shell pylon, pump canopy, shop/service bays, roadside signs and overhead wires. Grass cannot substitute for forecourt circulation.

Real target

The Shell pylon stands near the road, separately from the shallow yellow/red canopy on slender pale supports. Low service frontage continues behind the planted strip with differentiated commercial signs and bay openings. Vehicles occupy hard ground, not a campus lawn.

Geometry and placement instructions

Use R2 and its Pair 1 arrow to trace station footprint, canopy, service row and entrance/exit. Keep canopy thin and open below; model pumps as separate units. Rebuild the Shell panel and visible service fascia in their actual positions. Copy only readable wording and treat the displayed prices as reference-date artwork, not current prices. Remove unsupported classroom blocks only after checking aerial coverage.

Terrain surroundings and connections

Replace broad grass gaps with forecourt paving, curb mouths and the limited planted island. Add pole-to-pole wire spans at supported heights. Preserve road and pedestrian-edge levels; no arbitrary raised station platform.

Acceptance checks


The saved camera shows the pylon in front, canopy behind and service bays farther back. Entrance and exit connect to the same road used in Pairs 2-6; no car grid hides the ground geometry.

Roadside palm empty billboard frame and open parcel

In-game view



Real street view

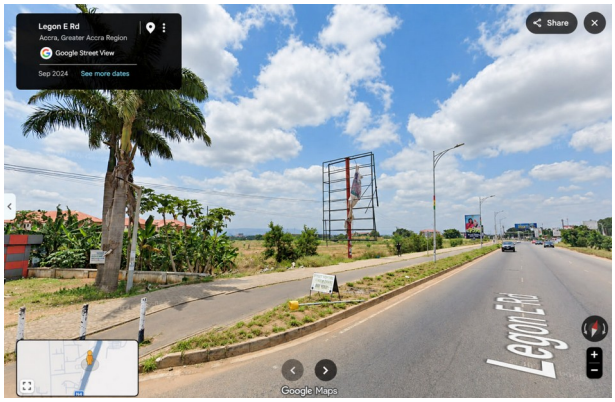

Pair 2

Mistakes visible in the game

The game uses a long ornamental palm avenue over clean grass and omits the large empty billboard structure, rough parcel, narrow side strip and varied roadside furniture.

Real target

A mature near palm has a broad drooping crown. A tall skeletal billboard frame stands farther along the left frontage, with open rectangular bracing rather than a filled panel. Rough grass, shrubs and exposed earth extend toward scattered roofs; a narrow paved roadside route is distinct from the main carriageway.

Geometry and placement instructions

Use R2 and Pair 2 to preserve frontage order and the open parcel. Build the billboard from slender uprights and visible cross-members, retaining missing panel areas. Keep the near palm distinct from smaller trees farther away. Do not create buildings inside clear open-ground footprints or use every game palm as a retained landmark.

Terrain surroundings and connections

Match the sidewalk/side strip, low curb, planted separation and patchy bare earth. Place the small roadside board and painted posts where visible. Keep overhead wires and streetlights separate from palm trunks.

Acceptance checks

The empty frame, near palm and open land align from this camera and the next road views. Unverified obscured rear structures remain provisional; clear open land stays open.

Open scrubland power infrastructure and road margin

In-game view



Real street view



Pair 3

Mistakes visible in the game

The game shows a broad manicured field, regular palms and simplified distant buildings. The real view has unmanaged scrub, bare-soil patches, utility poles, a lattice power support and advertising along a differentiated pedestrian and road edge.

Real target

A narrow paved margin follows the carriageway, separated by a worn planted strip. Beyond it, low shrubs and taller grass occupy open ground. Red-roofed blocks are distant and partly screened; the lattice support and wire spans provide important scale and alignment cues.

Geometry and placement instructions

Use R2 and the Pair 3 direction to retain the open parcel. Match the distant roof group only to supported footprints. Add the evidenced lattice support, simpler utility poles and overhead span directions rather than an invented dense wire curtain. Remove unsupported foreground campus buildings after cross-checking Pairs 4-5 and R2.

Terrain surroundings and connections

Use red/brown soil, yellow-green grasses, shrubs and irregular surface transitions. The image supports local unevenness, not a giant hill. Replace the wide diagonal game path with the actual mapped pedestrian/access network.

Acceptance checks

This view reads as roadside open scrub, with distant roofs and supported utilities, not a park lined with repeated campus blocks. Road width and pavement edges remain consistent with Pair 2.

Distant red roof group across the open parcel

In-game view



Real street view



Pair 4

Mistakes visible in the game

The game puts decorative palms and a large trunk in an open manicured field, with an overly clear building group beyond. The real sightline crosses a narrow roadside strip into rough scrub and exposed soil before reaching distant roofs.

Real target

Several red-roofed blocks have distinct pale and reddish facade portions and varying roof directions. Utility poles and a lattice support cross the view; shrubs interrupt the foreground instead of evenly spaced ornamental trees.

Geometry and placement instructions

Use R2 and the Pair 4 arrow for the target side. Trace the distinct roof footprints and visible facade bands. Keep the long viewing setback; do not enlarge distant blocks until they look like roadside classrooms. Remove unsupported near buildings where the aerial clearly shows open ground. Share the same roof group with Pairs 3 and 5.

Terrain surroundings and connections

Recreate the road curb, worn green/soil separation, pedestrian strip and unmanaged parcel. Use vegetation to conceal the same lower facade portions as the photograph. Keep wire lines tied to real supports rather than floating across arbitrary game trees.

Acceptance checks

The building group remains distant behind rough ground, with the same roof corners across Pairs 3-5. No extra game building fills the clear aerial gaps.

Billboard edge and exposed soil in the open frontage

In-game view



Real street view



Pair 5

Mistakes visible in the game

The game substitutes lawn, generic tree trunks and an unobstructed institutional skyline for the real roadside billboard, rough access ground and scrub parcel.

Real target

A tall billboard is seen nearly edge-on, supported by a narrow metal structure near the paved pedestrian margin. Reddish soil and vehicle-worn ground spread behind it, with scattered shrubs and the same distant roof group visible across the parcel.

Geometry and placement instructions

Use R2 and Pair 5 to locate the billboard independently of buildings. Model panel thickness, supports and side bracing so its edge-on silhouette reads correctly. Reuse the roof group from Pair 4; do not duplicate it. Preserve bare access ground and remove unsupported boxes within the clearly open parcel.

Terrain surroundings and connections

Keep soil irregular and broken by scrub; avoid a uniform red rectangle or continuous grass sheet. Fit curb and sidewalk surfaces to the road. Add only utility spans evidenced across the shared views.

Acceptance checks

The narrow billboard edge, open soil and distant roofs align together. Rotating toward Pair 4 reveals the same assets, and the billboard does not become an invented tower or solid building.

Divided corridor toward the IPS junction

In-game view



Real street view



Pair 6

Mistakes visible in the game

The game corridor lacks the real billboard sequence, mixed pole types, sparse median vegetation and differentiated institutional frontage on the opposite side. Its road and lawn are too regular and bare.

Real target

The real road approaches distant signals through a sequence of roadside panels, small median boards, varied streetlights and overhead utilities. A pale multi-level block with repeated dark bays and red roof enters at the far right; much of its lower facade is outside the frame.

Geometry and placement instructions

Use R2 for the Pair 6 direction and R1 for the upcoming junction. Relate the institutional mass to its map footprint before assigning it to UGBS. Count visible floor bands and preserve the photographed dark/open bay character; this image alone does not prove hidden interiors or a finished glazed facade. Keep any unroofed structural footprint in the aerial distinct until construction state is corroborated.

Terrain surroundings and connections

Build narrow dry-grass/soil median strips and pedestrian margins, not wide parks. Place billboards at distinct depths and tie wires to appropriate utility poles. Vehicles remain optional scale props.

Acceptance checks


The route leads continuously to Pair 7 signals. The opposite block, signs, median and utilities keep their relative order. No invented completed building replaces a clearly unroofed frame without further evidence.

Signalised IPS Road junction approach

In-game view



Real street view

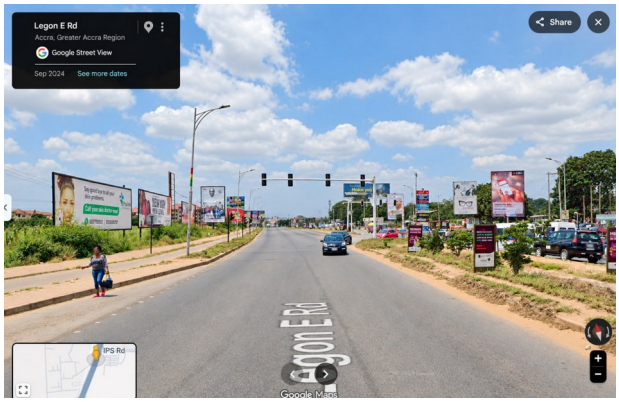

Pair 7

Mistakes visible in the game

The game shows a curved empty boulevard and generic side path instead of the real signal-controlled road approach, dense advertising and defined junction mouth.

Real target

Overhead signal heads hang from a horizontal support across the approach. Numerous tall and small boards occupy the roadside and median; the corner has worn ground, curb returns and low commercial/service activity near GOIL.

Geometry and placement instructions

Use both Pair 7 arrow directions in R1; do not discard either branch. Recover carriageways, median opening, IPS Road mouth and supported turns from map data, then align to R1/R3. Build signal mast, crossbar and visible heads with correct facing directions. Do not infer a complete signal timing plan or unseen lane count from one photograph.

Terrain surroundings and connections

Fit curb corners, pedestrian space, drainage transitions and soil margins before props. Signs must stand on real median/verge surfaces, not in rideable lanes. Maintain continuous bicycle-grade road meshes through the junction.

Acceptance checks


The approach has the evidenced signal silhouette and real road mouth. A supported turn reaches the GOIL/IPS side used by Pairs 8-10; signal poles do not block the route.

GOIL corner drainage utility cabinets and exposed frame

In-game view



Real street view

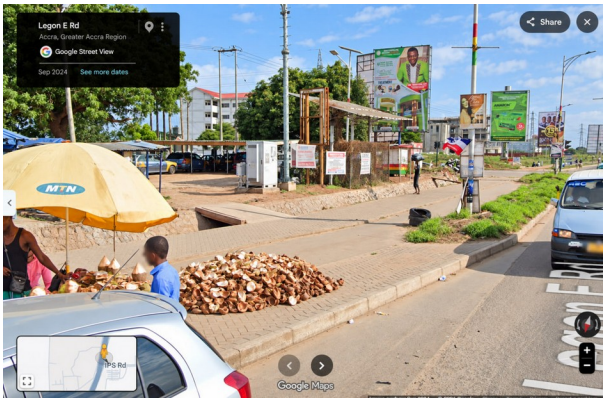

Pair 8

Mistakes visible in the game

The game replaces a close, occupied roadside corner with grass, scattered people and an oversimplified junction. It omits the drain, crossing slab, utility cabinets, shelter roofs, sign cluster and exposed structural frame.

Real target

A block-paved pedestrian route crosses a stone-lined open drain on a short slab. White utility cabinets stand near the back edge. An exposed rust-coloured post-and-beam frame and shallow roof pieces sit among signs and small covered activity areas. A tall mast/pole rises behind; vending umbrellas are temporary props.

Geometry and placement instructions

Use R3 and Pair 8 to locate corner access and fixtures. Preserve the exposed frame as seen; do not turn it into a completed enclosed building or automatically call it a bus shelter. Model cabinets, drain lining, slab and supported low roofs separately. Match the large boards and small notice panels; omit unreadable wording.

Terrain surroundings and connections

Place the drain below pedestrian level and provide the visible crossing. Use compacted soil behind the paving, planted median edges and irregular ground. Keep small drain openings contained so bicycle collision does not fall through an unintended road-wide trench.

Acceptance checks

The corner shows paving, crossing slab, drain, cabinets and the correct open frame. The same objects appear consistently in Pair 9. Deletion decisions distinguish missing objects from objects hidden by trees or umbrellas.

GOIL frontage and roadside trading ground

In-game view



Real street view



Pair 9

Mistakes visible in the game

The game installs a generic blue UG shuttle shelter and lawn where the photo shows occupied paved/soil frontage, vending activity, covered parking/service space and the GOIL context behind.

Real target

Yellow and blue umbrellas, small kiosks and pedestrians occupy the roadside margin. Low shelter/canopy roofs and vehicles sit farther back under trees. A branded filling-station roof is visible through the setting; the corner hardware and frame continue from Pair 8.

Geometry and placement instructions

Use R3 and both Pair 9 sightline branches to place the GOIL parcel and roadside corner. Trace station canopy and service footprint from the aerial before facade work. Check whether the game blue shelter has a real counterpart at its exact position; remove that unsupported shelter if all supplied views and map evidence exclude it. Do not replace the actual structures with one standard bus-stop asset.

Terrain surroundings and connections

Rebuild paving, compacted soil, shaded covered activity and planted boundaries. Vending goods and umbrellas are optional reference-date props; underlying ground and fixed structures must remain correct when they are hidden. Reuse Pair 8 utilities and drain.

Acceptance checks

GOIL and roadside fixed roofs occupy the real parcel, and the false lawn/shelter arrangement is gone where unsupported. Pairs 8-9 show one coherent corner rather than independent copies.

Distinct concrete roadside shelter and forward corridor

In-game view



Real street view



Pair 10

Mistakes visible in the game

The game uses a small standard blue shelter on empty grass. The real frontage includes a much larger pale concrete structure with a deep projecting roof and shaped support/wall geometry, plus billboards, vending ground and hard pedestrian space.

Real target

The shelter-like concrete mass sits close to the road on the right. Its broad roof overhang and rounded or angled wall/support portions are visible beneath a tall billboard. Another horizontal billboard hangs farther ahead. Clothing stalls and vehicles occupy the adjacent rough pedestrian edge.

Geometry and placement instructions

Use R3 and the two Pair 10 directions to set the corridor and concrete structure location. Model the observed roof slab, wall returns, opening and support form individually; do not reuse the game glass/blue shelter. Do not invent enclosed rooms or seating behind occlusion. Separate billboard frames and physical sign panels from the shelter.

Terrain surroundings and connections

Match hard sidewalk/apron, dusty soil pockets and worn curb. Keep the shelter footprint clear of the carriageway and make the route continue to the PRESEC/Bani section. Static signs should reflect visible artwork only; traffic is optional.

Acceptance checks

The right frontage shows the distinctive deep concrete roof and correct wall silhouette. Different bus/shelter structures remain different across the corridor; no generic replacement hides this shape.

Signal approach near PRESEC and Bani

In-game view



Real street view



Pair 11

Mistakes visible in the game

The game lacks the signal crossbar, roadside signs, planted boundary character and accurate junction/median relationships. Its distant white blocks and empty lawn fail to match the enclosed school frontage.

Real target

The real forward view has overhead signal heads, mixed traffic, varied signboards and a tree-covered right frontage behind a pale boundary wall. Bani-side masses and open plots lie across the main road; a narrow median separates carriageways.

Geometry and placement instructions

Use R4 and Pair 11 for direction; share the main road and upcoming entrance with Pairs 12-14 and 20. Build the evidenced overhead signal assembly at this junction, with correctly oriented heads. Recover lane/turn topology from map data instead of adding arbitrary grass medians. Preserve PRESEC walls and gate depth rather than substituting campus classrooms.

Terrain surroundings and connections

Rebuild curb edges, patchy verge, paved margins and supported pole/wire sequence. Separate electricity, lighting and signal supports by observed form. Keep advertising on the appropriate side, with trees screening the school buildings.

Acceptance checks


Forward views connect to the PRESEC turn and show the same signal location as Pair 20. The wall and dense canopy remain recognizable with traffic hidden.

Curved PRESEC entrance approach and stone edge

In-game view



Real street view

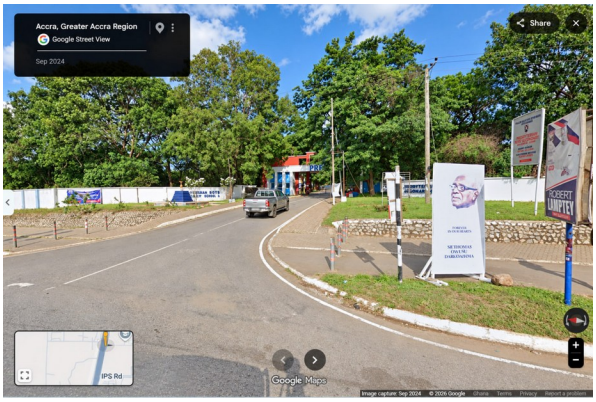

Pair 12

Mistakes visible in the game

The game makes the school approach an empty straight spur toward exposed blocks. The real route curves toward a named entrance through dense trees, pale walls and a shaped stone-faced verge.

Real target

A narrow entrance road bends inward toward the PRESEC gateway. White edge lines follow the curve. Block paving and stone-faced low retaining/edge treatment border the approach. Several signs stand near the road; mature canopy screens the grounds behind.

Geometry and placement instructions

Use R4 and Pair 12 to recover the curve, its connection to the avenue and the actual gate position. Build the gateway with its visible pale span, coloured piers and roof elements using Pair 13. Model only supported low stone edge and planted rise; do not invent a large staircase or steep hill. Preserve the small entrance width relative to the highway.

Terrain surroundings and connections

Match pedestrian paving, near curb/island and raised grass/stone relationship. Add readable institutional signs and painted posts. Trees must obscure the same inner buildings instead of being moved aside to display them.

Acceptance checks

The curve arrives at the same gateway as Pair 13. Stone edge and verge levels follow the real approach, while road collision remains continuous and the school is largely screened by canopy.

PRESEC gateway lettering and boundary walls

In-game view



Real street view



Pair 13

Mistakes visible in the game

The game entry points toward generic blocks on lawn and has no matching named gateway, school lettering, enclosure or vegetation density.

Real target

The pale gateway span reads PRESEC, with coloured vertical supports and roof features partly visible under trees. Boundary walls carry PRESBYTERIAN BOYS SECONDARY SCHOOL lettering, interrupted by planted frontage and a small blue stepped/plinth feature at the left. The road passes centrally through the opening.

Geometry and placement instructions

Use R4 and Pair 13 to place the gateway, wall returns and road centre. Reproduce readable PRESEC and school wording on the actual wall/span, matching colour, line arrangement and scale. Keep the blue foreground feature separate; do not enlarge it into an invented entrance stairway across the road. Retain gate structures only where visible and do not invent interiors.

Terrain surroundings and connections

Continue Pair 12 paving, stone verge edge, painted posts and white road markings. Use tall mature crowns close to the gateway so most internal buildings remain hidden. Keep wall collision outside the road opening.

Acceptance checks


The camera shows PRESEC on the span and school wording on the wall, framed by the real canopy. The entrance connects to Pair 12 and shares the same boundary along Pair 14.

School boundary along the avenue

In-game view



Real street view

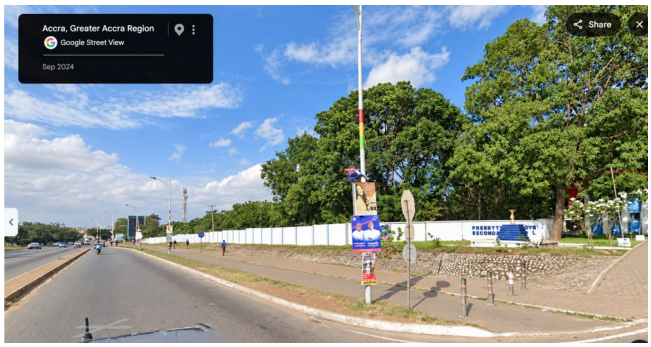

Pair 14

Mistakes visible in the game

The game has open lawns, exposed blocks and an oversized grass separation where the real corridor follows a long school boundary with closely planted trees and a defined pedestrian margin.

Real target

A pale wall continues along the right side beneath mature canopy. Near the entrance, institutional lettering, signs and a stone-faced/paved verge are visible. A tall painted streetlight stands at the approach edge. The main roadway and median continue ahead.

Geometry and placement instructions

Use R4 and the assigned Pair 14 direction, preserving its relation to the other PRESEC views. Extend one continuous boundary from Pair 13, with actual gate breaks and roof/building visibility behind trees. Do not tile a decorative fence arbitrarily or keep unsupported roadside school buildings exposed.

Terrain surroundings and connections


Fit highway curb, planted separation, pedestrian strip and school verge level. Put posters on the relevant poles only where visible; they are not new permanent buildings. Trees should retain uneven canopy and trunk spacing.

Acceptance checks


The school wall and entrance corner belong to one enclosure across Pairs 12-14. No duplicate gate or contradictory road mouth appears when riding along the avenue.

Bani area cream blocks behind median trees

In-game view

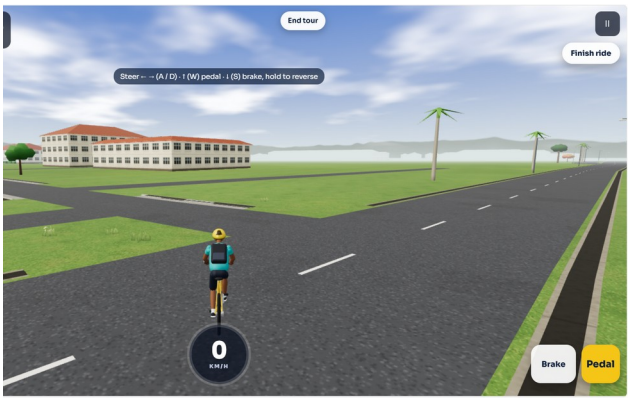

Real street view

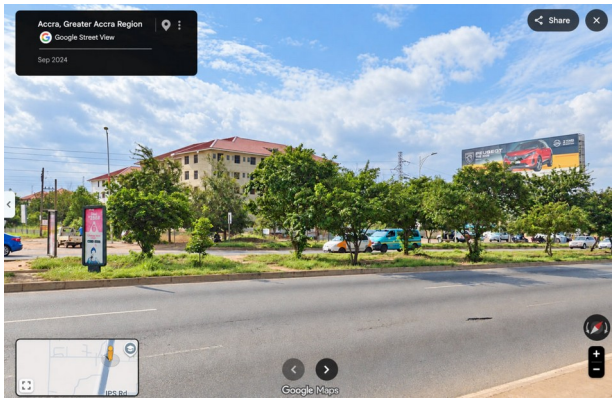

Pair 15

Mistakes visible in the game

The game turns the Bani-side target into a long low institutional bar on open lawn. The real mass is taller and more compact, with differentiated wings and foliage screening its lower levels.

Real target

A cream multi-level block has a dark red hip roof, pale facade bands, individual dark openings and adjoining volumes at different depths. Multiple rows of openings are visible, but trees hide much of the base. A leafy median, side street/forecourt and large elevated billboard sit between the viewer and buildings.

Geometry and placement instructions

Use R4 and Pair 15 to trace the Bani-side roof group. Fit height from visible floor bands together with map tags; do not force the generic two/three-storey bar or infer hidden floors from roof length. Preserve separate roof wings and individual window/AC character where visible. Share verified roof corners with Pairs 16 and 18.

Terrain surroundings and connections


Place mature median and frontage trees to conceal the same lower facade, with patchy grass, bare soil and worn paths below. Add the elevated billboard, smaller boards and supported electrical spans at their real depths.

Acceptance checks


The taller compact block is recognizable above and between trees. It remains the same model from Pair 18, while the median and frontage vegetation prevent an unrealistically clear facade.

Bani junction oblique and shaded roadside ground

In-game view

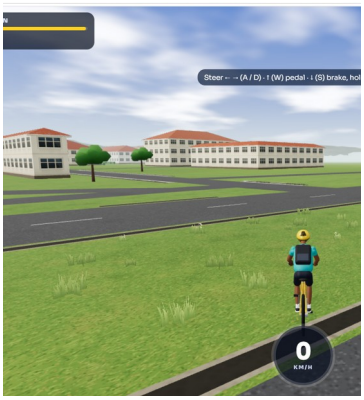

Real street view

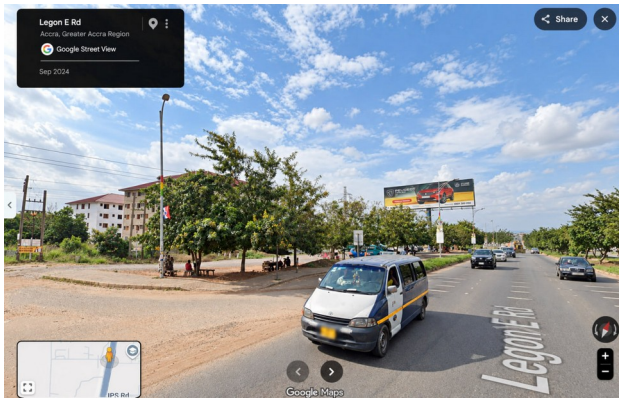

Pair 16

Mistakes visible in the game

The game makes the junction an angular paved crossing bordered by lawn and stretched blocks. The real corner has a broad dusty access mouth, shaded pedestrian/forecourt ground and more compact taller roof masses.

Real target

Oblique views show cream and pale blocks behind trees, a large billboard above the corridor and a simple streetlight near shaded seating/activity. The side-road mouth blends worn asphalt and dusty edges; greenery screens the lower building fronts.

Geometry and placement instructions

Use R4 and Pair 16 to align the side access, Bani-side roof corners and main road. Reuse Pair 15 masses and independently trace neighbouring blocks. Correct turn radii and setbacks from map geometry rather than guessing from traffic. Add supported billboard and sign positions, keeping poles out of the mouth.

Terrain surroundings and connections

Replace grass inside the actual junction/apron with worn asphalt and compacted soil. Retain mature trees and shaded sitting space where visible, with optional people/vehicles. Keep modest curb and ground transitions rather than an invented terrace.

Acceptance checks


The same roof group, side-road mouth and billboard agree across Pairs 15-18. A bike can turn through the junction without being forced over grass or a floating curb.

Side road opposite PRESEC into the Bani vicinity

In-game view



Real street view

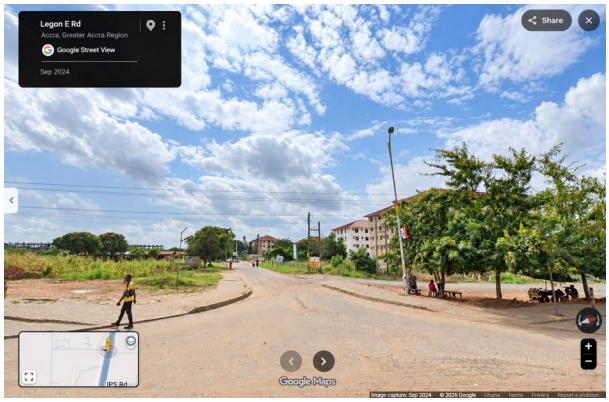

Pair 17

Mistakes visible in the game

The game turns the approach into a straight formal campus street lined by repeated blocks and clean sidewalks. The real access is less regular, with an open vegetated plot on the left, compact taller buildings to the right and worn unmarked ground.

Real target

The side road enters between scrub/soil land and planted building frontage. A low near curb and paved patches define the mouth; overhead wires and simple lights follow the route. Trees shade a near gathering area while taller cream buildings sit behind the right vegetation.

Geometry and placement instructions

Use the Pair 17 arrow in R4 to recover the side-road centreline and connected Bani access from existing map data. Keep the clear open parcel on the left. Remove unsupported game buildings only where aerial and street coverage show their absence. Preserve real access gaps; do not add full classroom rows to populate the route.

Terrain surroundings and connections

Build worn asphalt or compacted margins, exposed reddish soil, scrub and irregular path edges. Reconcile grades with the avenue and adjoining entrance; no exact surveyed slope is available. Add the observed utility spans and tree occlusion.

Acceptance checks


The road reads as a mixed open-plot and planted residential/hostel approach, not a regular campus avenue. Its entrance shares the same corner as Pairs 16 and 18 and reaches the mapped local network.

Compact taller Bani block and side road mouth

In-game view



Real street view

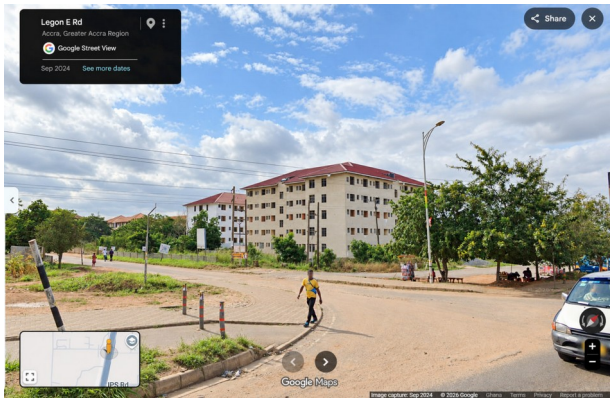

Pair 18

Mistakes visible in the game

The game gives the target a long low facade on a broad lawn. The real block rises much higher above the nearby road and shrubs and is subdivided into individual openings, facade recesses and roof wings.

Real target

The cream building has a broad red hip roof and several visible floor bands, dark window bays and scattered AC units. Lower portions are screened by trees and shrubs. The curved side-road mouth, dusty verge, short painted posts and overhead wires occupy the foreground.

Geometry and placement instructions

Use R4 and Pair 18, sharing the confirmed block with Pairs 15-16. Match visible storey bands after calibrating the camera; keep obscured ground-floor details provisional. Preserve facade depth changes and roof segmentation rather than stretching a repeating classroom slab. Place AC units only where seen.

Terrain surroundings and connections


Rebuild the curved mouth, short posts, soil/grass pockets and near paving edges. Plant the real shrub/tree mass in front of the building; do not shrink vegetation to expose every window. Retain main-road and side-road continuity.

Acceptance checks

The building height, compactness and foliage screening match the photo, and the same roof appears in Pair 15. Ground joins remain smooth and no duplicate facade is placed at the corner.

Bani local street low wall signs and screened roof

In-game view

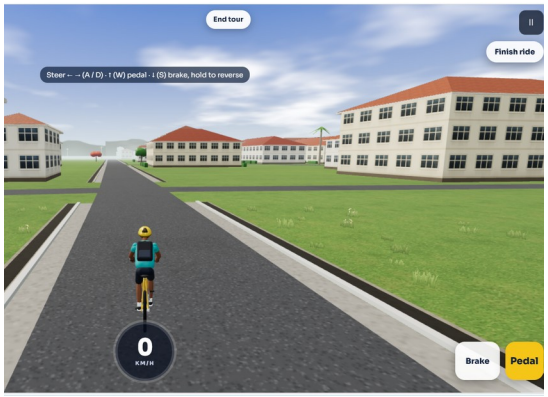

Real street view



Pair 19

Mistakes visible in the game

The game shows plain classroom blocks beside a clean road with few trees. The real narrow street has a peach/cream multi-level hip-roof block behind dense greenery, a low block wall and a sequence of small signboards.

Real target

A weathered reddish tiled hip roof caps a differentiated peach and pale facade. Several visible window bands rise behind mature trees, palms and narrow conifer-like crowns. A low grey masonry boundary and leaning/straight signposts follow the right verge; a utility pole with crossarm and wires frames the near edge.

Geometry and placement instructions

Use R4 and Pair 19 for the inward view. Trace this roof independently from the larger cream block in Pair 18; do not assume they are the same building. Match the visible floor bands, facade colour divisions and actual roof pitch. Place small boards on real posts along the boundary; reproduce only readable names and leave unclear details unasserted.

Terrain surroundings and connections

Build the narrow worn road, paved pedestrian patches, grass/soil verge and low wall base. Retain dense screening so only supported facade portions are visible. Electricity poles differ from simple streetlights and need separate shapes.

Acceptance checks

The local street and wall lead into the mapped Bani vicinity, with the roof visible through trees. Signposts, wires and boundary agree with the same access used by Pair 17.

Reverse signal view and roadside shelter sequence

In-game view



Real street view



Pair 20

Mistakes visible in the game

The game misses the overhead signals and occupied roadside frontage and uses generic buildings and grass for the opposite corner. The real view combines traffic control, low painted/advertised structures, billboards and taller background blocks.

Real target

A horizontal signal arm with several heads crosses the upper right view. Low blue-toned or poster-covered roadside structures sit on the left beyond traffic, with taller pale roofed blocks behind. The median and junction opening remain distinct from the shoulder and pedestrian activity.

Geometry and placement instructions

Use both Pair 20 directions in R4, sharing the signalised junction with Pair 11. Reconstruct each visible low roadside shelter/shop structure individually, checking its exact location against the aerial and other views. Do not assume all are bus shelters or clone the Pair 10 concrete structure. Preserve the signal head count and orientation visible here without inventing unseen phasing.

Terrain surroundings and connections

Match paved or dusty roadside ground, narrow verge and advertising positions. Traffic can be hidden for geometry checks; do not let vans define the footprint. Maintain the road/median opening needed for the supported turn.

Acceptance checks

The reverse and forward cameras see one junction with consistent signals and roadside objects. No extra unsupported campus blocks or standard shelter duplicates occupy clear open or commercial-frontage ground.

Additional reference R1 Real IPS junction aerial and Pair 7 directions



R1 Real IPS junction aerial and Pair 7 directions

Placement evidence

The crop establishes the main divided corridor, IPS Road junction mouth, curved corner margins, roadside activity strip, part of GOIL and the paved parcel below the junction. Pair 7 has two blue direction branches from the labelled viewing zone. Preserve both rather than selecting only the branch that best matches the current game.


Implementation

Recover road connectivity, median opening, intersection shape, station-side access and pedestrian margins from existing map data, then align to this crop. Use Pair 7 for visible overhead signal form and Pairs 8-10/R3 for adjoining corner structures. Roadside roofs and small stalls need separate identities; the aerial alone cannot specify hidden storey count or signal timing.

Acceptance

One junction connects the through-road and IPS approach without disconnected meshes or invented lanes. The mapped paved parcel does not become a lawn or car grid. Arrow branches and labels remain reference annotations, and all survey-like dimensions are adjustable.

Additional reference R2 Real Shell corridor aerial and Pairs 1 to 6

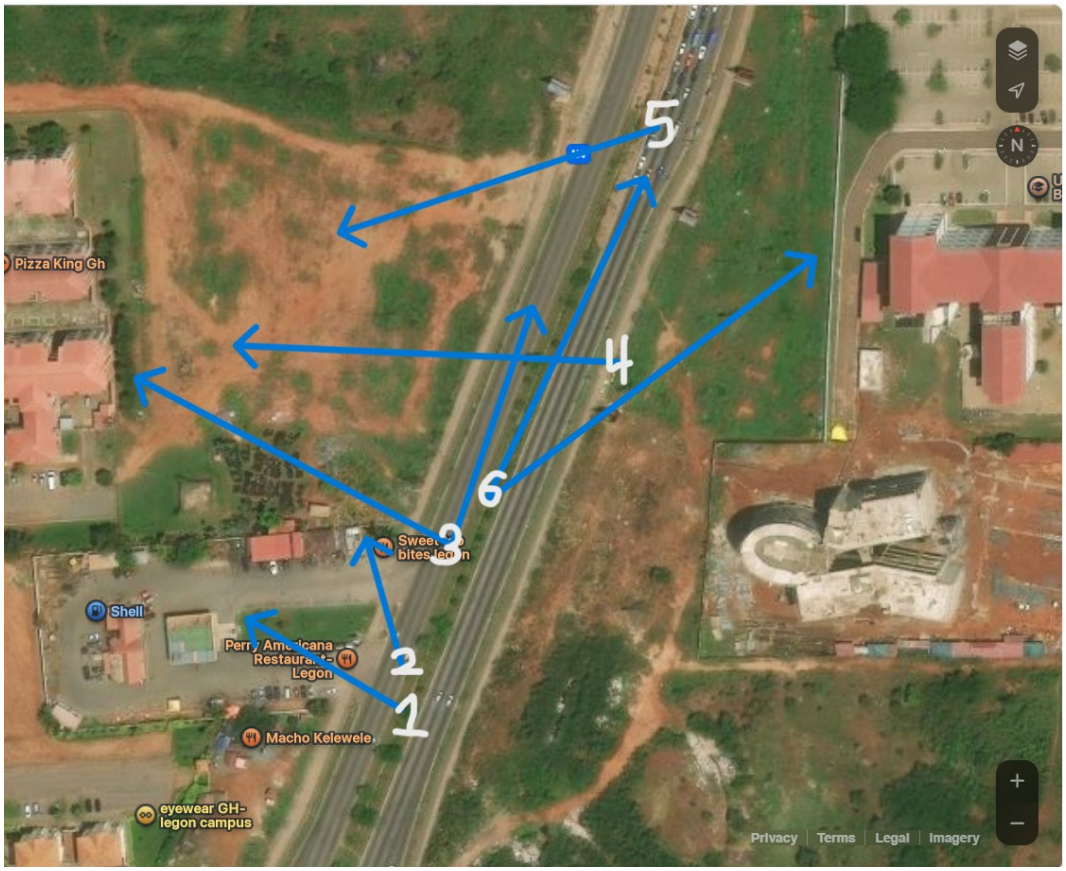

R2 Real Shell corridor aerial and Pairs 1 to 6

Placement evidence

Shell occupies a paved parcel near the lower left of the displayed map. The divided road passes through a broad open scrub/soil zone. Separate roof groups lie farther left and to the right. A large pale unroofed structural footprint is visible on the right; this is not evidence of a finished red-roof classroom. The arrows locate Pairs 1-6; several directions share a labelled origin.

Implementation

Trace station canopy/service roofs, forecourt mouths, clear open parcels, distant blocks and mapped paths independently. Use street views for heights and material/state. For the unroofed structure, preserve the visible footprint and exposed condition provisionally; confirm its identity and vertical extent before modelling it as the UGBS Graduate School or completing unseen floors. Do not assign every nearby roof to UGBS or Pent from a pin.

Acceptance

Overhead checks retain the open ground, station hardstanding and distinct roof groups. The source bare structural area stays separate from completed buildings until corroborated. Shared arrows remain the user assignments; line lengths do not become distances or parcel boundaries.

Additional reference R3 Real GOIL and IPS corner aerial and Pairs 8 to 10



R3 Real GOIL and IPS corner aerial and Pairs 8 to 10

Placement evidence

GOIL has an angled hardstanding parcel with a separate pump canopy, service roof sequence and accesses beside the junction. The corner contains bare soil, trees and small roadside structures. The large marked parking surface below the road is a separate parcel. Pairs 8, 9 and 10 are assigned specific directions, including branched sightlines.

Implementation

Trace GOIL roofs and circulation from the aerial; use Pairs 8-9 for drain, cabinets, frame, covered areas and foreground trading. Use Pair 10 for the different concrete roadside structure farther along. Do not merge all corner shelters into the pump canopy. Keep the paved lower parcel separate and preserve sidewalk/drain crossings along the road.

Acceptance

GOIL, corner activity and opposite parking retain their correct relationships across the street views and R1. Map pins and route names are aids rather than authority for hidden architecture; the compound remains consistent when cars and vendors are hidden.

Additional reference R4 Real Bani and PRESEC corridor aerial and Pairs 11 to 20



R4 Real Bani and PRESEC corridor aerial and Pairs 11 to 20

Placement evidence

J J Rawlings Avenue runs beside Bani roof groups and side-road access on one side and a heavily wooded PRESEC-side frontage on the other. The Bani area contains several individual roofs, open soil/vegetated parcels and local routes. The coloured arrows assign Pairs 11-20; some share zones or branch. Preserve colours, positions and directions.


Implementation

Recover the side-road mouth opposite PRESEC and its local Bani connections from map data. Use Pairs 12-14 for the school gate and continuous wall; use Pairs 15-19 for distinct hostel-side blocks, vegetation and narrow street. Pairs 11 and 20 cross-check the signalised corridor. Do not interpret tree cover as absence of school buildings or duplicate the cream and peach roof groups to satisfy different cameras.

Acceptance

One scene accounts for the entrance, side access, roof groups, clear open land, wooded school parcel and all assigned directions. Confirm which named Bani facility belongs to which footprint before attaching names. Hidden rear geometry remains simple and adjustable.

Additional reference G1 Game map of the requested section

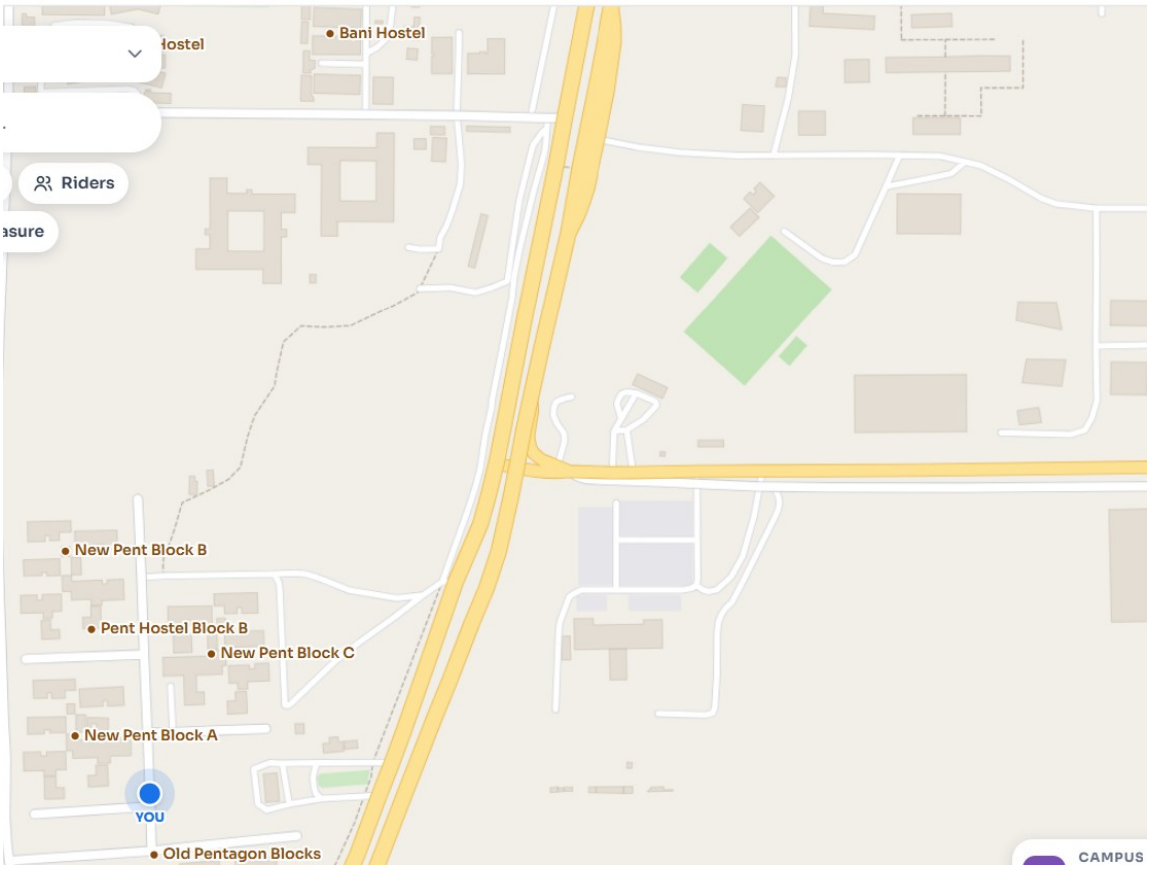

G1 Game map of the requested section

What the image shows

This is a game map interface, not a 3D aerial render. It already contains some roads, courtyard-like footprints, Pent/Bani labels and a player marker. It cannot establish building height, roof material, paint or construction state. Lack of a visible label alone does not prove a feature is absent from source data.

Implementation

Compare raw map records, displayed map features and generated 3D meshes for the same source IDs. Check loading bounds, coordinate transform, generator filters, chunk seams and asset defaults. Expand/load the existing data extent to cover Bani, the side roads opposite PRESEC, IPS junction, Shell/GOIL and UGBS vicinity. Keep courtyard holes and service accesses; update pathfinding, collisions and destination positions with corrected geometry.

Acceptance

Produce a clean plan of generated scene geometry aligned to R1-R4, and show that the loaded feature IDs cover the requested section. The ordinary UI map/player marker still works. YOU, controls, labels and coloured map styling never become buildings, walls or physical roads.

Consolidated Claude prompt data coverage and scope

Implement this reconstruction pass in my existing University of Ghana bicycle exploration game. Correct the Shell station near Pent, GOIL/IPS Road junction, Legon East or J J Rawlings Avenue corridor opposite PRESEC, Bani Hostel blocks and local roads, UGBS Graduate School vicinity and the adjoining areas supported by this brief. Use all 20 paired comparisons, R1-R4 real annotated aerials and G1 game map. Follow the individual correction and acceptance paragraphs. The earlier PDF is a style sample only; do not import its old project or pair numbering.

First inspect the actual engine, scene graph, map-data source and loader, cached records, geographic-to-world transform, scene-generation rules, terrain, roads, labels, navigation and bicycle collisions. My game has map data. Find why this section was omitted or poorly generated: test coverage bounds, chunk selection, incomplete queries, coordinate errors, feature filters, missing tags, LOD and generic asset defaults. G1 already displays some roads/footprints; it is not proof that all raw data is absent. Do not merely decorate the faulty generic layout.

Load a contiguous buffered extent from the existing map data containing the entire selected corridor and its Bani side-road/parcel network, PRESEC access, IPS intersection and fuel-station parcels. Preserve original feature IDs, connected road nodes, multipolygon holes and courtyard voids. Use the actual source schema; do not assume a map provider or invent API/tag names. Reuse available names, levels/heights, roof and material attributes, highway/service/path roles, entrances, barriers, utilities and signals when present, then correct them against the supplied images.

Use one verified coordinate transform and deduplicate features at overlapping chunk boundaries. Link new road surfaces, navigation and collision meshes into the existing working game. Preserve completed areas outside this selection. If source data genuinely lacks a feature, report its ID/coverage gap where possible, keep a traceable editable visual estimate only if the real aerial supports it, and do not fill the space with a fabricated classroom. Resolve road names by geometry and source records because screenshot aliases vary.

Align R2 to Pairs 1-6, R1 to Pair 7, R3 to Pairs 8-10 and R4 to Pairs 11-20. Preserve every original arrow, including multiple branches and shared viewing zones. Use tails as approximate camera zones and heads as directions, refining with roofs, curb corners and signs. Do not treat crossing arrows as junctions, or arrow length as metres. If an exact target remains unresolved, ask directly Where was Pair N taken and defer only that target while continuing independent work.

Consolidated Claude prompt architecture and removal

Prioritise map-aligned roads, footprints, building massing and terrain. Establish the divided road and median breaks, IPS junction, Shell/GOIL forecourts, PRESEC entry curve, Bani side-road mouth and local network before facade decoration. Save baseline scene IDs and before images. Use one scene for all cameras; never build independent camera-specific copies or move a building differently for separate views.

For Pairs 1-6, restore Shell pylon, open shallow pump canopy, low service frontage, paved forecourt and actual entry/exit. Keep the open scrub/soil parcels and distant distinct roof groups. Build empty billboard frames as frames, edge-on panels with proper thickness and utility poles/lattice supports as separate objects. Do not retain ornamental palm avenues merely because they already exist. The aerial unroofed structural footprint must not become a complete red-roof classroom without corroboration; verify identity, height and construction state before assigning it to UGBS.

For Pairs 7-10, restore IPS junction topology and the evidenced signal assembly. Trace GOIL canopy, service roofs and accesses individually. Build the stone-lined drain, short pedestrian crossing slab, white cabinets, exposed rust-coloured frame and nearby covered areas in the observed arrangement. Keep exposed/incomplete pieces exposed instead of completing hidden walls. Differentiate the Pair 10 concrete shelter-like overhang, shaped support/wall and deep roof slab from small metal-roof canopies, kiosks and the game standard blue bus shelter. Do not call an ambiguous roof a bus shelter without evidence.

For Pairs 11-14 and 20, reconstruct one coherent signalised corridor and PRESEC entrance. Match its curved approach, gateway span, coloured piers, readable PRESEC and school wall lettering, continuous pale boundary, stone-faced low edge, pavement, painted posts and dense trees. Keep the school buildings screened by canopy. Match signal head number and orientation visible from each side; the images do not establish unseen heads or operational phase timings.

For Pairs 15-19, trace the individual Bani-side cream and peach/pale roof groups and the local road network. Fit building height to visible floor bands and verified source tags after matching the camera. Retain roof segmentation, facade colour divisions, individual openings and supported AC units. Do not stretch a generic low classroom bar into the hostel complex or assume every visible block is the same building. Match low masonry boundary, local boards, narrow street, open parcels and tree-covered lower facades.

For each suspect game structure record keep, reshape, relocate, remove or unresolved, with supporting pair/aerial evidence. Remove a confirmed false object and its stale collider, label and navigation obstruction. A cropped or tree-covered photograph is not proof of absence; cross-check all available angles and aerials first. Preserve unsupported concealed rear geometry provisionally instead of deleting verified buildings. Do not introduce buildings inside clearly open scrub or soil parcels.

Consolidated Claude prompt ground vegetation and infrastructure

Replace the single lawn plane with local asphalt, station hardstanding, block sidewalks, stone-lined drainage, compacted dusty ground, exposed reddish soil, footpaths, patchy grass and taller scrub. Model curb returns and level transitions from visible evidence, especially Pair 8 drain/crossing and Pairs 12-13 stone-faced verge. Keep slope, drain depth, threshold heights and retaining-edge dimensions adjustable; do not claim surveyed elevations or invent a site-wide hill, trench, stairway or terrace from perspective.

Use mature irregular trees, drooping palm crowns, dense shrub belts and scrub at their real positions and depths. Match which building portions are obscured: PRESEC grounds are heavily screened, Bani roofs and upper levels emerge above foliage, and lower frontages remain partly hidden. Do not move trees aside to show all reconstructed architecture. Open scrub parcels must look unmanaged, not uniformly planted parks. Add local soil beneath canopy, worn paths, low borders and shaded ground where visible.

Include every supported fixed signboard, billboard, institutional name and wall inscription. Copy readable major wording, colour family, support count, panel orientation and local scale. Do not fabricate small print, phone numbers or unclear building names. Shell reference prices are dated artwork rather than live prices. Preserve empty/skeletal billboard conditions. Distinguish physical signs from map pins, arrow labels, screenshot road-name overlays and game floating destination text.

Differentiate bus/station/shelter structures individually by roof profile, wall/support shape, seating if visible, frontage depth and ground treatment. The Pair 10 concrete structure is not the standard blue shelter. Verify the game shelter in Pair 9 against all evidence and remove it if unsupported. Vendor umbrellas, clothes, goods, pedestrians and vehicles are optional reference-date props; fixed ground, shelters, walls and buildings must remain accurate without them.

Place electricity poles with visible crossarms/insulators, simpler streetlights, signal masts and lattice supports as separate types. Connect wire spans to the correct supports with sensible editable sag and overhead clearance; do not generate a uniform wire curtain or free-floating cables. Model observed cabinets, small fixtures and painted post sections economically. Traffic lights must face their supported approaches and be placed consistently across forward/reverse cameras; do not invent a complete traffic simulation from a single displayed light state.

Preserve bicycle controls, wheel support, steering, braking, reverse and playable routes. Update colliders with geometry; keep curb transitions and driveway connections rideable. Boundary walls and substantial poles can use simple collision, while overhead wires, leaves, posters and ground texture remain visual. Keep closed boundaries closed where the game does not permit entry. Ensure corrected map loading does not cause chunk cracks, floating objects, duplicated meshes or mislocated route/destination markers.

Consolidated Claude prompt validation and deliverables

Save 20 comparison cameras with the user pair numbers. Calibrate eye height, heading, FOV and framing from the marked real-map zones before judging facade scale; keep camera parameters editable. Use the shared positions and branched directions exactly as assigned. Hide rider, HUD, browser-style overlays and floating labels in acceptance renders, while retaining normal interface behaviour during play. Use optional traffic toggles to expose fixed geometry.

Generate before-and-after images for every pair and overhead scene renders aligned to R1-R4, plus a clean map/loaded-feature coverage view corresponding to G1. No 3D game aerial is supplied in this set: produce these checks from the existing scene rather than pretending G1 is an aerial photograph. Ensure the same model and collision network account for every view. Do not claim successful reconstruction without the matched comparison images.

Validate R2: Shell canopy/service row and paved forecourt, open scrub parcels, distant roof groups, correct billboard silhouettes and electrical spans; no invented foreground buildings. Validate R1/R3: continuous IPS junction, correct signal locations, GOIL parcel, drain crossing, cabinets, exposed frame and differentiated concrete shelter. Validate R4: one PRESEC curved approach/gateway/wall under dense trees, correct Bani-side roof groups and local roads, appropriate soil/vegetation and consistent reverse signal view.

Check all deletion decisions against the aerial and overlapping street evidence. Verify that construction-state uncertainty remains explicit, that UGBS and individual Bani building names are not guessed from nearby pins, and that hidden school buildings are not removed merely because trees conceal them. Confirm readable names on physical walls and signs, while UI annotations remain absent from scene geometry. Keep source photographs and arrow assignments intact.

Ride both directions along the main corridor, turn through the IPS junction and the side road opposite PRESEC, reach the recovered Bani routes and test supported station/entrance access. Check navigation, marker positions, road-grade wheel contact, curb clearances, turning radii and boundary collision. Inspect chunk seams, duplicate feature IDs, z-fighting, roof intersections, floating utility supports and obsolete colliders. Confirm completed areas elsewhere still function.

Return the code/scene changes, loaded map-data extent and source-feature IDs, old-to-new object mapping, evidence-backed deletion list, 20 comparison images, four aligned overhead checks and G1 coverage check. List unresolved footprint identities, concealed heights, construction state, sign text, local elevations and source-data gaps. The result should closely mimic the complete visible environment, with placement and terrain corrected before decorative polish. Be explicit about deferred targets and do not claim exact measurements.