Okponglo to UG Stadium correction instructions

Correct the 21 referenced views of the Okponglo to University of Ghana Stadium route in the existing bicycle game. Each pair first identifies the visible mistakes, then gives five sequential instructions for Claude to correct geometry, placement, ground conditions, materials, signs and planting. Follow the annotated aerial directions and reconcile shared objects across views.

Order of implementation

1. Register map data roads and plot footprints against the owner annotated aerials.
2. Correct building massing roofs boundary walls and ground height relationships.
3. Replace oversized median trees and restore stadium-side slopes and vegetation.
4. Add physical raised lettering boards façade materials pavement utilities and drainage.
5. Match reference cameras test bicycle collisions and return all 21 comparison views.

Document navigation

Pages 2–22 contain Pairs 1–21 with the game image left and real view right. Pages 23–27 contain the five annotated aerials A01–A05. Pages 28–31 contain the four game-map views M01–M04. Pages 32–35 contain the consolidated ready-to-paste Claude prompt. Paste all four prompt parts together.


Reference handling

Pair 21 uses the replacement real image supplied after the duplicate upload. Pair 12’s game image is mirrored; its real photograph and aerial arrow control placement. Keep all circles and arrows in the reference images, but do not create them as campus objects. Use the separate 21-pair document for larger image inspection. The earlier withdrawn table PDF does not control this brief.

Measurement and object identity

Camera field of view and viewpoint must be matched before judging proportions. Dimensions and uncertain locations remain adjustable. Map points do not establish exact entrances. Trees and roofs may conceal real buildings; delete objects only when registered references establish a conflicting open area. No unseen interiors or hidden utility networks are prescribed.

Pair 1 Median trees near the commercial frontage

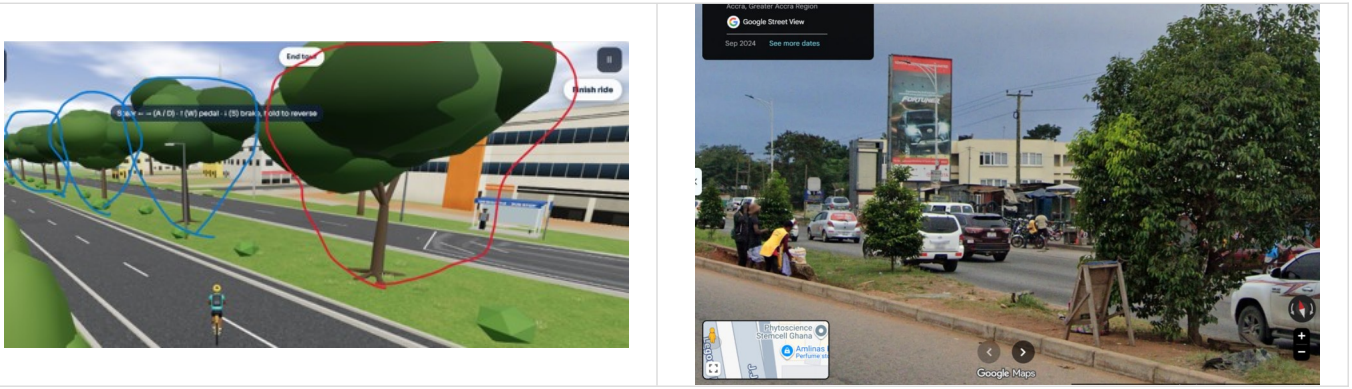

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The circled game trees have large geometric crowns perched on tall exposed trunks. Their size and repetition obscure the opposite frontage. The real median contains mostly compact, low-branching trees and shrubs, a few somewhat larger crowns, patchy grass and exposed soil. Billboard supports and pedestrian wear are missing or simplified.

Step by step instructions for Claude

1. Register the Pair 1 camera using A02 and the visible opposite frontage. Identify the circled median planting group rather than resizing every tree on campus. Compare tree height to the median kerb, cars and sign supports at a matched camera height; keep these as relative references, not surveyed dimensions.


2. Replace most tall exposed trunks with short trunks and low branching. Build compact irregular foliage masses that reach toward the base. Reduce crown width and overall height independently; shrinking the entire existing tree uniformly will leave its tall-stem character. Retain only the few larger crowns supported by the real sequence.

3. Reposition the plants along the actual median, keeping gaps between individual crowns and around advertising posts. Preserve the median width and kerb alignment after checking map data. Remove repeated faceted rocks only where the real view shows grass, soil or a sign base instead.

4. Rebuild mixed soil, patchy grass and worn paths around the plants. Add the supported billboard posts, trunk guards and nearby street-light or utility supports where visible. Do not make temporary cars and pedestrians mandatory static objects.

5. Check from Pair 1 and Pair 2 together: most trees should have short visible stems, the frontage should be less screened, and crowns should vary in size. Preserve larger off-median trees and collision clearance along the road.

Pair 2 Median tree variation and spacing

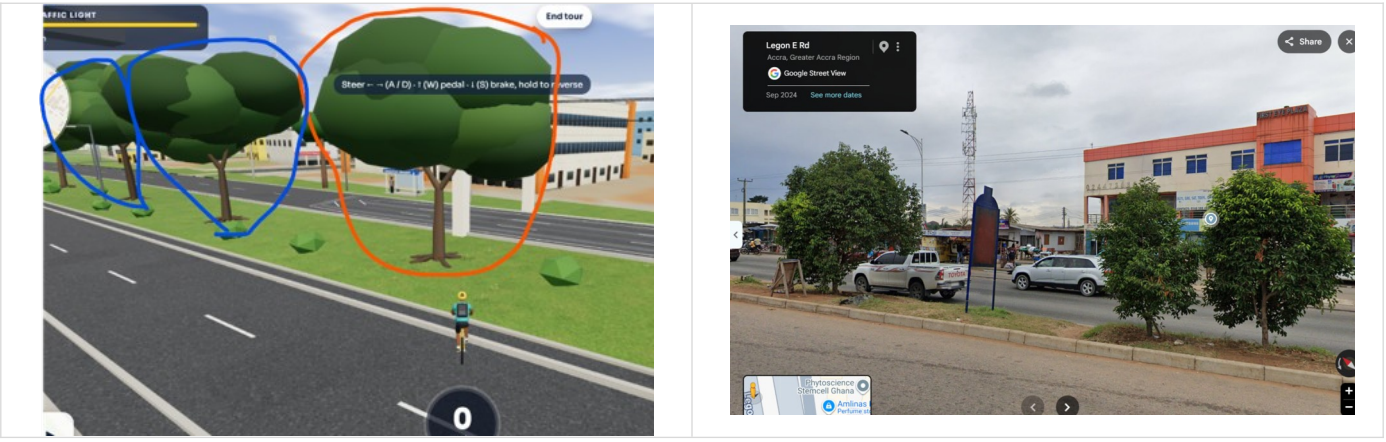

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game places several trees with almost identical high trunks and oversized umbrella-like crowns. The real view has a small dense tree at image left and shorter compact planting farther along the median. Tall commercial buildings and utilities should remain visible above and between the vegetation.

Step by step instructions for Claude

1. Use the same median group corrected in Pair 1. Establish the individual plant sequence from Pairs 1, 2 and 4 before editing; repeated views must not create extra trees. Anchor the sequence to the orange-front commercial block and road kerb.


2. Lower crown starts, shorten exposed stems and vary crown diameter. Use leaf clusters and branching rather than a single broad low-poly cap. Keep a few larger plants, but do not use the biggest reference crown as the template for the entire row.

3. Match the uneven spacing and empty intervals between the two road carriageways. Ensure crowns stay inside the reference planting envelope instead of hanging over both carriageways. Keep any visible protective frames or planting guards separate from tree geometry.

4. Maintain the actual signboards, electrical poles and overhead wires behind the row. Use mixed grass and soil rather than a flawless lawn. Preserve worn surfaces around roots and support bases without inventing exact landscaping dimensions.

5. Verify both median views with the same camera field of view. Passing means low compact foliage, several distinct sizes and readable gaps; merely reducing the large canopy polygon count does not fix the proportions.

Pair 3 Stadium edge vegetation and raised ground

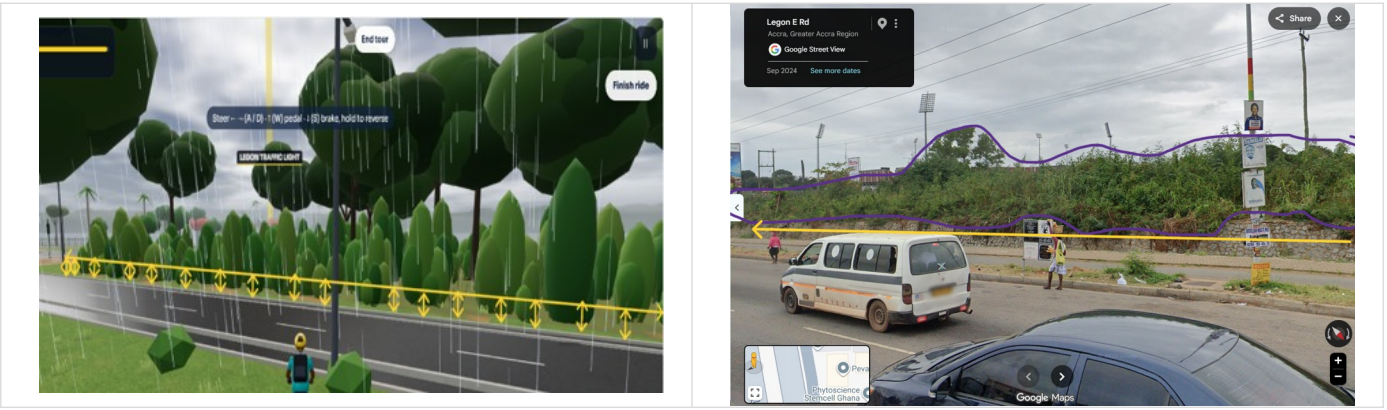

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game shows a screen of very tall trees and repeated vertical shrubs behind an exposed fence. The real purple outlines trace dense, uneven vegetation over raised ground; a low rough stone retaining edge and roadside path are visible below it. The yellow line follows this horizontal roadside boundary, not a row of decorative fence arrows.

Step by step instructions for Claude

1. Follow the owner-assigned Pair 3 arrow on A02. Establish the road, sidewalk and stadium-side property edge using map data and visible kerbs. The two viewing directions on the annotation are part of the same edge; do not relocate the view to the commercial side.

2. Build a local raised ground strip behind the sidewalk. Match the uneven upper vegetation silhouette and the relative height above road level. Use adjustable slope and retaining-wall parameters; the purple outline is an image guide, not a literal wavy mesh profile or an exact height survey.


3. Add the low irregular stone retaining face and its ground contact where exposed. Preserve local steps, recesses or breaks only if visible. Place the fence according to reference visibility and aerial evidence; do not leave a uniformly prominent fence where shrubs conceal it.

4. Replace the repeated tall hedge cones with dense varied shrubs, small trees and occasional taller trees. Keep stadium light poles above the canopy at supported positions. Match exposed soil, rough grass, litter-scale surface variation and the sidewalk without turning annotation strokes into objects.

5. Compare the Pair 3 skyline and road-level edge. The corrected scene must show a planted raised boundary and uneven canopy, with stadium lighting visible behind it and no wall of identical tall trunks.

Pair 4 Long median view toward the junction



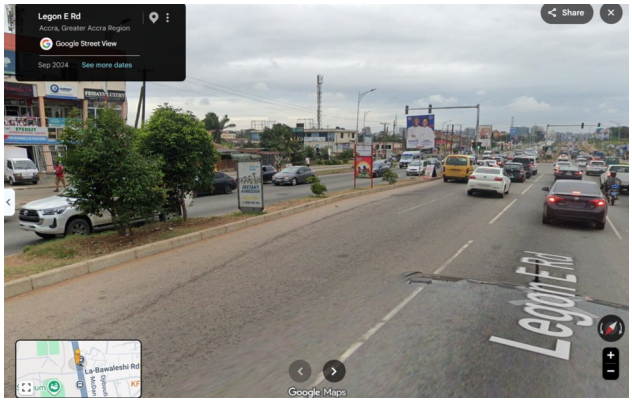

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game repeats tall, oversized trees along a clean green median. The real view shows a more open corridor with small trees, low shrubs, billboards and varied bare-ground patches. The circled foreground tree dominates the game view far more than the reference planting.

Step by step instructions for Claude

1. Use A02 arrow 4 to set the forward road direction. Match the vanishing point and the building positions before comparing size. Reuse the tree assets and positions established from Pairs 1 and 2 rather than building a second median row.

2. Reduce the foreground circled crown and exposed trunk, then audit the full visible sequence into the distance. Keep perspective scale consistent; distant crowns should diminish naturally, rather than assigning every tree a different arbitrary size to imitate the screenshot.

3. Introduce the real small plants and open gaps between advertising posts. Rebuild the median ground as grass mixed with soil and worn access paths, keeping sign supports outside the cycling lane and preserving kerb continuity.

4. Match the actual spacing of poles, overhead wires and road-side boards from the overlapping views. Preserve usable road width and signals where supported. Do not add boards solely because Google Maps overlays display a location label.

5. Capture the long road view again. Most crowns must sit lower, the median must appear more open, and signs should punctuate the corridor. Confirm the Pair 1 and Pair 2 views still match after this edit.

Pair 5 Orange-front commercial plaza





In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game uses long continuous dark window bands, largely blank ground-floor walls and repeated orange fins. The real plaza has a dominant orange tiled central vertical feature with blue glazed panels, discrete upper windows, an open recessed middle-level gallery, ground-floor shop grilles and many business signs. The name on the upper orange feature is omitted.

Step by step instructions for Claude

1. Use A02 arrow 5 and the footprint in existing map data to locate this plaza. Combine Pairs 5 and 6 into one building. Set the frontage, side depth and ground setback before façade detail; do not duplicate the block for its corner view.


2. Replace the repeated orange fins with the reference orange central volume and parapet treatment. Preserve the visible ground shop level, open gallery above it and upper enclosed level, using their relative proportions. Replace continuous strip windows with the discrete window rhythm and explicit columns and openings.

3. Give the central orange feature a panel or tile grid, separate blue glazed inset areas and real recess depth. Add the middle gallery railing, visible shop grilles, doors and awnings. Separate plaster, orange cladding, glass and metal materials; avoid black rectangles representing every opening.

4. Reproduce the building-name letters on top of the orange feature. The sign appears to read FIRST EYE PLAZA; verify the original image at high zoom before final lettering. Use shallow extruded letters where thickness is supported and match spacing, backing and placement. Add the legible shop signs locally; leave blurred phone numbers adjustable.

5. Match the Pair 5 façade and Pair 6 corner together. The result should show one distinctive orange centre, gallery depth, discrete upper windows and signed ground shops, with believable weathering and no generic campus sign substituted for the business frontage.

Pair 6 Plaza corner shops and frontage ground

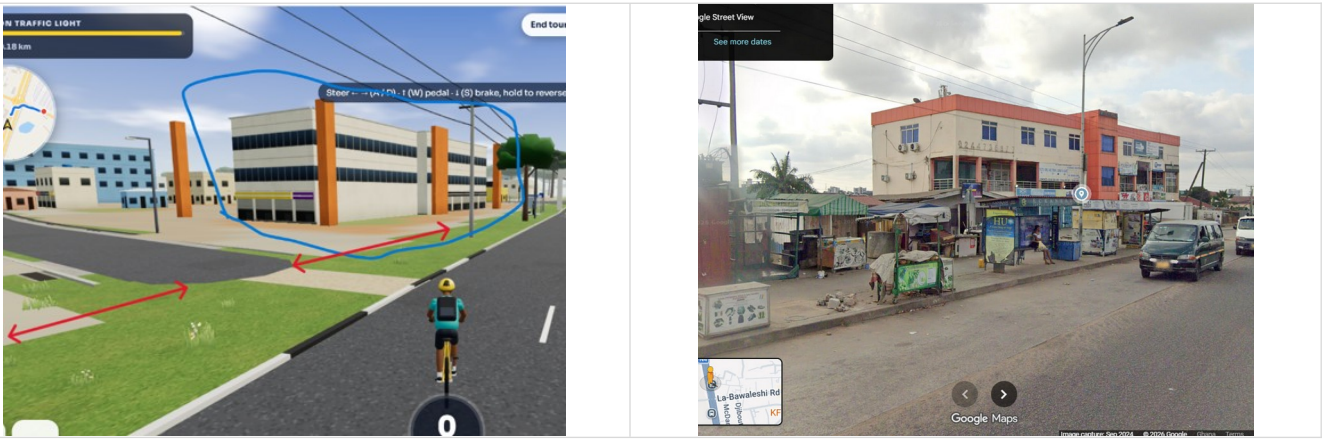

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game plaza sits beside an overly clean open forecourt with little frontage activity. The real corner contains small canopies, kiosks, shop signs, electrical units, pavement changes and a raised kerb along the carriageway. The red horizontal marks indicate the frontage alignment to be corrected.

Step by step instructions for Claude

1. Reuse the plaza object from Pair 5 and match A02 arrow 6. Establish its corner orientation and the true forecourt depth with the aerial. Follow the red line as a directional frontage guide, without converting it into a physical wall or exact measured span.


2. Correct the visible side elevation: cream plaster, upper individual windows, orange roof-edge fascia, air-conditioning units and service wires where discernible. Keep the open gallery and central orange feature coherent with the frontal view.

3. Model the smaller street-front structures as separate low canopies or kiosks with their visible roof slopes, supports and irregular setbacks. Do not replace the entire forecourt with one long shop awning. Avoid modelling unseen stall interiors or permanently freezing transient vendors.

4. Create the sidewalk, concrete slabs, kerb, driveway connections and worn frontage patches. Position raised steps or landings only where supported. Add supported signboards and visible pole bases; maintain drainage and road clearance without inventing an underground network.

5. Verify the corner silhouette and street-level transitions from both Pairs 5 and 6. The same plaza should explain both images, with a layered frontage instead of a bare grass strip and generic window bands.

Pair 7 Low roofed frontage and metal boundary

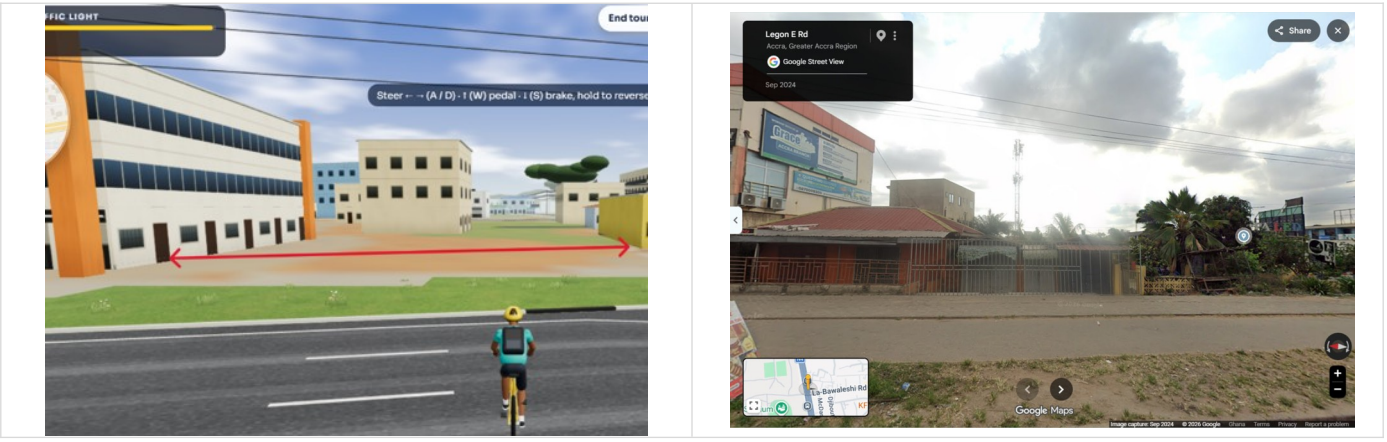

In-game view left | Real street view right | Placement and viewing direction A02

Visible mistakes The game replaces the horizontally marked edge with an open strip in front of generic blocks. The real reference has a low red-brown roofed structure and a continuous metal grille or fence boundary with a gate. The larger commercial building remains behind or beside it rather than replacing the low frontage.

Step by step instructions for Claude

1. Follow A02 arrow 7 and use the neighbouring plaza to register the low frontage. Identify the low roof footprint before deleting or moving taller blocks. Keep this edge connected spatially to Pairs 5 and 6 but do not merge separate structures into the plaza.


2. Build the low pitched red-brown roof, overhang and supports shown near the road. Preserve its horizontal profile and setback. Remove unsupported tall façade mass only where the aligned aerial and street view show the low structure instead.

3. Add the metal grille line and gate, with vertical bars, framing and the correct opening breaks. Follow the red annotation as boundary direction; keep any fence returns tied to actual plot corners. Separate gate collision from fixed fence collision.

4. Match the pavement strip, soil verge, concrete boundary bases and vegetation behind the grille. Retain palms and background trees where they occlude the property. Reproduce only legible physical signs and wall notices, not the Maps business marker.

5. Check that the low roof and metal boundary dominate the roadside edge while the taller plaza remains at the correct relative position. No bare open lawn should occupy the confirmed fenced frontage.

Pair 8 Small sign workshop and adjoining forecourt

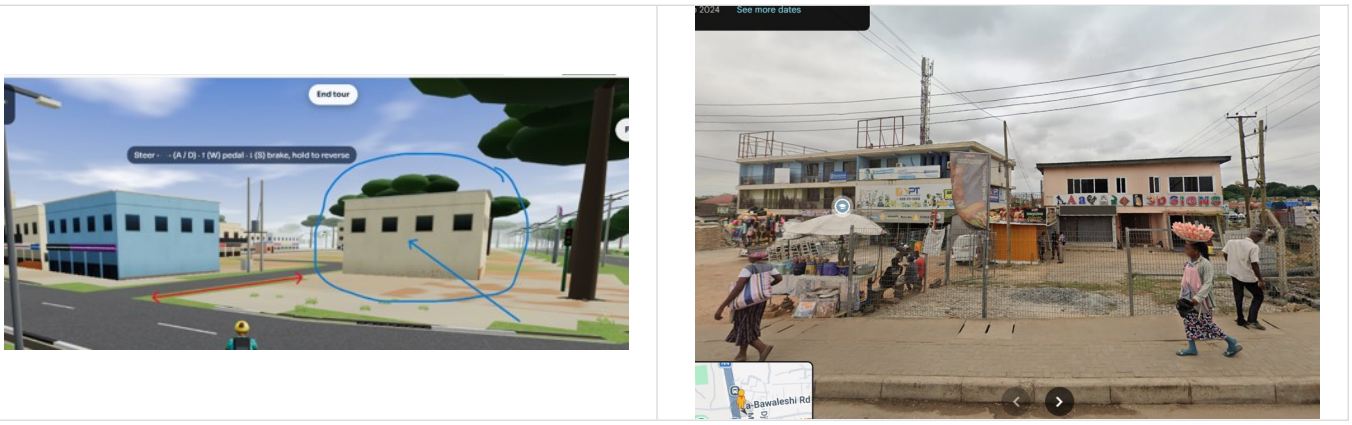

In-game view left | Real street view right | Placement and viewing direction A03

Visible mistakes The circled game building is a plain single box with small dark windows, no signed shopfront and almost no boundary detail. The real right-hand block has an upper row of larger windows over ground-level workshop bays, a shallow projecting dark roof edge and coloured signage. An open fenced gravel forecourt and a separate larger neighbour sit beside it.

Step by step instructions for Claude

1. Use A03 arrow 8 and trace the right-hand workshop footprint independently from the larger adjoining block. Keep the open forecourt shown between street and shops. Use the owner arrow to establish the facing elevation, not the billboard at the front as a building-location anchor.

2. Rebuild the small block with its visible two-level arrangement, upper window groups, lower bay widths and shallow roof overhang. Give doors, grille shutters and shop openings real recesses. Do not keep a one-level box merely because the upper band appears narrow.


3. Add the coloured physical lettering and logos along the shopfront fascia. Some letters are partly obscured; use confirmed visible fragments or request a clearer sign crop instead of inventing a full business name. Use raised lettering only where the image supports thickness.

4. Build the wire-mesh fence with thin posts and the actual gate or gaps. Replace perfect grass with gravel, compacted soil, pavement and frontage wear. Place the umbrella or stalls as optional lightweight dressing separate from permanent boundaries.

5. Match the visible neighbour, communication mast, power poles and wire direction after locating them. Passing means a signed workshop behind a fenced rough forecourt, not an isolated blank box; preserve access and avoid static pedestrians blocking the gate.

Pair 9 LED display shop façade



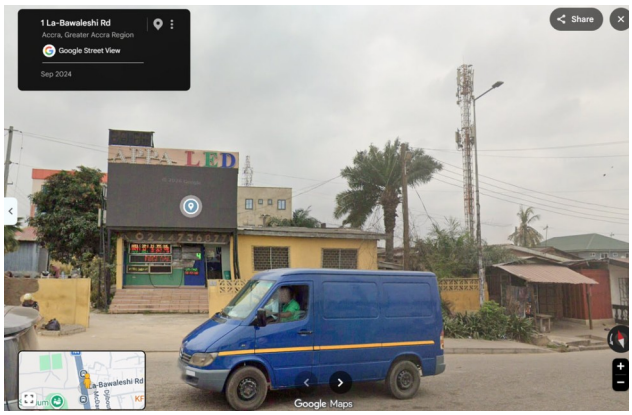

In-game view left | Real street view right | Placement and viewing direction A03

Visible mistakes The game makes the shop a long yellow arcade with a wide unlabelled black rectangle. The real shop is lower and more compact, with a taller central display stack, a near-square dark LED screen, coloured letters above it and a recessed green signed entrance reached by steps. The adjoining low yellow wing has gridded windows.

Step by step instructions for Claude

1. Use A03 arrow 9 for the viewing direction; it points across La-Bawaleshie Road toward this frontage. Match the plot footprint and distinguish the central sign/display tower from the low adjoining wing. Do not copy the width of the game arcade into the target.


2. Resize the display to the reference proportions and mount it above the entrance in a distinct vertical frame. Add the smaller upper panel and coloured letters that appear to read ALPHA LED, verifying their exact text from the original. A dark switched-off display should not be replaced by a permanently glowing screen.

3. Model the entrance recess, green shop glazing or sign surfaces, visible steps and lower threshold. Rebuild the yellow side wing with its low roof and gridded windows rather than repeated open arcade bays.

4. Add the low boundary wall, vegetation, palm and neighbouring shed where established. Match driveway and pavement height changes, worn concrete and soil. Keep the mast and electrical cables at supported relative positions without guessing their exact distance.

5. Check display width-to-height, sign placement and entry depth at a matched camera. The central tall display and smaller low wing must read clearly; the reference does not support one enormous continuous arcade frontage.

Pair 10 3D sign shop at the junction

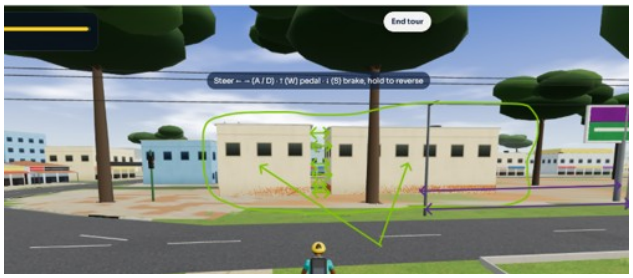



In-game view left | Real street view right | Placement and viewing direction A03

Visible mistakes The game shows a plain cream frontage with small openings and no physical building-name letters. The real junction façade carries large multicoloured 3D SIGN SHOP lettering on a dark fascia, smaller advertisements below, upper windows, an uneven layered roof profile and nearby traffic signals and utility structures.

Step by step instructions for Claude

1. Use A03 arrow 10 to register the junction façade and reconcile it with Pair 11. Model one shop property with a foreground frontage and taller rear or adjoining mass where supported; do not assume every roof height belongs to one uniform extrusion.

2. Correct the main façade widths, visible upper opening groups and projecting fascia. Match the low roof edge over the sign-front section and the taller background mass separately. Preserve actual shop recesses and shutter panels below the fascia.


3. Create the readable 3D SIGN SHOP letters individually, with the reference colours, outlines, spacing and shallow relief. Their thickness should produce small edge shadows, not deep block-like projections. Keep signs attached to the façade and distinguish them from the small posters beneath.

4. Rebuild the signal poles and visible lamp heads, paired electrical supports, wire spans and the green boundary wall continuing beside the shop. Position these from the shared junction layout so the traffic signal does not float in the middle of a revised driveway.

5. Verify the same lettering and structure from the wide Pair 10 and close Pair 11 cameras. Test junction cycling clearance and signal visibility. Do not infer signal timings, hidden electrical equipment or rear floor counts from the occluded view.

Pair 11 Close view of raised shop lettering



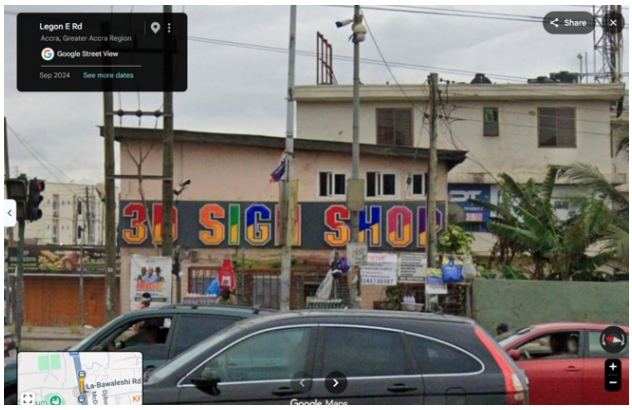

In-game view left | Real street view right | Placement and viewing direction A03

Visible mistakes The horizontal blue marks point to blank wall where the real façade has the large multicoloured 3D SIGN SHOP fascia. The game's squat box also loses the roof projection, upper windows, posters and physical frontage depth. The nearby traffic signal is only a rough substitute for the actual junction equipment.

Step by step instructions for Claude

1. Edit the existing shop property corrected under Pair 10. Use A03 arrow 11 to match this closer angle and compare fascia height against the window row above it. The blue marks specify the sign band and direction; they are not railings or painted wall stripes.


2. Build the dark fascia backing and attach the individual relief letters with local depth and outline layers. Match the visible red, orange, green, blue and purple variation letter by letter after zooming the source. Keep the sign large enough to read from the street, but do not invent exact millimetre thickness.


3. Correct the upper white-framed window groups and roof overhang, then add the lower shutters, advertisements and service details visible between the poles. Do not bake a photograph containing cars or poles into the building texture.

4. Align the adjacent utility supports and traffic signal with Pair 10. Restore the sidewalk, patchy frontage soil, low wall and actual entrance setbacks. Make small advertisements readable only where the image supplies text; otherwise retain their visual blocks without fabricated wording.

5. Capture the sign close-up with ordinary lighting. Passing means raised colourful letters casting restrained shadows against the dark backing, correct roof/window relationships, and the same shop identity from both views.

Pair 12 Long boundary wall beyond the sign shop

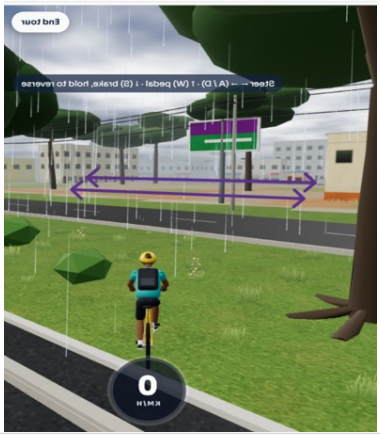

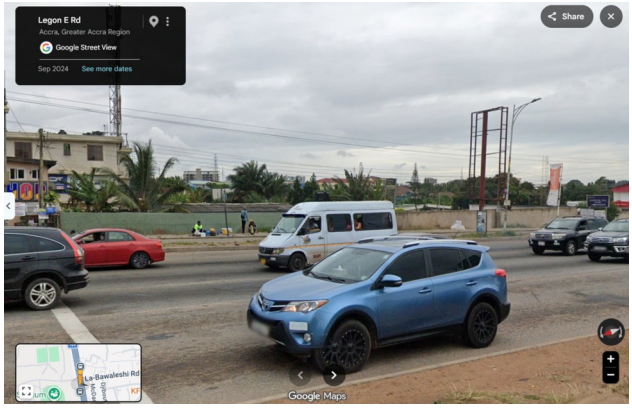

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The game leaves the purple-marked strip open between generic buildings. The real view has a long green boundary wall enclosing a planted plot, with palms and other vegetation rising behind it. The game screenshot is horizontally mirrored, as indicated by reversed HUD text, so its apparent left–right direction must not control world placement.

Step by step instructions for Claude

1. Anchor Pair 12 using A04 and the real photograph. Keep the original mirrored game image unchanged in the reference document; create a temporary flipped diagnostic view only if useful for comparison. Do not mirror the whole game scene or reinterpret the owner's map arrow.


2. Trace the wall run and plot corners using the aerial, preserving the owner's purple horizontal direction. Build the visible green plastered wall at the correct roadside setback with its base and cap. Add gates or breaks only where another reference confirms them.

3. Place the enclosed vegetation behind the wall: palms and varied dense shrubs that conceal parts of the plot. Remove or relocate generic game façades only where the aerial and street view establish open planted space, not merely because foliage hides the buildings.

4. Restore the roadside sidewalk, worn verge and sign-frame bases along the wall. Keep existing poles and wire spans coherent with the junction views. The tall empty advertising frame farther along is not a new building or an invented filled billboard.

5. Verify with the real camera and A04 direction: the long wall should bound a planted plot and continue consistently toward Pairs 13–16. Log mirrored-image handling explicitly in Claude's comparison output.

Pair 13 Open road edge and empty sign frames

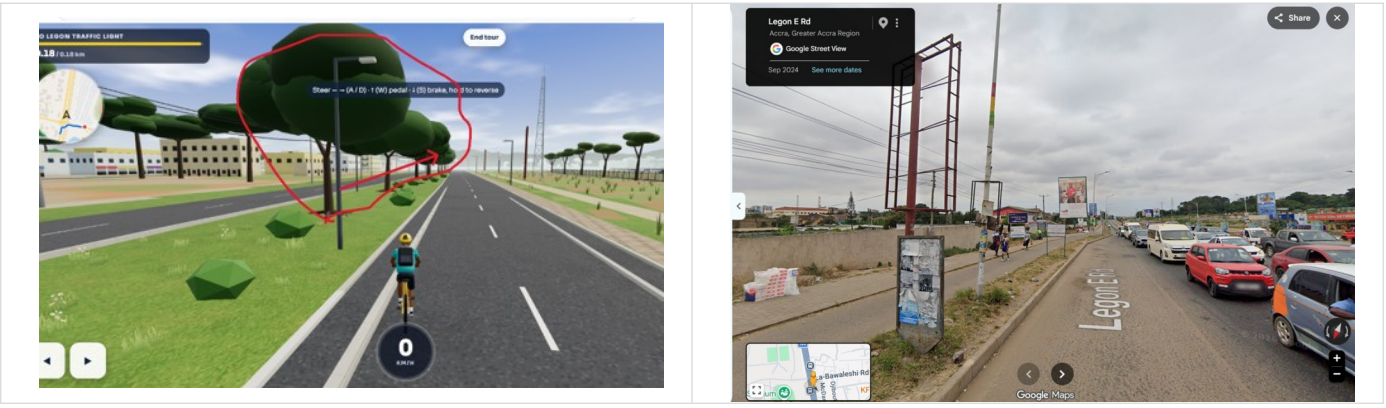

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The circled game row has large trees along a smooth green median. The real view shows a mostly open corridor, bare or patchy ground, a long low wall, advertising supports including an empty tall metal frame, and smaller plants. A regular row of large crowns is unsupported at the marked stretch.

Step by step instructions for Claude

1. Use A04 arrow 13 to establish this road direction. Audit the circled tree group only within the matched corridor. Reconcile the low wall from Pair 12 and the commercial frontage location from Pairs 15–16 before editing.


2. Remove the specific unsupported large roadside or median trees where multiple overlapping views show open ground. Replace them with the few low shrubs or saplings actually visible. Do not remove background trees across the property boundary.

3. Create the tall empty advertising frame with its narrow metal members and visible supporting base; keep it empty. Add separate smaller filled signboards at their observed spacing. Match utility and street-light poles without merging them with advertising posts.

4. Match the concrete sidewalk and kerb, thin grass patches, bare soil and wall weathering. Keep the broad road direction and lane structure tied to map data and visible road markings; avoid extending the game's decorative median lawn beyond its actual boundary.

5. Compare the distant road skyline: openness, metal frames and poles should replace the solid canopy wall. Confirm that the change agrees with Pair 14 rather than treating two camera positions as separate tree rows.

Pair 14 Median shrubs and advertising boards

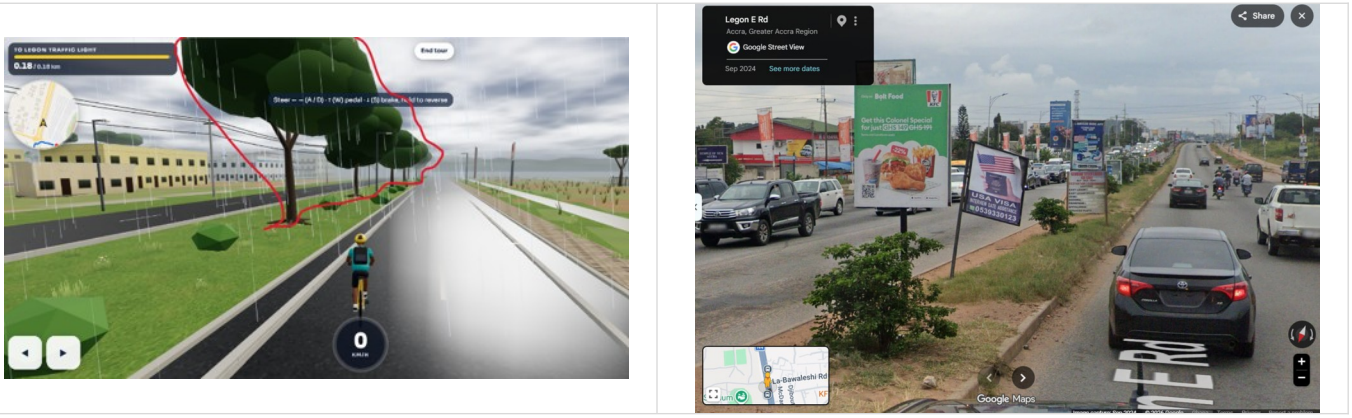

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The game's continuous line of tall trees hides much of the street. The real median has small low shrubs and advertising boards with open gaps and worn soil. Board sizes, supports and spacing vary; the game does not reproduce this pattern.

Step by step instructions for Claude

1. Use A04 arrow 14 for the road direction and reconcile the plants with Pairs 1, 2, 4 and 13 where their coverage overlaps. Establish planting zones along the median; do not create a new tree at every reference camera position.


2. Replace the large trunks and crowns at this stretch with compact low shrubs. Preserve a few larger plants only at supported locations. Use low branching and irregular foliage density instead of miniature copies of the tall umbrella asset.

3. Add the visible boards as separate objects with their observed aspect ratios and supports. The green KFC board and nearby visa board are image-visible advertising examples; match their captured graphics or confirmed wording without treating promotional prices as current factual information.

4. Rebuild the median surface with exposed soil, thin grass, rough edges and local erosion. Place boards and plants clear of kerbs and vehicle lanes. Keep roadside lights, wiring and remaining distant frames aligned to the same corridor.

5. Check that advertising boards punctuate an open, low-planted median. The camera should see between and over most shrubs. The target is the photographed scene, not an evenly spaced line of giant canopies or identical boards.

Pair 15 Leasafric frontage and entrance

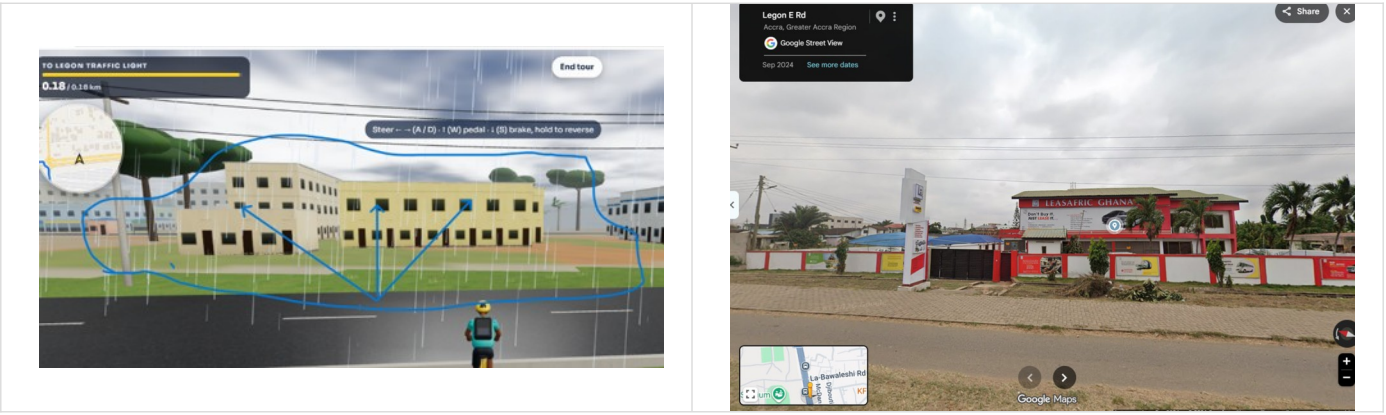

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The game replaces the commercial property with disconnected cream blocks on open grass and soil. The real frontage has a red-and-white two-level office, low boundary wall, black vehicle gate, tall freestanding branding pylon, palms and a paved sidewalk. The building's large name and advertising façade are omitted.

Step by step instructions for Claude

1. Use A04 arrow 15 and map-data footprints to locate the property. Reconcile Pairs 15 and 16 into one Leasafric building and compound. Set the wall, entrance and building setback before façade detail. Do not retain extra generic blocks inside the confirmed forecourt.


2. Rebuild the visible two-level mass with its shallow pitched roof, broad eaves, red façade framing and white recessed wall areas. Match the rectangular windows and ground-floor opening rhythm rather than repeated dark holes. Keep lower structures behind the wall where supported by the aerial.


3. Build the low white boundary panels with red posts and coping. Add the black vehicle gate at the entrance and the tall narrow white branding pylon beside it. Match the sidewalk block texture, grass verge and driveway level transition.

4. Add physical LEASAFRIC GHANA lettering and the larger advertising frontage from the captured view. Use individual relief letters where their shape and depth are visible, and flat graphic panels for the vehicle advertisements. Do not replace them with a floating place label.

5. Place palms and clipped shrubs with the reference spacing and canopy scale. Verify gate, pylon, office roof and signed façade together from both views. Preserve driveway collision and visibility at the main road.

Pair 16 Leasafric side view and wall graphics

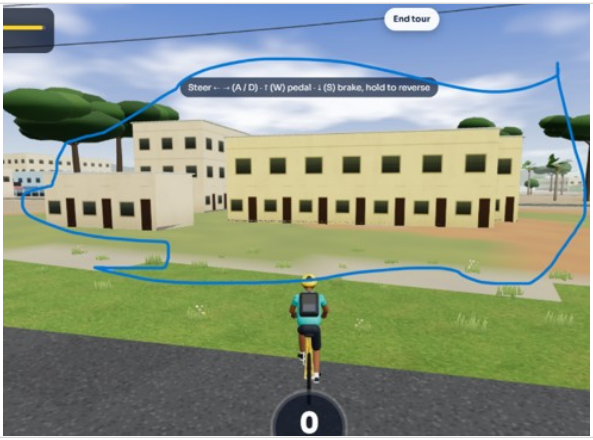

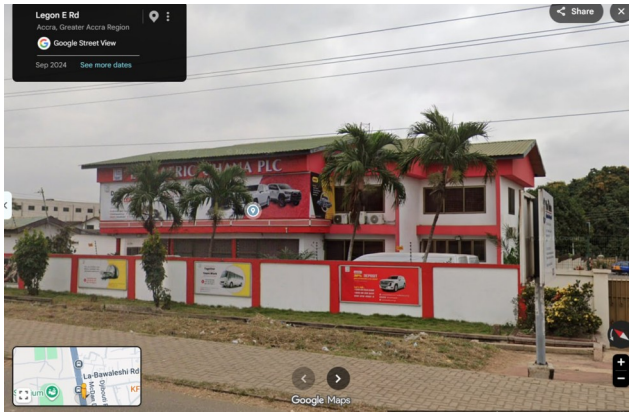

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The game's circled long cream block has no boundary wall, palms, branded frontage or correct roof treatment. The real same-property side angle shows red structural framing, white walls, a shallow overhanging roof, air-conditioning units, large signage and advertising panels on the low wall.

Step by step instructions for Claude

1. Reuse the compound from Pair 15. Use A04 arrow 16 to orient the visible façade and return wall. Align the signed upper band and entrance with the shared footprint instead of generating a second office block.


2. Correct façade depth, red-and-white material separation, rectangular glazing and side returns. Model the overhanging roof and supported service units separately. Remove the game's taller generic adjoining mass only where it conflicts with the verified property layout.

3. Extend the low wall with white panels, red posts and red coping. Attach individual advertising panels at their reference positions, distinguishing panel graphics from raised building-name lettering. Preserve blank wall panels where they are blank in the reference.

4. Place the palms inside the wall, smaller trimmed plants near the sidewalk and the tall pylon at the entrance. Match interlocking pavement blocks and a narrow rough verge rather than a flawless lawn. Keep exposed wires and pole positions consistent across the street.

5. Compare with Pairs 15 and 16 using the same building object. Passing means the wall and palms partly screen the lower façade while the branded upper frontage and roof remain visible. Do not scale plants simply to hide unresolved geometry.

Pair 17 Pro Vision property boundary and entrance

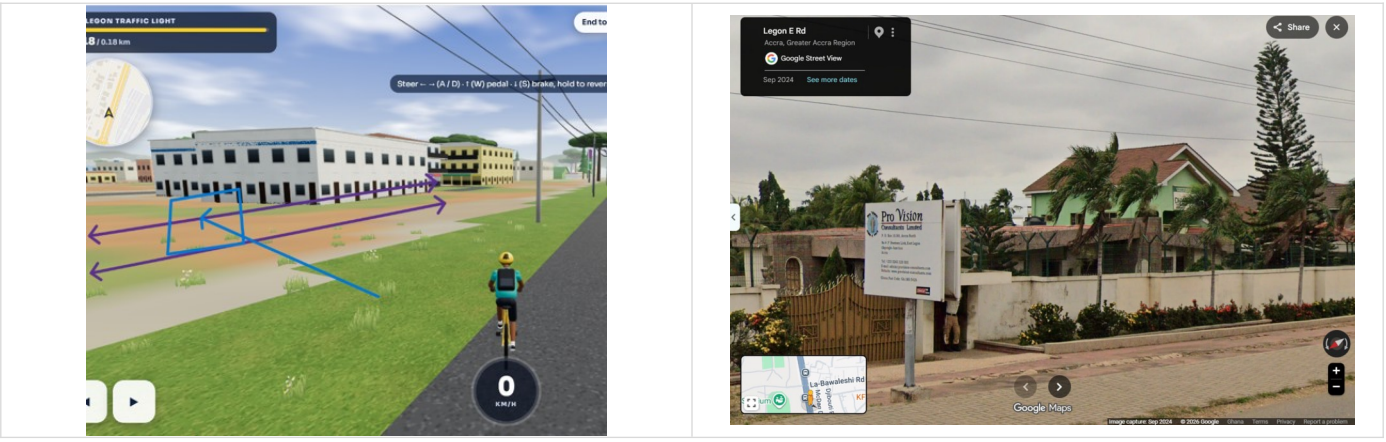

In-game view left | Real street view right | Placement and viewing direction A04

Visible mistakes The game has a generic white institutional block at the roadside with no real property enclosure. The real view contains a low stone-faced structure, a taller green gabled building behind it, cream boundary wall, security fence, ornate metal gate, freestanding Pro Vision sign and dense flowering planting.

Step by step instructions for Claude

1. Use A04 arrow 17 to identify the frontage and plot limits. Trace the low front roof and taller rear green roof separately from the aerial. The purple marks define the boundary direction; the blue mark highlights the entrance or sign location, not a new detached building.


2. Replace the unsupported generic façade with the reference massing: low stone-faced front structure and the partly concealed green gabled building behind. Match red-brown roof slopes, eaves and relative heights without guessing hidden rooms or storey counts from an occluded wall.


3. Build the cream boundary wall and its entrance pillars, the decorative gold-toned metal gate and the dark security fence above or behind the wall where visible. Add the continuous flowerbed and planted frontage. Keep the real gate opening usable in the collision layout.

4. Create the freestanding white Pro Vision Consultants Limited sign with its visible heading, logo and support posts. Reproduce fine text only if legible at source zoom. This is a signboard, not automatically extruded lettering on the building. Include palms and the tall slender conifer at supported positions.

5. Match the sidewalk, driveway and wall height from the street view. Passing means a planted enclosed property with layered roofs and a distinct entrance sign, not an unbounded office block on bare lawn.

Pair 18 Diamed and neighbouring property from the main road

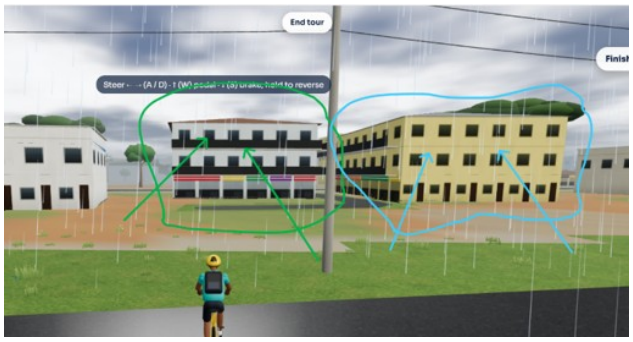

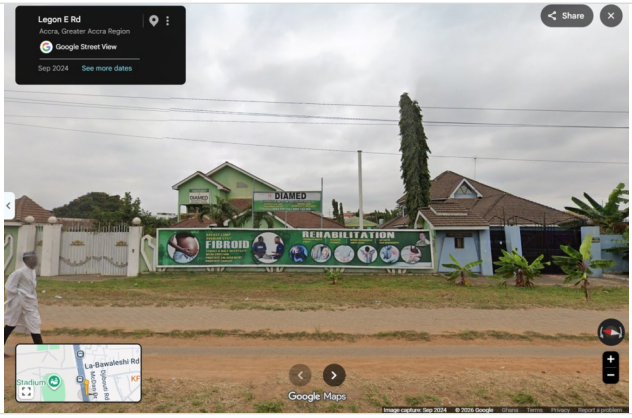

In-game view left | Real street view right | Placement and viewing direction A05

Visible mistakes The green-circled game building is a three-level shop-like block with black horizontal bands and coloured strips. The blue-circled neighbour is another generic tall block. The real view instead has a green gabled property behind its wall and a lower blue roofed neighbour, with wall signs, gates, a narrow tall tree and grass or soil frontage.

Step by step instructions for Claude

1. Use A05 arrow 18 and retain the owner's green and blue object assignments. Associate the green property with Pair 19 and the blue neighbour with Pair 20. These views describe the same two plots from different roads; do not build four separate properties.

2. Rebuild the green property as the taller green roofed mass plus lower front structures supported by Pair 19. Rebuild the adjacent blue property from Pair 20 with its own pitched roof and curved balcony canopy. Remove commercial arcade bands and coloured shop-strip materials from these objects.


3. Trace the shared roadside boundary runs, gates and setbacks from A05. Build the green-and-white decorative wall for the Diamed plot and the blue enclosure for its neighbour. Preserve the separation between plots and actual driveway entrances.

4. Add the visible DIAMED signs and the long FIBROID and REHABILITATION graphic banner along the main-road frontage. Distinguish printed banner graphics from raised text. Include the narrow tall tree, banana planting, lawn patches and dusty pedestrian verge where supported.

5. Verify the main-road pair and both McDan Drive pairs together. Roof heights and enclosure lines must agree across all three cameras. Avoid inventing medical service details beyond the text visible in the reference signs.

Pair 19 Diamed green building on McDan Drive



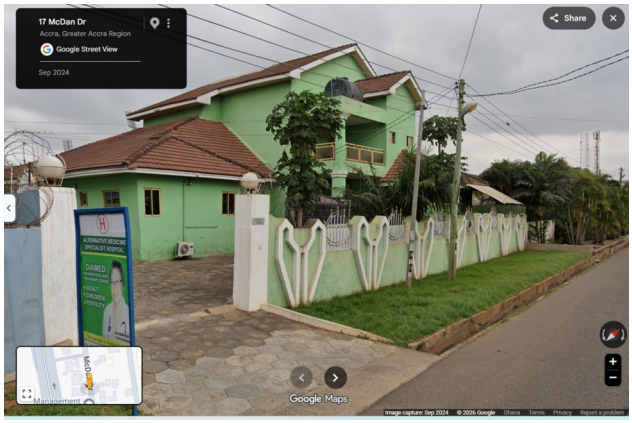

In-game view left | Real street view right | Placement and viewing direction A05

Visible mistakes The game represents the green-circled target as an open white three-level commercial block with black bands and retail stripes. The real green property has articulated pitched roofs, a low front volume, a taller rear volume, a recessed balcony, green-and-white decorative wall panels, entrance posts and a patterned driveway.

Step by step instructions for Claude

1. Use A05 arrow 19 and the shared property established in Pair 18. Match the McDan Drive frontage and place the gate opening at its actual setback. Preserve the same main-road compound boundary rather than rebuilding this as a separate hospital.


2. Replace the flat commercial form with the low front roof and taller green gabled mass, including visible projecting roof intersections and deep eaves. Model the balcony recess and railings, discrete windows and low entrance roof. Keep uncertain rear roof spans adjustable.

3. Apply the green plaster, white edge details and red-brown roof-tile materials locally. Remove black horizontal façade bands and retail stripes. Add the visible air-conditioning unit and exposed service wires only at their supported positions.

4. Build the decorative wall rhythm with green panels, white angular outlines, metal fence portions, barbed or razor-wire security detail where visible and white entrance posts with globe fixtures. Match the driveway's large irregular paving shapes, kerb, grass verge and nearby signboard.

5. Place the tree and planting so they partially screen the balcony and walls. Check from Pairs 18 and 19 that the same roof sequence and boundary remain coherent, the driveway meets road level, and no wall collider blocks the visible entrance.

Pair 20 Blue neighbouring building and curved balcony

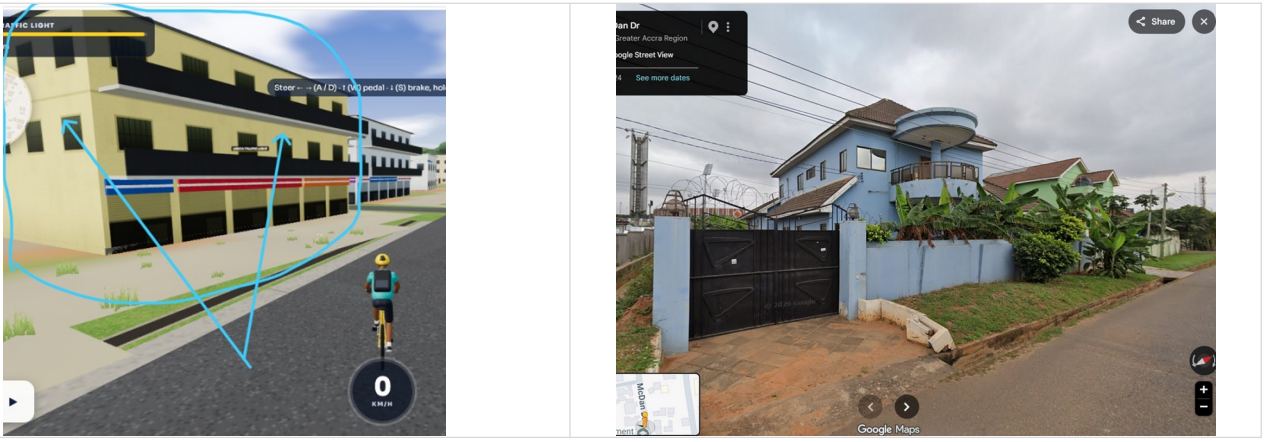

In-game view left | Real street view right | Placement and viewing direction A05

Visible mistakes The game uses a yellow commercial block with black strips, repeated openings and arcade-like ground bays. The real blue property has a pitched tiled roof, a rounded projecting canopy above an upper balcony, different window groups, a high blue wall, black gate, lush banana plants and a sloping driveway with a small drain edge.

Step by step instructions for Claude

1. Use A05 arrow 20 and the blue target assignment from Pair 18. Match the plot and street setback independently from the green neighbour. Preserve their adjacency and distinct gates; do not join both properties into one long commercial block.


2. Rebuild the visible blue upper mass and pitched brown tiled roof. Model the rounded projecting balcony canopy with its curved edge, supporting column and railing beneath it. Make the curved feature actual geometry rather than a semicircle painted onto a flat façade.

3. Replace black horizontal bands and retail stripes with blue plaster, discrete window groups, roof eaves and lower roof returns. Keep glazing and frame materials separate. Match the balcony depth and height relative to the roof using this close angle and Pair 18.

4. Add the black metal vehicle gate and high blue boundary wall, security wire where visible, dense banana leaves and shrub screening. Shape the driveway to the road and reproduce the worn paving, exposed soil, grass bank and visible broken or segmented concrete drainage edge without inventing hidden pipework.

5. Verify the blue canopy silhouette, gate position and vegetation from both camera directions. Test collisions at the gate, verge and drain. The target is an enclosed residential-scale form, not an open retail arcade.

Pair 21 Stadium roadside structures and retaining edge

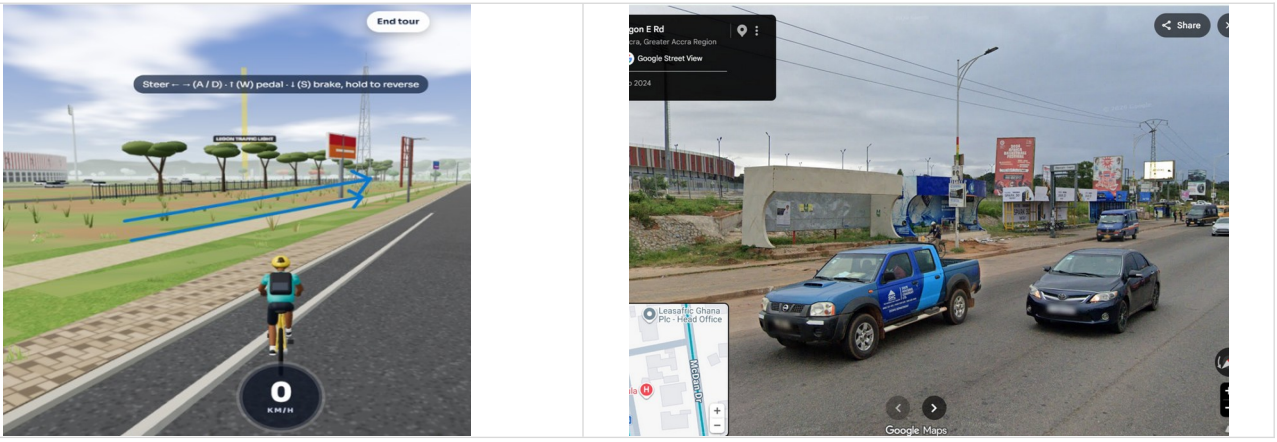

In-game view left | Real street view right | Placement and viewing direction A01

Visible mistakes The game shows a broad flat-looking green stadium verge with regularly repeated trees and a simple fence. The real view contains a raised stadium edge, rough stone retaining face, dusty or worn footpath, a substantial cream curved-ended roadside structure with an inset grey panel, a second blue structure and a cluster of signs. These distinctive forms are missing.

Step by step instructions for Claude

1. Use A01 arrow 21 to establish the stadium-side view opposite the Leasafric stretch. Keep the replaced real reference image as the Pair 21 target. Reconcile the stadium perimeter with Pair 3 while allowing local terrain differences between the two locations.

2. Shape the ground from road and sidewalk to the higher stadium-side verge. Build the visible retaining stone face, exposed soil, low vegetation and worn access paths. Keep stadium fencing and the stadium bowl behind them at supported setbacks rather than placing all features on one flat grass plane.

3. Reconstruct the cream roadside structure with its broad horizontal top and curved end profiles, recess and inset grey board. Model the nearby blue structure separately with its own curved profile and roof or upper panel. Their exact function is not established; do not replace both with one generic bus shelter or invent benches inside them.

4. Add the supported signboard cluster and street-light pole, including different board sizes, frames and bases. Preserve legible reference graphics without turning Maps overlays into signs. Adjust tree placement to the real open verge; retain only supported small or occasional larger trees.

5. Check the Pair 21 skyline and ground profile: distinct cream and blue structures, the stone retaining edge, rough verge and varied signs should be visible with stadium mass behind. Verify this against A01, not against the duplicate game image originally uploaded.

A01 Annotated aerial view Pair 21



A01 Screenshot 2026-10-13 044256.png

Preserve arrow 21 across the road toward the stadium-side strip. Leasafric is an alignment landmark on the opposite side, not the subject of Pair 21. This crop establishes relative position and viewing direction; the street photograph establishes the roadside structure shapes.

A02 Annotated aerial view Pairs 1 to 7



A02 Screenshot 2026-10-13 044624.png

Keep all owner-numbered directions: 1 and 2 along the median, 3 toward the stadium-side vegetation, 4 along the road, and 5 to 7 across to the commercial frontages. Retain both marked directions for Pair 3. Use roof footprints and junction edges for layout, not label-marker positions as surveyed entrances.

A03 Annotated aerial view Pairs 8 to 11



A03 Screenshot 2026-10-13 044604.png

Preserve each arrow at the La-Bawaleshie Road junction. Pair 9 faces the LED frontage across the side road. Pairs 10 and 11 are views of the same signed property. Pair 8 covers the adjoining workshop and forecourt. The aerial identifies plot relationships while street images identify elevations.

A04 Annotated aerial view Pairs 12 to 17



A04 Screenshot 2026-10-13 044529.png

Keep the owner directions for the wall and road corridor in 12 to 14, Leasafric in 15 and 16, and the next property in 17. Match physical building footprints rather than assigning the nearby Google business marker to every façade. Do not reinterpret the arrow because Pair 12’s game screenshot is mirrored.


A05 Annotated aerial view Pairs 18 to 20



A05 Screenshot 2026-10-13 044457.png

Preserve Pair 18's separate green and blue target directions. Link the green target to Pair 19 and the blue target to Pair 20 on McDan Drive. A label such as Yesh Formula does not override the owner's assignments or the photographed Diamed signs.


M01 Game map view Game map overview

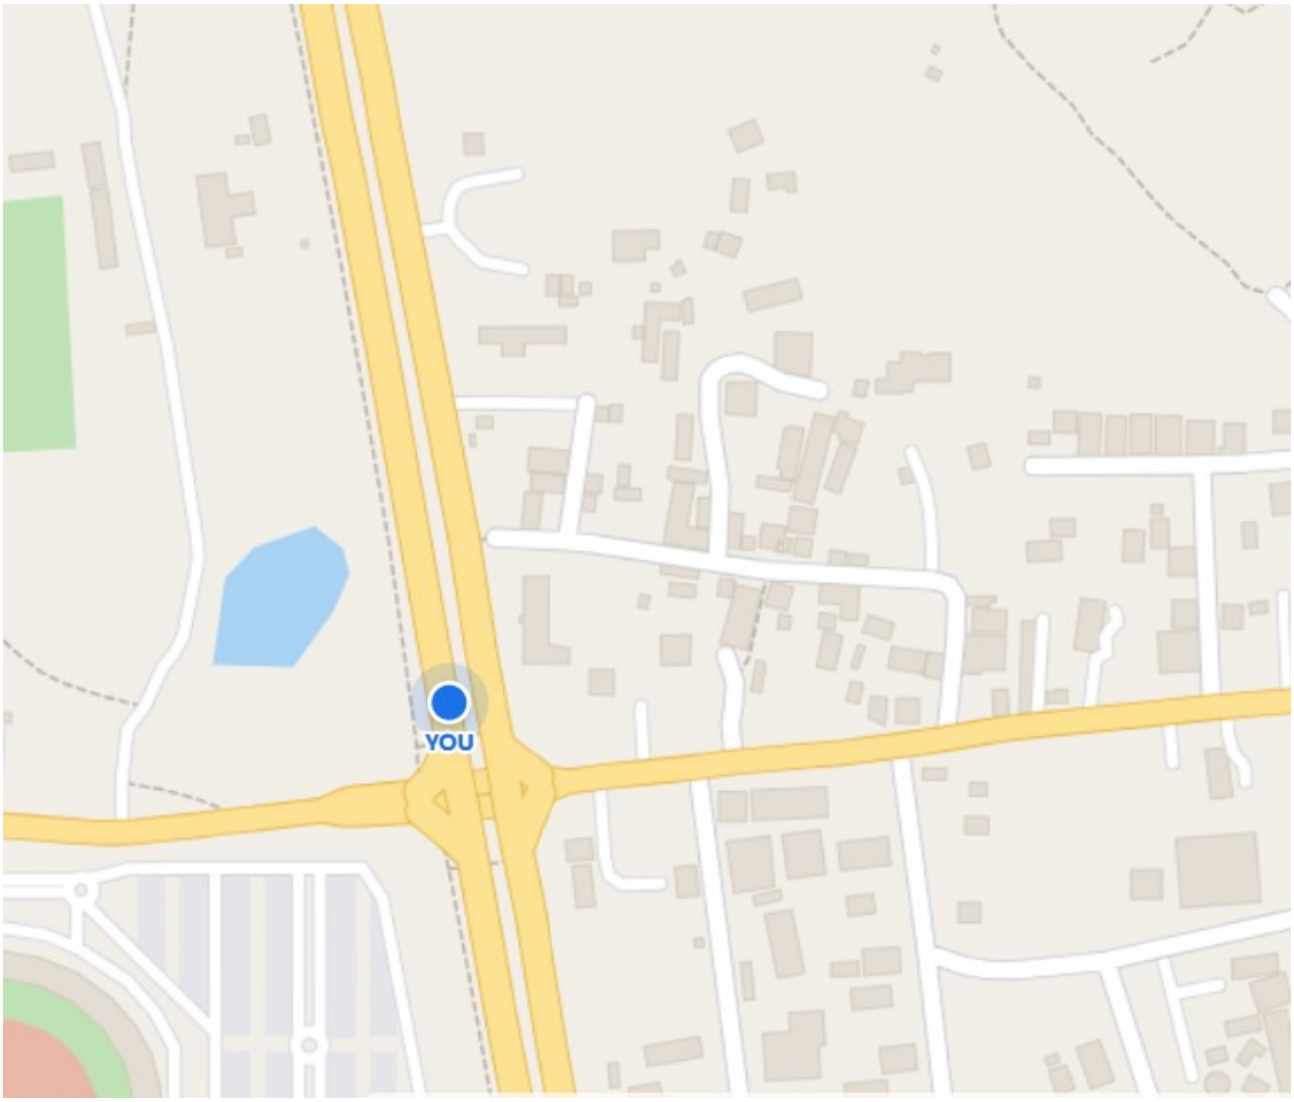

M01 Screenshot 2026-10-13 052231.png

Inspect existing map data near the major junction and stadium edge. This 2D screenshot shows footprint symbols and roads; it does not establish generated building heights, roofs, materials or correct junction geometry in the 3D scene.


M02 Game map view Game map toward Diamed

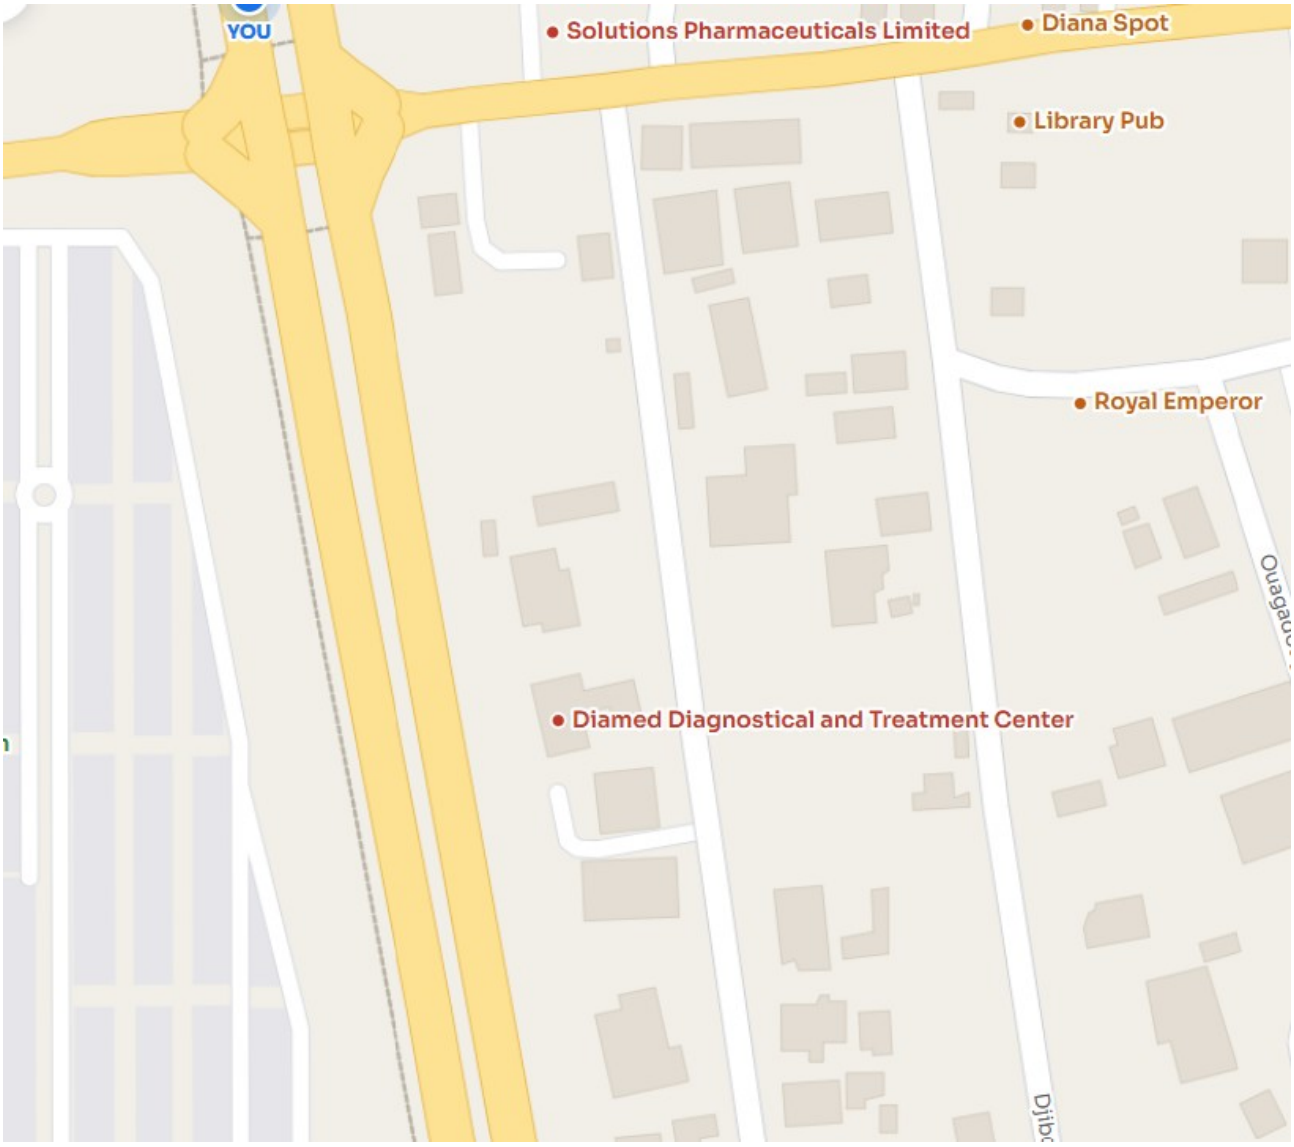

M02 Screenshot 2026-10-13 052310.png

Locate the southern frontage and the Diamed map label, then verify each scene object against A04 and A05. A map point is an anchor to investigate, not proof that a generic extrusion matches the real property.


M03 Game map view Game map northern junction detail

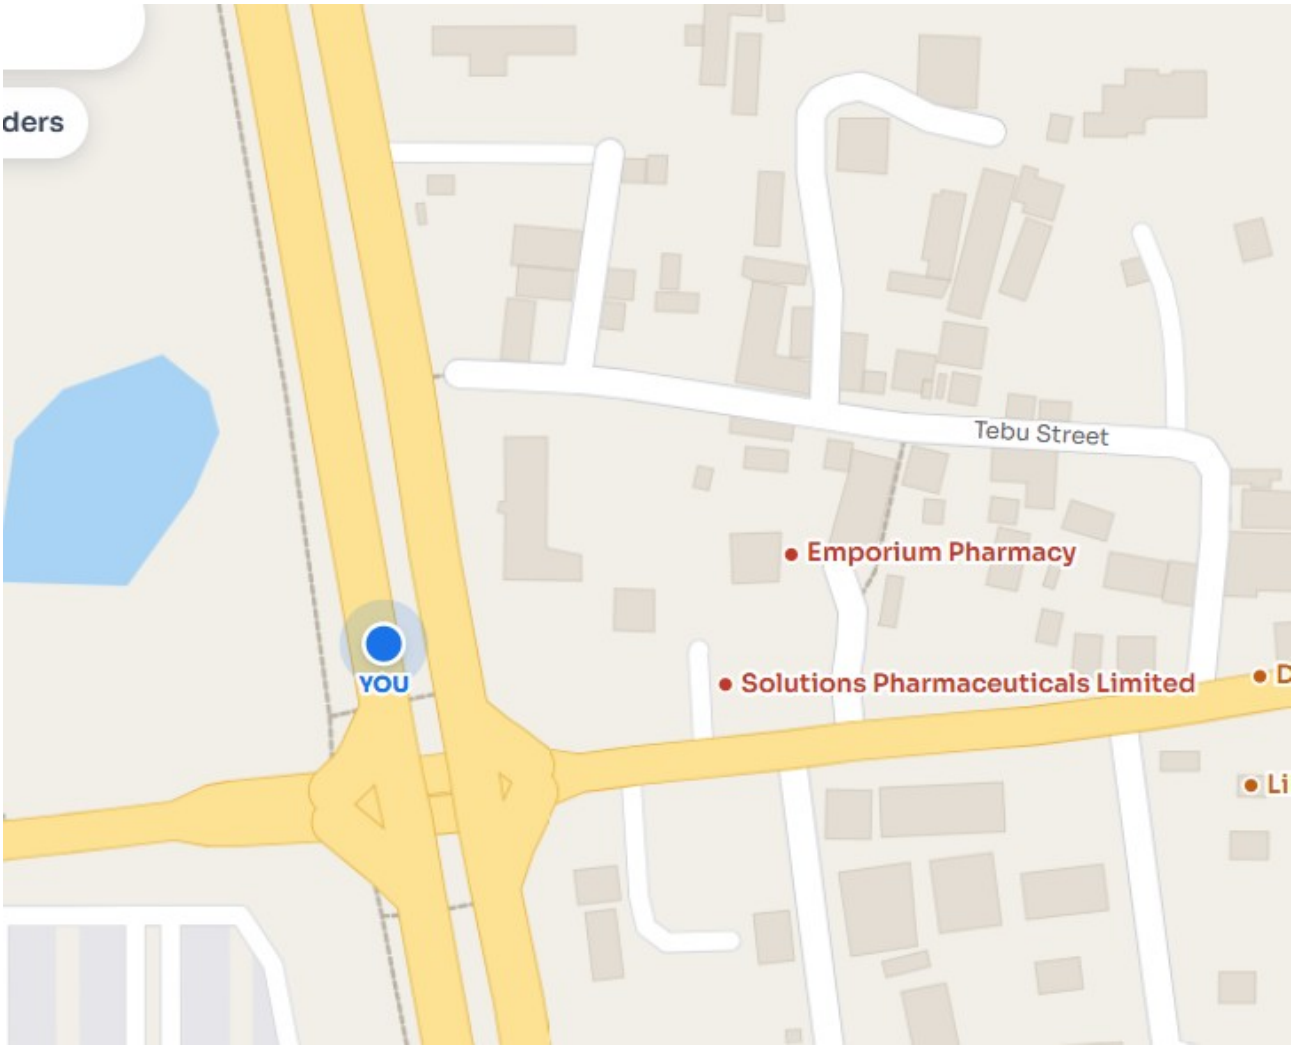

M03 Screenshot 2026-10-13 052301.png

Inspect the road connections and small footprint records around the northern side. Keep map labels separate from physical signs. Confirm the real crossroads and signal layout before preserving or changing any roundabout-like symbolic junction shape.

M04 Game map view Game map wider corridor

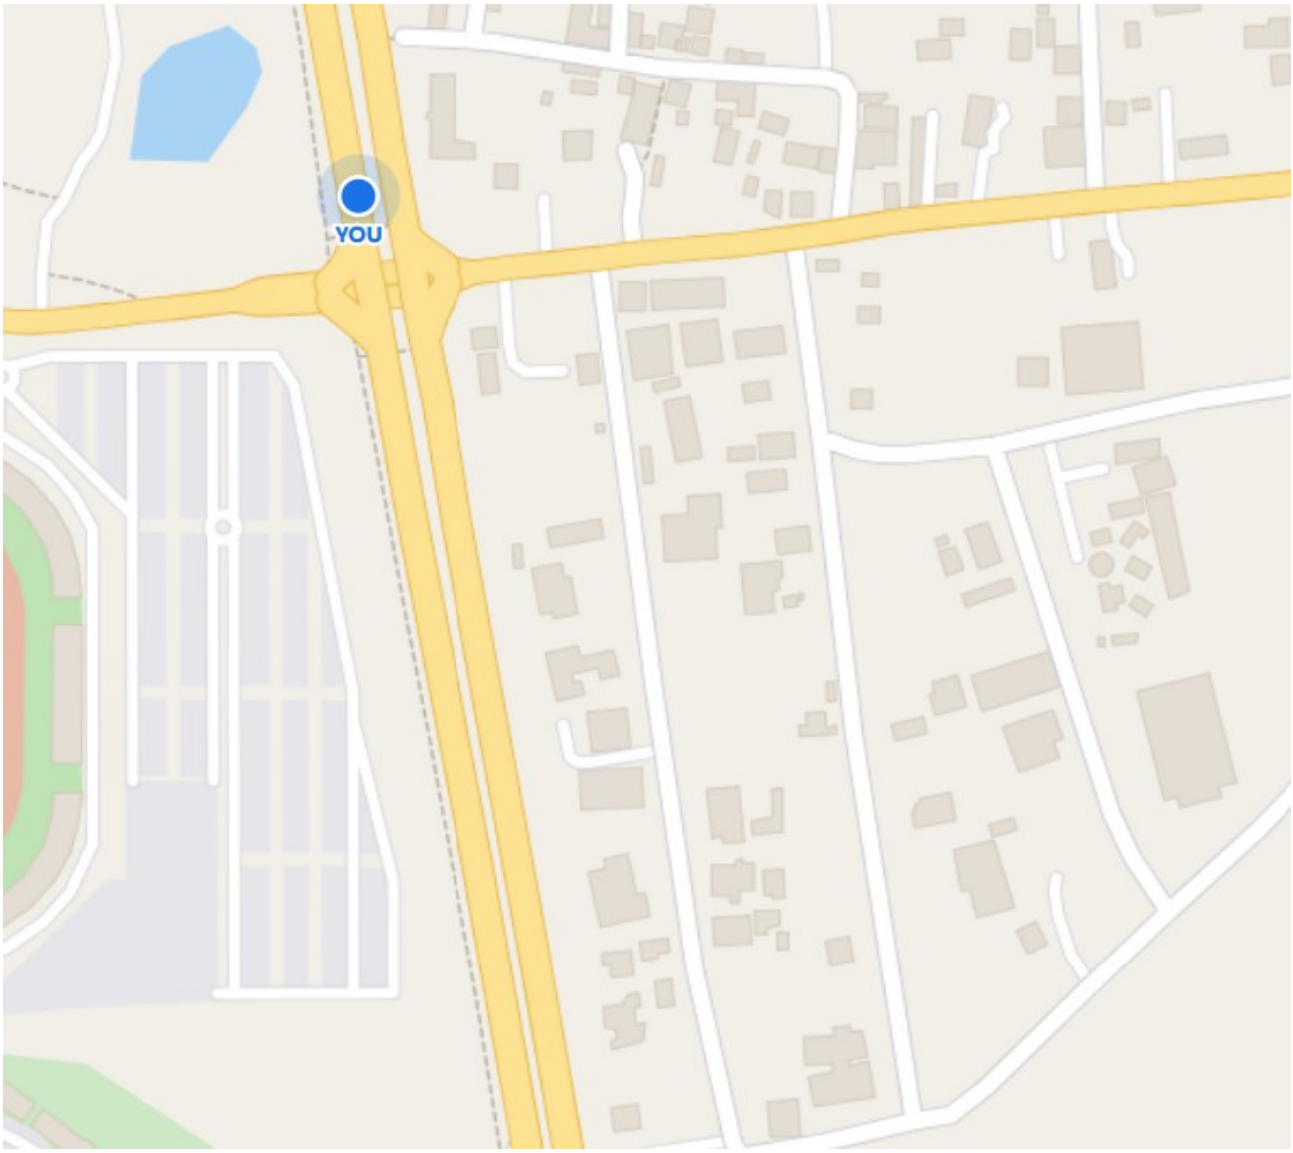

M04 Screenshot 2026-10-13 052244.png

Use this wider view to reconcile the stadium edge, divided-road corridor, La-Bawaleshie Road and McDan Drive relationship. Match the overlapping map crops into one layout and edit the underlying scene objects once per real property.

Claude prompt part 1 Register the references and fix layout

Inspect my existing University of Ghana bicycle game and correct the Okponglo to UG Stadium route using the accompanying 21 game-versus-real pairs, A01–A05 annotated aerial views and M01–M04 game-map screenshots. Implement the corrections in the existing scene. Preserve completed work elsewhere, including Commonwealth Hall and Great Hall. Do not rebuild unrelated campus zones.

Retain the owner's pair numbering, coloured target circles and map arrows exactly. Each game image is left and real image right. Pair 21 uses image(20261013-052130).png as the real target; ignore the duplicate game view originally supplied as its second image. The earlier table PDF was withdrawn and must not determine the pair order. Pair 12's game screenshot is horizontally mirrored; use its real photograph and A04 arrow for world orientation, and do not mirror the game scene.

Find the scene groups, map data, building generators, terrain, vegetation instances, wall generators, materials and collision meshes affecting this corridor. Create a reversible checkpoint. Register road junctions, kerbs, plots and footprint relationships from the aerials against map data. A01 covers 21; A02 covers 1–7; A03 covers 8–11; A04 covers 12–17; A05 covers 18–20. Preserve the owner's directions and distinguish a viewing location from the object viewed across the road.

The game-map images are 2D footprint and road views, not proof of correct 3D geometry. Compare their data records to the aerial footprints and inspect their generated scene objects. A roundabout-like symbol does not establish a real roundabout. Verify the signalised junction from the references before deciding its road shape. Treat Google labels and point markers as investigation anchors, not exact façade or entrance positions.

Reconcile overlapping pairs into single objects: Pairs 5 and 6 are the same plaza; 10 and 11 the same 3D sign shop; 15 and 16 the same Leasafric compound; 18 and 19 the same green Diamed property; 18 and 20 the same blue neighbouring property. Keep distinct adjoining buildings separate. Prioritise footprint, position, orientation, setback, massing, roof profile and ground height before sign graphics or decorative objects. Keep uncertain measurements parameterised.

Claude prompt part 2 Correct vegetation terrain and boundaries

For Pairs 1, 2 and 4, most median trees are too large and have too much exposed trunk. Replace them with compact low-branching plants and short visible stems. Adjust crown diameter, crown starting height, trunk length and branching independently; uniform scaling alone will preserve the wrong silhouette. Keep only the few larger crowns established by the reference. Match plant spacing and gaps through the entire corridor, without creating another tree for each repeated camera angle.

For Pairs 13 and 14, remove the confirmed unsupported large tree row at the marked stretch and restore the open corridor, low shrubs, varied advertising supports, patchy grass and soil. Preserve background or off-median trees. Empty metal billboard frames must remain empty; do not fill every frame with a generic advertisement. Use the captured board shapes and graphics where legible, and do not present old promotional prices as current information.

For Pair 3, restore raised stadium-side ground, a low rough stone retaining edge, roadside sidewalk and dense uneven shrubs over the slope. Replace repetitive tall tree and hedge assets with a varied layered canopy. Match the purple vegetation silhouette as an observation guide, not a literal wavy structural profile. Keep stadium floodlight poles above the vegetation at supported relative positions.

For Pair 21, restore the separate cream and blue roadside structures with their distinct curved profiles, upper panels, recesses and bases. Do not invent their function or replace them with identical generic bus shelters. Model the cream structure’s inset grey board, the stone retaining face, dusty paths, higher stadium-side ground and sign cluster. Keep the local terrain consistent with the stadium perimeter without assuming every stretch has the same section.

Trace real boundary walls, gates and fences rather than leaving open generic lawns. Pair 7 needs a low roofed frontage and metal grille line. Pair 12 needs the long green wall and planted plot. Pair 17 needs cream enclosure walls, metal security fencing, ornate gate and layered low stone and taller green roofed buildings. Use the owner’s horizontal arrow lines for wall direction; they do not specify exact length or become scene objects.

Build terrain, retaining faces, stairs and driveway transitions as geometry. Match pavement slabs, interlocking blocks, gravel, soil, kerbs, wear and exposed drainage independently. Do not smooth every frontage to one level or use a single brown material for stone and soil. Do not delete buildings simply because trees or roofs conceal them; remove objects only where aligned aerial and street evidence establishes a conflicting open, planted or paved area.

Claude prompt part 3 Rebuild the buildings and physical signs

Replace generic façades with the pair-specific forms. Pairs 5–6 need the plaza's orange tiled central vertical feature with blue inset glazing, discrete top windows, recessed middle gallery and ground shop grilles. Pair 8 needs the signed two-level small workshop with its fenced rough forecourt. Pair 9 needs the compact LED shop with a taller central display stack, near-square dark screen, coloured top letters, green recessed entrance and low yellow adjoining wing.

Pairs 10–11 need the 3D SIGN SHOP fascia, differentiated roof and upper-window profile, lower shutters and smaller advertisements. Create the coloured letters individually with shallow relief, outlines and restrained edge shadows. Match their positions and scale on the dark backing. A floating destination label is not a replacement for physical sign geometry.

Pairs 15–16 need the Leasafric red-and-white two-level office and shallow overhanging roof, low red-and-white wall, black vehicle gate, narrow branding pylon, palms, paving and façade advertisements. Create LEASAFRIC GHANA lettering according to the visible physical sign. Keep advertising graphics distinct from raised lettering and preserve blank wall panels.

Pair 17 needs the freestanding Pro Vision Consultants Limited board at the ornate entrance, with layered stone-front and green-gabled buildings behind planted walls. Reproduce confirmed headings and logos; do not invent blurred contact details. Do not treat every signboard as 3D building-name lettering.

Pairs 18–20 need the green Diamed roofed compound and the separate blue neighbour. The green building has a low front roof, taller green gabled mass, balcony recess, decorative green-and-white wall, entrance posts, security detail and patterned driveway. The blue neighbour has a tiled pitched roof, projecting rounded balcony canopy, column and railing, high blue wall and black gate. Remove black commercial bands and retail stripes from these properties.

Match the DIAMED signs and the long visible FIBROID and REHABILITATION banner on the main-road frontage. Preserve separate printed graphics, relief letters, glass, grilles, metal gates, plaster, stone and tile materials. Brown wooden-window instructions from earlier hall projects must not override this corridor's photographed glazed, barred or framed openings. Verify the plaza name and LED letters at source zoom before final transcription; do not guess unreadable letters, phone numbers or hidden floor layouts.

Include visible electricity poles and wire spans, traffic-light supports and lamp heads near the sign shop, street lights, air-conditioning units, fence posts and board bases. Locate them consistently across overlapping views. Do not invent signal timings, underground utility networks, additional bus stops or traffic equipment absent from the references. Treat temporary vehicles, pedestrians, vendors and umbrellas separately from permanent architecture.

Claude prompt part 4 Validate and return comparison screenshots

Implement the five sequential instructions under each pair in the accompanying brief. Resolve shared geometry once, then verify every affected viewpoint. Keep ambiguous object spans adjustable and ask me a location-specific question only where the aerial assignments and photographs cannot establish the target. Continue all clear corrections while recording the uncertainty.

Match the reference camera position, height, direction and field of view before judging proportions. Produce before-and-after screenshots for all 21 pair viewpoints, using A01–A05 arrows as direction anchors. Include close views of the plaza name, 3D SIGN SHOP relief lettering, Leasafric signage, Pro Vision board, Diamed signs, boundary walls, blue balcony canopy and stadium-side curved structures. Hide HUD overlays in diagnostic captures where possible. Do not hide unresolved geometry with large trees or a changed viewpoint.

Also capture an overhead view registered to the aerial maps. It must show one plaza for 5–6, one shop for 10–11, one Leasafric compound for 15–16 and two distinct adjacent properties for 18–20. Verify setbacks and walls around the La-Bawaleshie Road junction and McDan Drive. Show the stadium-side slope, retaining boundary and roadside structures independently from the median planting.

Acceptance checks: median trees mostly have short stems and low compact crowns; the marked open stretch has low shrubs and boards rather than a large tree wall; stadium vegetation follows raised ground; façade massing and roofs match the photographs; physical names and boards occupy their observed surfaces; stone, slabs, gravel and soil have distinct textures; walls, gates and plot returns follow assigned directions; and shared buildings remain coherent across views without duplicates.

Update collisions with the new geometry. Preserve bicycle steering, braking, camera behaviour and ground contact, as well as legitimate road widths, junction passage and driveway access. Prevent cycling through walls and retaining faces. Do not remove real steps, kerbs or drainage solely to simplify movement. Scope changes to this corridor and test that completed campus areas still function.

Return the changed files or scene groups, a concise implementation record, the 21 comparison screenshots and the overhead validation. List unresolved names, measurements or occluded details explicitly. Do not claim surveyed precision or completion of unseen interiors. Keep the game map’s labels, Google UI, arrows, circles and game destination beams out of the physical environment.