Commonwealth west tennis court reconstruction brief

Correct the tennis complex west of Commonwealth Hall in the existing University of Ghana bicycle game. The present scene shows striped grass rectangles on open lawn. The references instead show a fenced blue-green hard court, adjoining red-soil tennis courts and dense surrounding trees, with the playing level cut below parts of the surrounding land.

Main correction

Interpret the owner's rectangular pit as a sunken sports terrace: a level playing surface inside a rectangular retained cut, surrounded by higher ground in the visible sections. Retaining wall heights vary and step along the perimeter. Do not create a uniformly deep open excavation, a raised platform or a grassy depression with sloping playing surfaces.

Reference index

Pictures 1 to 7 are successive video frames of one hard court, not seven different courts. Picture 8 shows the red-soil side with a neighbouring playing area. Pictures 9 to 11 show the current game from three viewpoints. Picture 12 locates the complex in the blue-circled aerial area. Preserve these image numbers; this is a separate reference set, not a continuation of the earlier road pairs.

Naming and limits

The owner calls the court TBC. Picture 12 carries the map label LEGON TENNIS CLUB (LTC). Use Commonwealth west tennis complex as the working scene name until the official name is confirmed. No physical sign reading TBC, LTC or CARLYD GROUP is established by the photographs. Map labels and the blue circle are reference aids only.

Exact pit depth, full perimeter wall profile, access gate, stairs, ramps, drainage outlets and cardinal viewing directions of the video are not established. Keep these adjustable and do not invent detailed access geometry. Match the visible terrace and surfaces now, while retaining any existing access supported by map data. Preserve completed Commonwealth Hall and Great Hall work and bicycle behaviour.

Location and footprint from Picture 12




Picture 12 Owner circled aerial location west of Commonwealth Hall

1. Register the actual tennis footprints inside the circled clearing against the existing map data. The circle is a rough locator; do not use its curved outline as a court boundary or terrain cut.


2. In this aerial, the blue-green hard-court zone lies to the left of the orange-red court zone. Align their long axes, shared adjacency and outer clearing with the image. Picture 8 shows two neighbouring red-soil playing areas; reconcile those with the aerial instead of creating extra courts from video frames.

3. Keep the curving road below the clearing and dense surrounding canopy in their existing registered relationship. Do not rotate or relocate the court to make one screenshot look similar. Confirm local orientation using map coordinates before naming compass-facing elevations.


Current game errors in Pictures 9 to 11

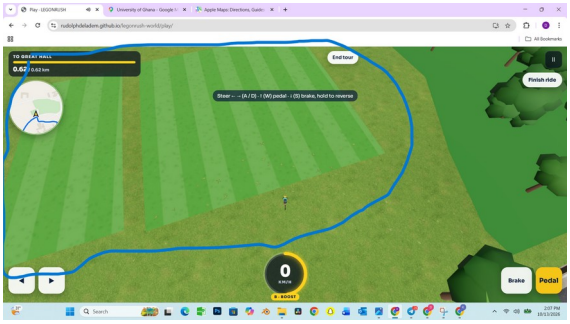

Picture 9 Current game view of the same marked court zone

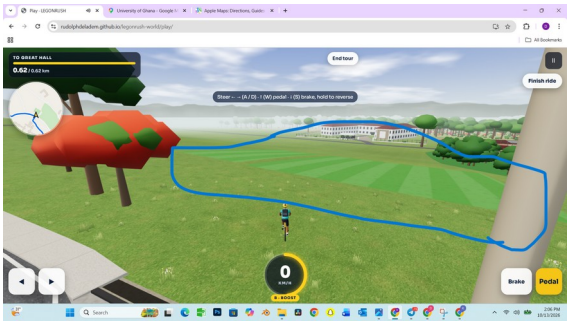

Picture 10 Current game view of the same marked court zone

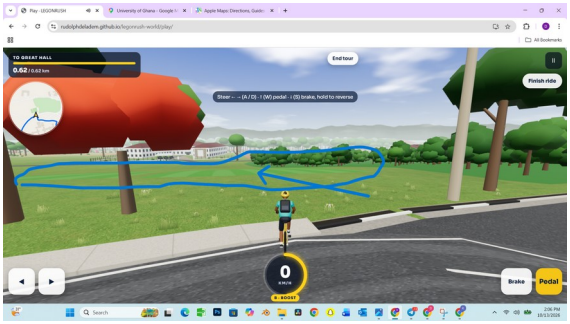

Picture 11 Current game view of the same marked court zone

The game uses two green striped pitch-like rectangles on an open grass field. Tennis lines, contrasting surface zones, nets, fences and retaining walls are not visible. The ground reads as continuous lawn rather than a lowered rectangular terrace. Sparse stylised or orange trees do not recreate the dense mature perimeter canopy.

Replace only the misinterpreted tennis geometry inside the registered complex. Preserve unrelated buildings and roads outside it. The game’s two grass rectangles are not evidence of the real court count. The blue outline and arrow, browser chrome, minimap and HUD must not become scene objects.

Sunken terrace and stepped retaining edges





Picture 1 left | Picture 2 right

Real target

The green court surround meets a retaining face built from irregular tan, grey and reddish stones with mortar joints. Grass and trees stand on higher ground behind it. Along the visible boundary, the wall top and exposed height change in stepped sections. Chain-link fencing and narrow posts rise along the court edge, with diagonal braces at selected posts.

Mistakes to fix

The game has no convincing lower court floor or supporting retained upper ground. A decorative wall placed on the lawn would leave the essential topography wrong. A perfectly uniform high wall around all four sides would also overstate what is visible.

1. Create a local rectangular terrace cut in the existing terrain. Keep the court floor level and set higher surrounding ground outside the visible retained edges. Do not slope the tennis playing plane to follow the hillside.

2. Build the wall faces and cap lines to the changing visible ground profile. Reproduce stepped height changes, especially the higher corner sections and lower side runs, using shared terrain and wall parameters.


3. Use irregular stone texture, mortar joints, modest relief and weathering. Separate this structural wall from the thin metal fence above or beside it. Match wall-to-player and wall-to-fence proportions by camera comparison; do not assign an unsupported exact depth.

4. At unseen perimeter sections, retain conservative adjustable geometry. Do not add a moat, spectator bowl, entrance staircase or ramp to fill gaps in the evidence.

Acceptance: from court level, the stone wall visibly supports higher grass and tree ground. From a drone view, the playing terrace reads as rectangular and lowered, while its surface remains flat.

Hard court colours lines and surface wear



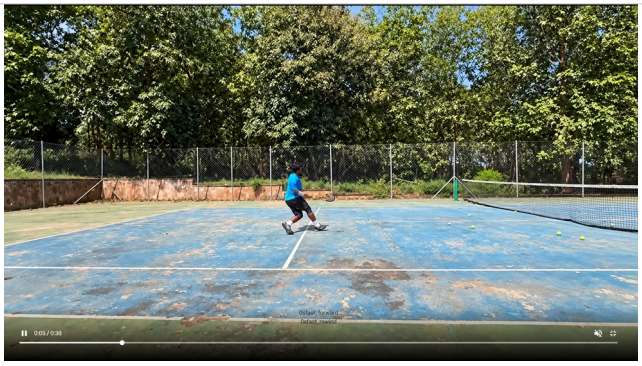

Picture 3 left | Picture 4 right

Real target

The playing rectangle is faded blue with a pale green surrounding run-off area. Thin white tennis lines define the playing layout. The finish is heavily worn: irregular light tan and grey patches, darker scuffed spots and fine cracks interrupt both colours. The playing plane remains broadly flat despite this surface wear.

1. Replace grass stripes with a blue playing area and green run-off surround inside the hard-court footprint. Preserve adequate margins outside the marked lines before the walls and fence; do not shrink the enclosure to the painted line rectangle.

2. Lay out one coherent tennis line system: baselines, sidelines, service lines and centre service line on both sides of the net. Confirm singles and doubles markings from the complete visible frames; do not copy perspective-distorted line angles directly into the top-down mesh.

3. Add non-repeating faded paint, irregular exposed substrate patches and restrained cracks as material detail. Preserve white line readability with mild wear. Surface flakes must not become deep holes, loose rocks or obstacles to bicycle physics.

4. Check colour under neutral daylight as well as the reference sun. Avoid saturated pristine blue, lime-green turf or a uniform brown overlay. The dark canopy shadows belong to lighting, not permanent black paint on the court.

Acceptance: a matched low view shows faded blue play space, green run-off, recognisable tennis lines and irregular wear. A top view has straight, coherent court geometry and a level floor.

Fence structure and mature perimeter planting





Picture 5 left | Picture 6 right

Real target

Tall transparent chain-link mesh runs between thin grey metal posts. Selected posts have diagonal braces. The mesh reveals dense shrubs and tree trunks behind it. Broad mature green canopies form a layered backdrop, with some branches extending above the fence and changing shade across the court.

1. Build an actual perimeter fence group with slim posts, diamond mesh and the observed diagonal bracing. Align it to the enclosure and terrace edges, not to the screenshot circle. Keep wall, fence and ground as separate components.


2. Use transparent mesh material or economical repeated fence geometry. Avoid opaque green panels, huge posts, solid prison walls or a decorative fence floating above the cap. Fit exposed post length to the visible relationship with the retaining wall.

3. Rebuild perimeter vegetation as varied mature crowns, trunk positions, low shrubs and grass on higher ground. Keep dense background layers and overhanging foliage; do not replace them with a uniform row of small stylised trees or orange crowns.

4. Allow trees to conceal parts of distant buildings where the references show that condition. Preserve established building footprints outside the court rather than deleting them solely because foliage hides them. Balance fence and leaf detail against the game performance budget.

Acceptance: the court feels enclosed by transparent fencing and substantial mature greenery. Wall and mesh remain legible through the foliage, and the playing area is free of trunks.

Tennis net and court level details

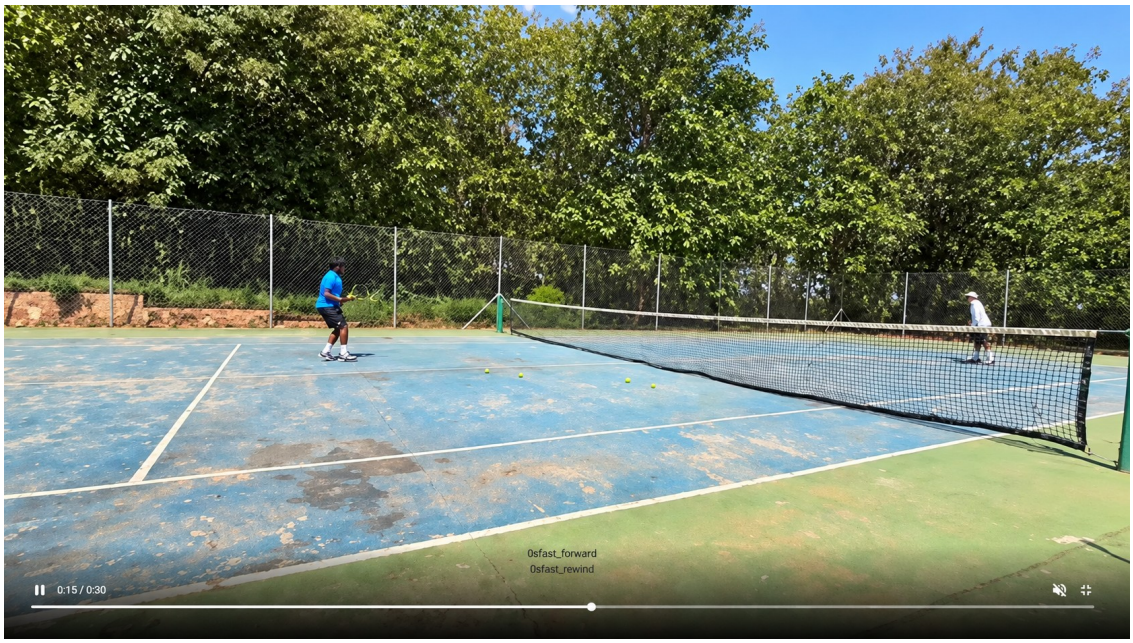

Picture 7 Hard court net and opposite playing half

1. Place one tennis net across the hard court’s centre with green posts, dark fine mesh and a pale top tape. Preserve the gentle centre sag and the observed irregular lower edge without exaggerating it into a collapsed net.

2. Keep the net perpendicular to the long court axis and aligned with the line system. Both playing halves must belong to one court object. The camera moves and players move through Pictures 1 to 7; none of those changes imply additional nets or courts.

3. Represent small surface debris or balls only as optional visual dressing. Do not copy players, rackets, subtitles, video transport bars or fast-forward text into permanent geometry. Preserve a clean floor collision surface beneath visual wear.

4. Use net posts and fencing as physical boundaries appropriate to bicycle exploration. Keep thin mesh visual and use simple colliders where needed; do not modify bicycle steering or create a new tennis gameplay system unless separately requested.

Acceptance: two recognisable tennis halves are separated by one properly placed net with green posts. The mesh remains transparent, and the net never floats above the court or cuts through the walls.

Red soil tennis zone in Picture 8



Picture 8 Adjoining red-soil playing areas and shared enclosure

Real target

Orange-red granular ground carries pale tennis lines and visible sweep or foot marks. Two neighbouring playing areas and separate nets are visible. The surface differs fundamentally from the blue-green hard court. Dense trees and vines screen the fence; retaining edges and braced supports appear around the perimeter. A tall slender metal assembly and an elevated chair-like frame stand near the left edge; their complete functions are not established.

1. Register this zone beside the hard court using Picture 12. Preserve the two visible red-soil playing areas and their separation. Do not recolour the whole complex red or turn the hard court into a third red-soil duplicate.

2. Use matte red-orange earth or clay-like material with fine grain, subtle uneven colour, sweep marks and pale line markings. Keep playing surfaces level and collision simple; visible soil texture is not permission for deep ruts.

3. Build the separate nets and posts, perimeter fencing and retaining edges to the observed arrangement. Reuse the surrounding tree belt rather than duplicating a separate forest for each court. Do not assume all red-soil boundaries have the hard court's exact exposed wall height.

4. Reproduce only the visible slender metal support assembly and chair-like frame conservatively. Do not invent floodlight heads, electrical wires, a scoreboard, seating stands or service buildings whose details are not visible.

Acceptance: the aerial and court-level views show the hard surface and red-soil zone side by side, with distinct materials, plausible run-off space, correct nets and a coherent enclosing landscape.

Implementation sequence and uncertainty controls

1. Inspect existing scene objects and map features for the circled site. Identify the grass-pitch meshes, their coordinates, extents and generator source. Reuse the project's coordinate frame and local terrain system; do not replace the whole campus.

2. Register the compound footprint and court adjacency from Picture 12. Remove the mistaken grass-pitch materials and any field-specific markings inside the confirmed tennis area. Do not delete neighbouring buildings, roads or trees without reference support.

3. Build a shared lowered terrain terrace and retaining system. Expose parameters for floor elevation, upper perimeter levels, wall profile, court extents, run-off margins and surface-zone placement. Use the photos to adjust proportions after matching viewpoints.

4. Add the hard court, red-soil playing areas, lines, nets and transparent fencing. Keep wall courses, surface wear and soil texture independent from physics geometry.

5. Restore perimeter mature trees, dense shrubs, upper grass and observed support frames. Match the enclosure first, then detail. Aerial vegetation is not a precise inventory of every hidden trunk.

6. Check existing access features in map data and the scene. The images do not establish a precise entrance gate, stairs or ramp. Do not cut an arbitrary new bicycle ramp through the retaining wall. If access design is essential and unsupported, ask the owner for an entrance reference while completing the supported site corrections.

Evidence limits

Aerial registration establishes location and adjacency, not a measured vertical survey. The player in video frames provides a rough visual scale check but no exact dimensions. The seven frames mostly show overlapping portions of the same hard court; they do not reveal the complete perimeter, all gates or drainage. Enhanced screenshots may make textures look sharper than the original scene, so prioritise consistent features visible across multiple frames.

Acceptance checks and requested comparison captures

1. Location and count: the complex occupies the blue-circled clearing west of Commonwealth Hall. Its blue-green court and red-soil zone are adjacent and aligned with the aerial. No court is duplicated from successive video frames.

2. Topography: a drone view shows a lowered rectangular terrace with higher surrounding ground at supported edges. A low court-level view shows stepped irregular stone retaining faces. The court floor is flat and no wall floats above or sinks inconsistently into the terrain.

3. Surfaces: the hard court has faded blue play space, green run-off and readable white tennis lines. Red-soil courts have matte orange-red ground and pale lines. Both show restrained material wear without physics potholes.

4. Enclosure: thin grey chain-link posts and selected braces align to the compound. Nets have green posts, dark mesh and pale top tape. Dense mature foliage and shrubs screen the background without invading the playing footprint.

5. Access and movement: existing bicycle controls and nearby roads remain intact. Retaining walls, posts and nets have sensible colliders; no player falls through a cut in terrain. Preserve established access; report gate or stair uncertainty rather than presenting invented geometry as real.

6. Preservation: Commonwealth Hall, Great Hall and other completed zones remain unchanged outside the local adjustment boundary. No map pin, blue circle, screen text or video interface is reproduced physically.

Return a registered top view comparable to Picture 12, the three game viewpoints of Pictures 9 to 11, at least two court-level views comparable to Pictures 1 and 7, and a red-soil view comparable to Picture 8. Provide a brief change list and any unresolved placement or access questions. Do not judge success solely from a distant aerial capture.

Consolidated Claude prompt Part 1 Placement and terrain

Correct the existing University of Ghana bicycle exploration game's tennis complex west of Commonwealth Hall. Use the attached brief and all 12 reference images. Pictures 1 to 7 are overlapping video frames of the same hard court; 8 is the red-soil zone; 9 to 11 are three current game views; 12 is the owner-circled real aerial location. Implement changes in the existing game and preserve completed Commonwealth Hall, Great Hall and all unrelated scene work.

The current striped grass rectangles are a misinterpretation of tennis facilities. Inspect their scene IDs, map feature IDs, coordinates and generation logic. Register the actual clearing, court footprints, adjacent red-soil zone, curving road and surrounding tree belt against Picture 12. Use the aerial for layout and the photos for local ground levels, materials and fence construction. Do not treat the blue circle as an exact boundary or create it as geometry.

The key terrain correction is a sunken rectangular sports terrace. The level playing floor sits below parts of the surrounding land, with irregular stone retaining faces and changing stepped exposed heights. Model the lowered floor, supported higher outside ground, wall faces and cap profile together. Do not leave the court on a flat lawn with decorative walls, place it on a raised slab, make the playing plane slope with the hill, or dig a uniform deep moat.

Keep court-floor elevation, upper perimeter heights, enclosure dimensions, wall profile, run-off margins and zone placement adjustable. Match court-level camera height, heading and field of view before judging depth and scale. Do not invent precise measurements or cardinal headings for the video. Preserve local terrain continuity with the road and nearby completed buildings.

The owner calls the court TBC and the aerial carries LEGON TENNIS CLUB (LTC). Use Commonwealth west tennis complex as a working object group name until naming is confirmed. Do not add a physical TBC, LTC or CARLYD GROUP sign from map labels. No entrance gate, stair, ramp or drainage outlet is fully established by these images; preserve supported existing access and request a specific entrance reference if required rather than inventing one.

Consolidated Claude prompt Part 2 Court surfaces and enclosure

Rebuild the blue-green hard court in its registered footprint. Use a faded blue playing rectangle and pale green run-off surround, with coherent white tennis markings and generous margins before the enclosure. Add irregular tan and grey exposed-substrate patches, darker scuffs and fine cracks as material detail. Avoid football-like grass stripes, pristine saturated paint, deep holes or raised flakes that alter movement physics.

Place one net across the centre of the hard court with green posts, dark fine mesh, pale top tape and modest sag. Confirm the line layout from the combined frames and keep the mesh perpendicular to the court axis. The seven frames must never become seven courts. Moving players, balls, rackets, video controls and text are not permanent site objects; scattered balls or debris are optional later dressing.

Rebuild the neighbouring red-soil zone separately. Picture 8 shows two adjacent red-soil playing areas and separate nets; reconcile them with Picture 12. Keep red-orange granular earth distinct from the hard court, with pale lines, subtle sweep marks and restrained surface variation. Keep these playing floors level. Do not recolour the whole complex or duplicate courts to fill the aerial clearing.

Build thin grey chain-link posts, transparent diamond mesh and selected diagonal braces along the actual enclosure. Keep retaining wall and fence structurally separate, with their bases following the supported ground relationships. Use irregular natural stone colours and mortar on the retaining faces, including stepped cap heights and weathering. Do not substitute a uniform brown painted wall, opaque panels or oversized posts.

Restore the dense mature green tree belt and shrubs visible behind the fence, with varied trunks, broad crowns and overhanging foliage. Keep higher grass behind the wall. Replace unsupported orange or stylised tree forms in the local scene, while retaining confirmed nearby structures hidden by trees. Occlusion is not proof of a building’s absence. Use conservative geometry for the metal support assembly and elevated chair-like frame seen at the red-soil edge; do not invent lighting heads, wires, spectator stands or service buildings.

Consolidated Claude prompt Part 3 Verification and completion

Implement the brief’s sequence in this order: registered footprint and adjacency; lowered terrain and retaining walls; level hard and red-soil surfaces; markings and nets; fencing; dense perimeter planting; material wear and small visible equipment. Remove only the mistaken grass-pitch geometry and reference-confirmed conflicts inside the tennis correction boundary. Avoid changing surrounding roads or completed campus architecture.

Use simple coherent colliders for terrain, walls, posts, nets and gates. Preserve bicycle steering, braking, movement, camera behaviour and nearby exploration routes. Do not add a new tennis gameplay system or a large player-access ramp unless separately authorised. Surface cracks and chipped paint must remain visual details rather than invisible collision obstacles.

Render a drone top view registered to Picture 12; reproduce the three game viewpoints of 9 to 11; capture court-level views corresponding to 1 and 7; and provide a red-soil view corresponding to 8. The lower court floor, changing retaining heights, hard-versus-earth surfaces, transparent fencing, real nets and dense mature planting must be visible. A distant aerial view alone is not sufficient acceptance.

Check that one coherent site produces every view, without duplicate court groups, conflicting terrain masks, floating walls or fence bases. Check lighting under reference-like daylight, so tree shadows do not become permanent dark paint. Keep fence and foliage detail performant and verify the terrain cut does not let the bicycle fall through.

Return a concise list of changed object IDs or groups, map-data or generator fixes, comparison screenshots and unresolved parameters. Flag uncertain entrance, gate, stair and drainage details explicitly. If the registered location or an essential access feature remains unclear, ask a direct specific question while completing all corrections supported by the existing references. Do not claim exact real measurements from this set.