James Topp Nelson Yankah Hall

Detailed evidence, numbered annotations and strict instructions for Claude. Reconstruct the hall and its immediate surroundings from the supplied real-world photographs, three videos and two top-view maps.



Scope and evidence

23 photographs reviewed; 18 selected for the reference appendix. Three videos reviewed; 21 clear and complementary snapshots selected in timestamp order within each clip. Both supplied maps are included and compared.

The full name above follows the visible hall signage and map label. The ZIP uses the folder name TF HOSTEL REAL WORLD IMAGES; this is retained as source provenance, not used to rename the hall.

Evidence limit: the game attachment is a flat map. It supports footprint and placement comparisons; existing 3D heights, roofs, materials and collisions must be inspected in the game. No exact surveyed dimensions or hidden elevations are claimed.

Prepared for the LEGONRUSH project. Numbered map locations are document IDs, not official block numbers. Video timestamps refer to uploaded files, not the on-screen YouTube timeline.

COMPULSORY DETAIL-INSPECTION CLAUSE / PAGES 43-45
Claude must read and apply all three pages before modeling. Original-resolution close-ups, a floor-by-floor placement ledger and a matched-angle audit are required. No invented pillars, windows, doors or wall divisions.

01 / How to use this brief

Source hierarchy. M1 real satellite map establishes plan relationships. R01-R23 are photographs in numeric filename order. V1/V2/V3 snapshots establish facade depth, ground surfaces and interior courtyard relationships. M2 is the supplied game map.

Chronology. Video 1 is 65.50 seconds, Video 2 is 12.00 seconds and Video 3 is 17.13 seconds. Frames are ordered within their own clip; capture dates and cross-video chronology are unknown.

Selection. Landscape clips were sampled at regular intervals and portrait Video 3 at one-second intervals. The final set favors unobstructed architecture, distinct views and legible surface detail. Some snapshots retain playback bars, subtitles and watermarks; none of these belong in the game.

Confidence. White walls, orange pitched roofs, four occupied levels in clear elevations, gallery recesses, brown louvres, perforated stair bays, fencing, palms and the court are directly visible. Exact heights, floor-to-floor spacing and identification of every small roof are provisional.

Working rule. Register maps first; correct massing and open spaces; then facade and roof details; finally ground materials, vegetation, labels and bicycle collisions. Do not use decorative detail to conceal an incorrect site plan.

Navigation: annotated maps and evidence plates precede the implementation specifications; the consolidated Claude prompt precedes the chronological snapshot and selected photograph appendices.


02 / Real-world location key



01 / 02 upper map-left / map-right long wings; **03 / 04** lower map-left / map-right long wings; **05** middle cross-site connection/gap; **06** basketball courtyard; **07** upper lawn courtyard; **08 / 09** bottom short-roof blocks; **10** road and frontage; **11** upper yard/roof cluster; **12** outer field and boundary context.

The map has no reliable supplied north reference. These are map-relative locations, not cardinal directions. Connectors, end blocks and roof overlaps need elevation cross-checks; no official room/block names are assigned. Upper small roofs and bottom blocks are clearly present but their uses and exact heights are unconfirmed.

03 / Game map comparison

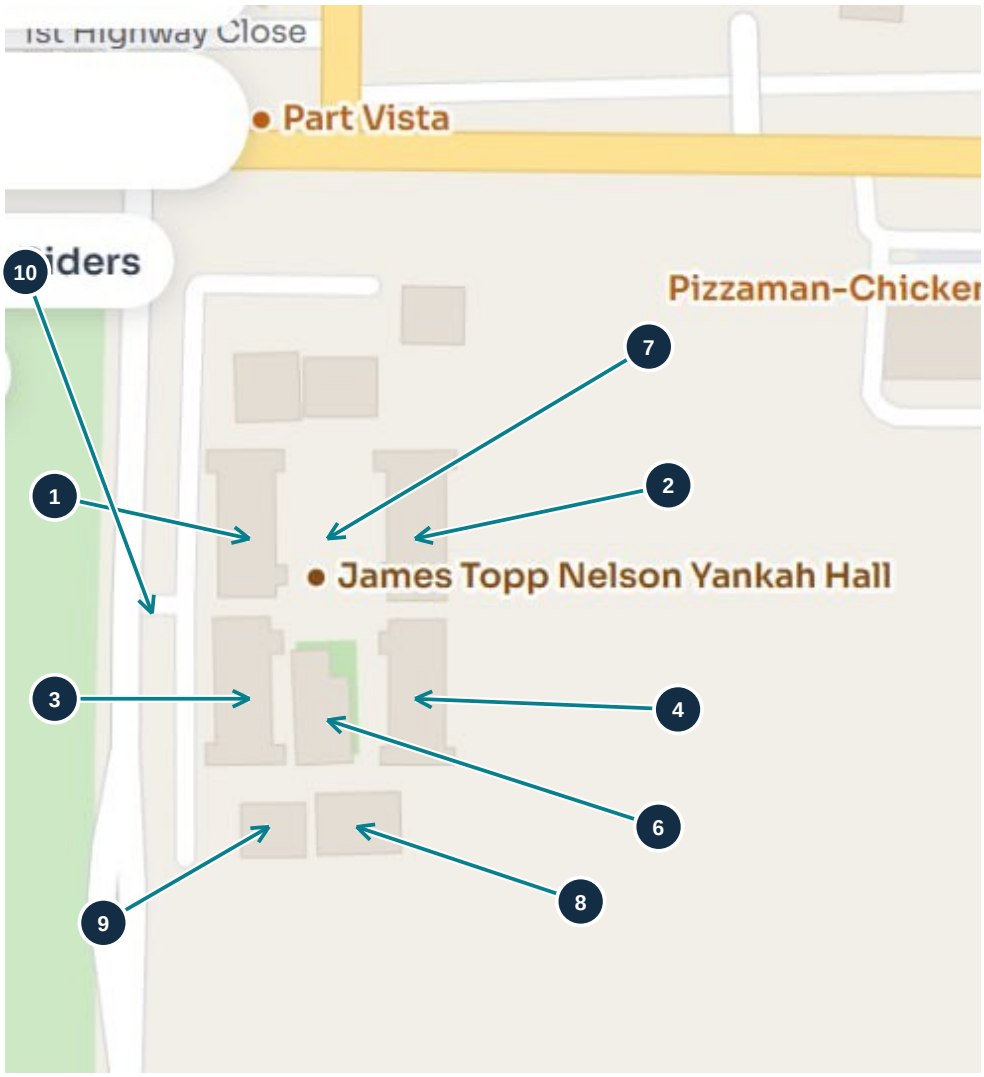

The game map already shows four elongated wing footprints, an upper small-block group and two bottom blocks. These are useful anchors. The central green/cream lower-court region requires registration against the real basketball court; its visible outline and fill do not establish a finished sports surface.

Visible issue to resolve: real satellite roofs and yard edges are more irregular than the simplified map polygons. Trace actual wing widths, middle offsets, end projections, roof overhangs and open courtyard boundaries before editing local detail.

Do not infer: beige map fill is not real wall or roof colour; the map cannot establish whether existing galleries, stair bays, fence or court geometry are modeled. Audit these in the rendered scene.

04 / Registration and block schedule

Register 10, then 06. Match the vertical road, upper road intersection, four long wing axes, lower court centre and two bottom small blocks. Solve one scale/rotation/translation; confirm the two maps are not mirrored.

01-04: primary wings. Keep four map-relative long roof sections and both courtyard voids. Ground images show connected elevations with stair/entry bays; these segments must be reconciled rather than treated as four unrelated identical boxes.

05: middle connection. Satellite shows a cross-site strip between the two courtyard zones and roof/stair changes at adjacent wing ends. Establish whether each part is ground paving, covered connection or building volume from the local scene and reference matches. Never fill the entire strip with a tall wall.

06: sports court. Model one elongated fenced basketball court, blue painted playable surface, clear lines, hoops at opposite ends and narrow perimeter grass/paving. Preserve clear space between court fence and hall walls.

07: lawn court. Retain lawn, palms, smaller trees and circulation routes. R16/R20 and V1-13/V3 views corroborate the interior landscape; exact individual tree positions require camera matching.

08/09/11: small roofs. Trace each visible footprint and roof separately, including minor structures in the upper yard. Satellite establishes roof plan but not storeys. Use low provisional massing only where warranted; flag height as unresolved.

12: environs. Keep the wooded side of the road and open field side distinct. Include adjoining roadside pavement, verge, utilities and boundary edges; avoid expanding the hall across those spaces.

05 / Road frontage and identity

R11 / street-side entrance. This plate identifies appearance; confirm its exact map-relative facade before assigning it to a wing.



1. Terracotta pitched roof with visible overhang and dark fascia. Keep roof relief and warm tile texture.

2. Arched projecting portico with tall white piers; blue sign and hall lettering. This is a specific facade landmark, not a generic flat door.

3. Recessed open gallery bands, dark inner windows and repeated white piers. At ground level the enclosure differs from the open upper galleries.

4. Low white wall, white square posts, brown rectilinear metal infill and coiled wire above. Simplify wire at distance while retaining its silhouette.

5. Narrow purple groundcover bed with soil and paver edge. Do not replace the entire frontage with plain lawn.

ANNOTATED EVIDENCE PLATE

06 / Stair bay and inner entrance

R19 gives a strong facade reference. Four levels are visible; exact structural heights remain estimates. Dark tanks and local AC units are secondary details.



1. Hipped tile roof caps a projecting stair/end pier. Neighboring long roof planes meet with a visible break.

2. Small brown louvre windows interrupt near-blank white piers; these differ from the horizontal open galleries.

3. White perforated ventilation blocks screen the central stair bay. Keep the patterned openings and visible diagonal stair/profile where supported.


4. Small tiled gable canopy above a recessed inner doorway, distinct from the arched roadside portico.

5. Tan block-paved approach with raised side edge. Grass and shrubs are separate from the walkway.

6. Basketball fence with inward/angled upper posts and nearby blue hoop structure. Preserve the narrow route beside it.

07 / Basketball courtyard

V2-01 / 00:02.0. Selected before foreground people obscure the view. R02 shows a brighter repaint; this clip shows a more muted finish.

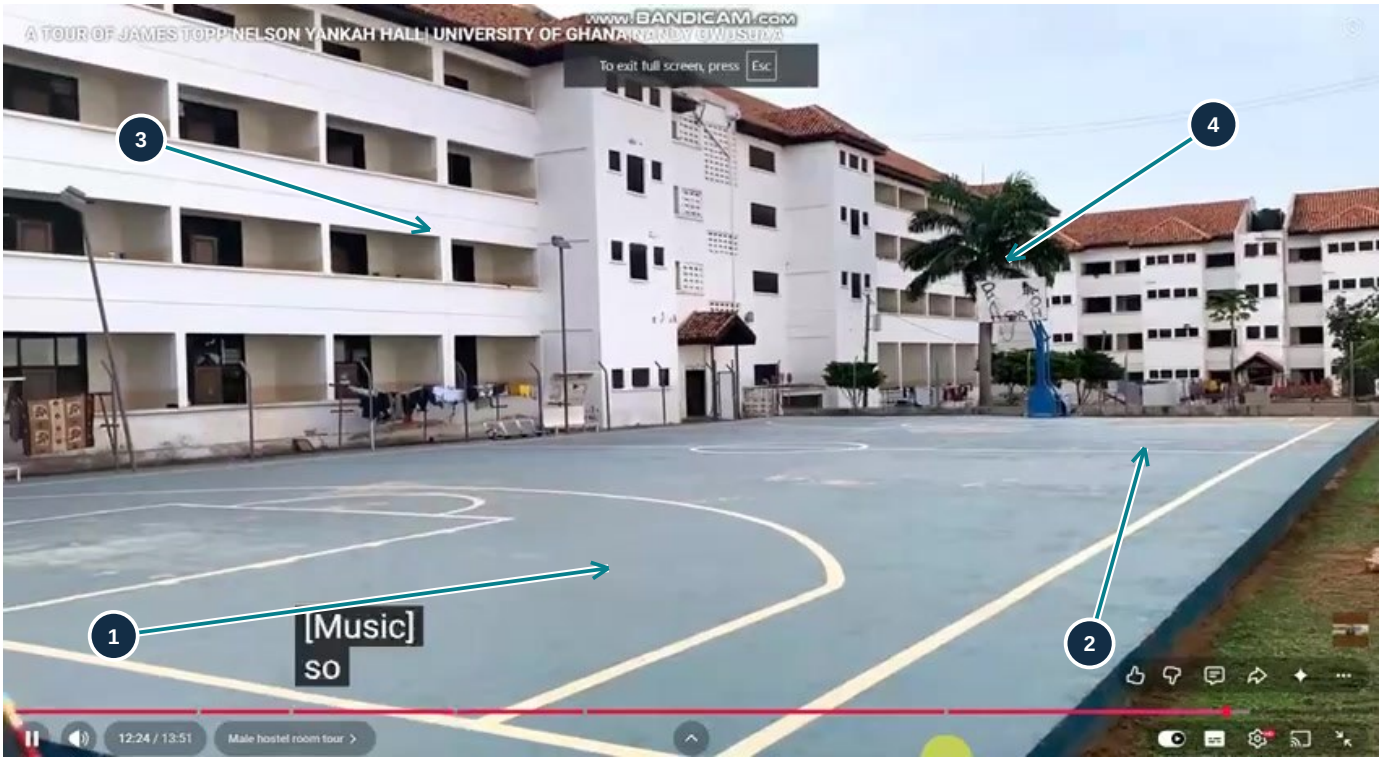

1. Blue/blue-grey court with white boundary, centre-circle and key/arc linework. Draw markings on the court, not on grass or the walkway.

2. Blue perimeter upstand and narrow green/brown verge outside the playing surface.

3. Long white gallery-facing wing, terra-cotta roof and projecting stair volume. Court scale must be checked against the building.

4. Opposite and far wings frame the court. Maintain the open sky and clear courtyard width.

08 / Fence, palms and paving

R23 / clear road-level material reference. Do not place palms in the centre of the walk or make the planting strip fully obstruct pedestrian circulation.



1. White wall/posts, warm brown metal fence and white gallery facade behind. Retain depth between boundary and building.


2. Palm-lined verge, grass around roots and slender roadside lighting/utility elements. White-painted trunk bases occur in several frontage views.

3. Tan/brown herringbone interlocking pavement. It is distinct from asphalt and from a smooth beige concrete slab.

4. Dark asphalt road with pale edge marking; across-road low structure is context, not evidence of an additional hall block.

09 / Inner landscape and paths

V1-13 / 01:03.0. View establishes courtyard openness; it does not provide a surveyed position for every plant.

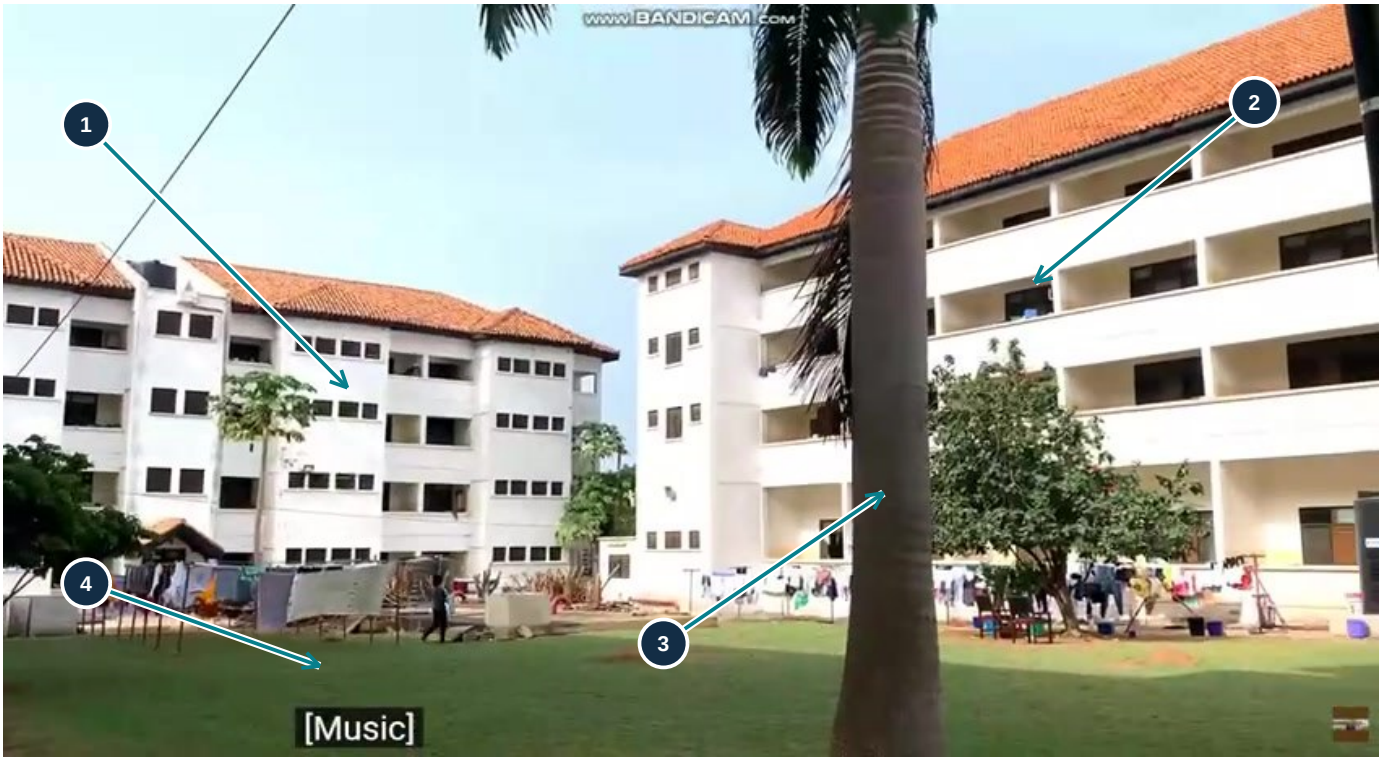

1. Opposing white block with dark rectangular window groups; elevations vary between open gallery and enclosed windowed faces.

2. Long recessed gallery wing with projecting pier and warm pitched roof. Do not apply one window strip everywhere.

3. Tall palm stands in the lawn, not on the building roof or court surface.

4. Lawn courtyard and low vegetation; preserve routes and small ground-level fixtures while avoiding clutter from temporary laundry.

10 / Massing and height rules

Occupied tiers. R07/R11/R19 and Videos 1/2 show a ground level plus three upper levels on the clearest main elevations. Use four levels as the observed main-wing model, with a pitched roof above. Do not count the roof void as a fifth storey.

Relative proportions. The long wings dominate; stair/entry piers project modestly and roofs have shallow-to-moderate slopes. Courtyards span several window bays and remain wider than narrow frontage paths. Match ratios using multiple photos, not one foreshortened view.

Estimation method. Count repeated facade bays, establish a consistent tentative bay/floor module, and calibrate to mapped footprint length once project map scale is known. Human/car sizes are secondary checks; no exact metre values are supplied here.

Compound volumes. Build main slabs, piers, central stair bays, arched portico and smaller inner entry canopies as separate components. Roof ridges and end hips must follow each component, with actual gaps and returns.

Unseen faces. Repeat only architectural patterns supported by adjacent wings and views. Hidden sides and small-block height stay provisional; label assumptions in implementation notes.

Acceptance. Overhead silhouette matches M1; ground view shows four levels, roof overhang, real gallery depth and clear courtyard voids. No solid slab occupies the court or lawn.

11 / Facades, galleries and windows

Gallery depth. Upper galleries have deep shadowed recesses behind solid white horizontal parapets and repeated vertical piers. Model usable depth or a convincing recess, not dark rectangles painted on a flat wall.

Ground enclosure. Road-facing ground bays show brown vertical louvre/bar screens; other areas have doors, dark windows or gates. Keep these elevation-specific rather than repeating open balconies down to pavement.

Louvres and shutters. Use dark brown/near-charcoal slatted panels with visible frame divisions. Interior shadows are darker than exterior white paint. Some windows are partially open; modest variation is sufficient.

Stair bays. Near-blank projecting piers carry grouped small windows. Central patterned white ventilation screens and a local diagonal stair edge are distinctive identifiers. Use patterned mesh/texture at distance, depth/holes in close views.

Portico. Recreate the white arched lintel and tall supporting piers on the signed roadside entrance. It projects in front of the facade and sits inside the boundary.

Small entrance canopy. The inner stair entry uses a small brown/terracotta gabled cover, a dark doorway, light side walls and paved approach. Do not substitute the arched portico here.

Secondary detail. Place a few observed AC units, downpipes, wiring, water tanks and service fixtures locally. Avoid perfectly uniform repetition, excessive grime or unrelated ornamental trim.

12 / Roof construction and small blocks

Main roofs. Warm red-orange/terracotta tiles, long ridges, visible hips at selected ends and capped projecting piers. Eaves cast narrow dark shadows; fascia/undersides are darker than the wall.

Geometry priority. Trace roof section lengths and breaks from M1, then use R19 and roadside photos to distinguish hips, gables, overhangs and stair gaps. A single flat roof or one giant pyramid is unacceptable.

Tile relief. Use a shared tiled material with roughness/normal variation. Keep silhouette geometry for ridges and eaves; fine individual tiles need not all be meshes.

Roof fixtures. R19 shows a dark tank in a stair/roof gap and a ground-side tank. R11 shows a mast behind the facade. Position only where cross-view matching supports them; a background mast is not proof of a fixture on every block.

Bottom blocks 08/09. Two separate small orange roof masses appear in M1 and game map. Preserve their separation and ground access. Their use and storeys are unconfirmed; do not fabricate lecture-hall or administrative labels.

Upper cluster 11. Retain roofed pieces, paving/yard and trees visible above the primary wings. Map labels may indicate businesses but do not prove full building identity or height.

Acceptance. Top view retains every confidently visible roof patch and gap; eye-level view retains long shallow pitched roofs and small canopies as distinct scales.

13 / Materials and coherent colour

Wall palette. Off-white/light warm grey plaster, subtle dirt and weathering at lower edges. R19 appears cream under direct sun; R11 appears cooler. Choose neutral daylight calibration and preserve restrained variation.

Roof palette. Terracotta red-orange with dull brown shaded areas. Photograph exposure and roof ageing change apparent saturation; avoid bright scarlet or uniform smooth orange.

Openings. Dark brown slatted timber-like panels, charcoal interior shadows, dark metal frames. Open galleries remain readable as depth, not opaque black ribbon glass.

Metal and boundary. Warm reddish-brown geometric fence, white masonry wall/posts, grey/silver wire, darker court mesh/posts and blue sports supports.

Ground palette. Tan/brown interlocking pavers, dark grey road asphalt, green lawn with dry patches, purple planting beds, red-brown bare soil and blue court surfacing. Each gets its own region/material.

Court date difference. R02 is brighter blue and greener around the edge; V2 and R14 show a more muted/worn blue-grey court. Select one documented state consistently. Do not create a second court just to accommodate repaint differences.

No false precision. These images are uncalibrated. Sample provisional colours from neutral-lit references and verify visually; do not report guessed RGB values as measured building paint.

14 / Court geometry and enclosure

Location and extent. Keep the single court within lower courtyard 06, aligned to M1 and framed by the wing faces. Its long rectangle must fit the actual open space without pushing buildings outward.

Markings. Use R02/R14 and V2-01 for white perimeter, halfway line, centre circle, keys/free-throw areas and arcs. Project clean lines onto the court with enough offset to avoid flicker.

Hoops. Two opposite-end hoops with blue metal support assemblies, rectangular backboards and rims. Use source geometry for the bent/support profile; the court must not have random extra hoops.

Fence. Fine chain-link panels and repeated slender posts, with angled top sections where visible. Use transparent/alpha-tested mesh texture; retain physical post geometry close to the bicycle.

Edges. Blue court plinth/upstand, narrow grassy or worn earth edge and adjacent paved routes. Maintain the level difference and side drainage/raised edge visible in R19/V1-10.

Collision. Provide a simple continuous court collider, separate fence/hoop collisions and an accessible route/gate where verified. Mesh texture holes do not require thousands of tiny collision shapes.

Props. Temporary laundry and people establish scale but are optional atmosphere. They must not block the route or be mistaken for permanent architecture.

15 / Grass, trees, bushes and flowers

Interior lawn. Short green-to-dry grass in the open court with compact broadleaf trees, palms and paths. V3 is dimmer/browner; R16/R20 are greener. Choose a consistent season and retain patch variation.

Frontage planting. Palm row along the boundary, white-painted bases visible in repeated street views, small flower beds and purple low groundcover. Keep root pits and planting strips separate from pavers.

Tree shape. Palms have tall narrow trunks and arching fronds; inner broadleaf trees have low dense crowns. Use different assets and scales. Avoid conifers or identical spherical trees.

Shrubs. Small rounded bushes near inner approach R19, low planted bands outside fence R11/R17 and scattered bed borders. Keep bushes below the facade windows except where a reference shows otherwise.

Efficiency. Use shared foliage materials and instanced palms/trees; continuous bushes can be low-poly masses with leaf textures. Preserve close silhouette depth and avoid flat horizontal green cards at bicycle distance.

Environs. Dense woodland across the road differs from the open field on the other side. Far canopy can be simplified in chunks; do not scatter trees over the court, parking or mapped roofs.

Acceptance. The lawn remains open and legible, purple beds remain low, palm trunks align with the verge, and no foliage blocks the hall sign or passage.

16 / Paving, parking and road context

Walk surface. R23 and V1 frontage show tan interlocking pavers with herringbone/zigzag pattern. Map actual walkway strips; use scale-correct joints and roughness rather than a featureless beige material.

Court approach. R19 shows a straight paved approach to the small canopy, raised side edge and lawn beside it. Keep its relation to the court fence; avoid turning it into a driveway.

Parking. V1-05 to V1-09 show vehicles on an inside paved/apron area along the wing. Preserve access openings through the roadside boundary. Exact bay stripes are not consistently visible; do not invent a dense parking grid.

Road. Retain dark asphalt, pale edge markings where observed, curb/verge and connection to the upper cross-road. Roads must sit beside the building plots, with smooth rideable transitions.

Campus gate context. M1 has a UG Electronic Gate pin near the lower road and a cross-road roof/bar-like structure. V1 also shows a distant roofed gate approach. Treat this as context to register, not proof that it is the hall entrance.

Utilities. Place slender streetlights, overhead line/pole context and limited bins only where visible. Keep transient posters, video overlays and screen UI out of the reconstruction.

Adjacent structures. Include identifiable small roof silhouettes and nearest roadside context if within scene scope; do not assign hall ownership or business signage solely from an offset map pin.

17 / Signage and 3D labels

Exact primary name. Use JAMES TOPP NELSON YANKAH HALL, matching visible signs. Preserve the full name and double P in TOPP. TF HOSTEL is secondary wording found in source context, not a replacement for the primary identity.

Physical sign. Roadside facade has hall letters above a blue rectangular panel; V1-08 has a red-bordered/alternate panel. Choose the panel appearance matching the selected source state and scale it to the portico.

Do not invent numbering. 01-12 in this PDF are navigation IDs only. Do not put Block 01, Block 02 or invented academic department names on the physical buildings.

Game labels. Anchor a single main hall 3D label to the correct precinct/entrance. If debug labels are useful, name objects descriptively: upper-left wing, lower-right wing, basketball court. Keep debug labels separate from public signage.

Readability. Use a modest backing/contrast at game-label scale; apply distance fade or occlusion handling. Physical letters stay on the facade and should not float above every roof.

Telephone/business text. Small phone numbers and commercial map pins are not needed for architectural recognition. Do not copy uncertain small text or turn every pin into a building sign.

Acceptance. Primary label is spelled correctly, positioned over the matched site and readable without obscuring roof shape or the court.

18 / Implementation and performance

Audit first. Locate hall meshes, map polygons, procedural generators, transforms, material instances, colliders and object naming. Save overhead and road-level baselines before changing geometry.

Edit at the source. If buildings are generated from map data, fix footprint/height/roof/facade parameters rather than adding an overlapping duplicate scene layer. Retain stable IDs and game integration.

Modular construction. Share floor/gallery modules, louvre textures, fence panels, roof materials and vegetation assets. Vary elevations using a per-wing schedule, not a single generic facade on every side.

Geometry budget. Spend geometry on portico arch, roof hips, deep galleries, stair piers, canopies and sports frames. Use textures/instancing for fine louvres, tile ridges, wire coils, small plants and distant foliage.

Scene seams. Join paving/road/lawn boundaries without cracks, floating kerbs or z-fighting. Keep terrain and riding collisions continuous; roof and facade details should not create invisible ground barriers.

Limit scope. Reconstruct this hall precinct and mapped immediate environs in its own change set. Do not alter Evandy, Bani or unrelated halls to force a visual match.

Measure. Compare before/after draw calls, frame time and mesh counts on the same route. Optimise repeated small details while retaining distinctive silhouettes and courtyard openness.

19 / Required validation views

A / overhead. Match M1 orientation and crop: four long wing sections, upper lawn court, lower basketball court, bottom twin roof blocks, upper yard and road alignment. Overlay traced outlines if available.

B / roadside approach. Match R07 and V1-01: four-level white gallery facade, roof line, boundary fence, palm rhythm, walkway and road setback.

C / signed entrance. Match R11: arch, piers, facade opening rhythm, blue sign, low boundary and planting strip. Check that sign does not float or intersect fence.

D / inner stair entry. Match R19/V1-12: projecting piers, perforated bay, small gabled canopy, approach paving, lawn and court fence relationship.

E / court long axis. Match V2-01/R14: court rectangle, lines, opposing hoop locations, blue edge and surrounding white wings.

F / lawn court. Match R16/V1-13/V3: open grass plot, palms and small trees, facade depth and paths.

Bicycle pass. Ride roadside walk, access opening, parking edge, inner approach and accessible court perimeter. Check collisions, gaps, kerb transitions and camera clipping. Do not claim route tests unless actually run in the game.

20 / Acceptance and unresolved evidence

Pass only with proof. Submit matched screenshots A-F, overhead footprint comparison, material summary, and collision/performance results. State what was implemented, what was verified and what remains provisional.

Major visual failures. A solid filled courtyard, flat red roof, extra floor, identical flat glass facade, misplaced court, missing arch/stair bays, wrong sign spelling or foliage across the walk requires correction before final polish.

Small structure uncertainty. 08/09/11 roof footprints are supported, but functions, heights and hidden sides are not fully documented. Include visible roofs and mark estimated volumes rather than fabricating precise identities.

Facade registration. Photographs show strong typologies, but exact mapping of every close-up to one of four wing segments is not uniquely established. Match entrance/stair patterns and neighboring court before assigning asymmetric detail.

Dates and season. Court paint, grass dryness, parked cars, laundry and sign panel appearance vary. Pick a coherent visible state; preserve permanent architecture across all sources.

No fabricated measurements. Exact lengths, roof pitches, storey heights and tree counts need project scale or extra evidence. Report estimates explicitly; do not certify them as measured real-world facts.

21 / Consolidated Claude prompt: 1/3

Task. Rebuild James Topp Nelson Yankah Hall and its immediate environs in LEGONRUSH using this PDF and the original supplied files. Produce a recognizable, carefully matched real-world reconstruction. Work only on this precinct; keep it separate from Evandy and Bani.

Inputs. Use M1 real satellite map and M2 game map; the 23 photographs in JAMES TOP YANKAH HALL REAL WORLD IMAGES.zip (internal TF HOSTEL folder); and JAMES TOP HALL VIDEO 1/2/3. Consult the annotated plates and chronological selected references.

Step 1: baseline. Inspect the actual game scene and generation code. Record source objects, transforms, bounds, materials and collisions. Capture overhead and ground-level baseline views. Do not claim 3D errors from the flat game map alone.

Step 2: site plan. Register maps by road 10, wing axes 01-04, court 06, lawn court 07 and small blocks 08/09. Correct footprints, orientation, middle connection 05, upper cluster 11, setbacks and access. Preserve both open courts; include confidently visible small roof structures.

Step 3: main masses. Model the observed four levels on clear main elevations, separate projecting stair/entry piers, roof section breaks and returning wings. Set dimensions from project scale where possible; identify remaining estimated values.

Non-negotiable. Do not fill courts, mirror the site, merge all roofs, add unsupported storeys, invent small-block functions or move the public road. Confirm exact camera-to-wing correspondence before placing asymmetric entrance details.

MANDATORY ADDITION TO THIS CLAUDE PROMPT / PAGES 43-45
The compulsory clause is an inseparable part of this prompt and its acceptance criteria. Inspect original-resolution crops; record each visible pillar, partition, opening and roof junction; then verify counts and positions floor by floor. Correct every known mismatch before marking verified elevations complete. Unclear details remain provisional.

22 / Consolidated Claude prompt: 2/3

Step 4: architecture. Build deep open gallery bands with white parapets/piers, brown/dark louvre panels, elevation-specific ground screens and enclosed window faces. Recreate the arched roadside portico and separate small gabled inner entrance. Add projecting piers and white perforated stair screens.

Step 5: roofs. Use terracotta pitched tile roofs with correct long ridges, hips, overhangs, dark fascia and distinct caps over projecting volumes. Keep stair gaps and small canopies. Place only supported tank/mast/service details.

Step 6: surfaces. Apply off-white plaster, brown/charcoal louvres, red-orange tiles, tan herringbone pavers, dark asphalt, blue court and green/dry lawn as separate materials. Compare under neutral daylight and select one consistent paint/season state.

Step 7: court. Build the single elongated lower court in its mapped location, with white lines, two opposite-end blue hoop frames, backboards/rims, blue edge/upstand, mesh fence and narrow perimeter route. Preserve courtyard width and facade/court clearances.

Step 8: landscape. Add palm-lined frontage with locally white-painted trunk bases, purple low groundcover beds, compact shrubs, inner lawn palms/broadleaf trees and open-field/woodland context. Do not block walkways, signs, parking or the court.

Step 9: boundary and identity. Model white low walls/posts, warm brown rectilinear metal panels, simplified wire coils, verified access openings, street furniture and source-supported road markings. Spell the sign JAMES TOPP NELSON YANKAH HALL. No invented official block numbers or commercial signs from pins.

MANDATORY ADDITION TO THIS CLAUDE PROMPT / PAGES 43-45
The compulsory clause is an inseparable part of this prompt and its acceptance criteria. Inspect original-resolution crops; record each visible pillar, partition, opening and roof junction; then verify counts and positions floor by floor. Correct every known mismatch before marking verified elevations complete. Unclear details remain provisional.

23 / Consolidated Claude prompt: 3/3

Step 10: integration. Modify the owning scene/procedural data, retain stable IDs and avoid duplicate overlapping assets. Use shared modules, instancing and appropriate LOD. Keep roads, pavers and terrain continuous and rideable.

Step 11: verification. Submit overhead, roadside approach, signed entrance, inner stair entry, court long-axis and lawn-court screenshots matched to pages 19 and the evidence plates. Compare footprint voids, four-level rhythm, roof silhouette, court placement and material boundaries.

Step 12: game testing. Ride all accessible precinct paths and approaches. Check gates, fencing, hoops, kerbs, poles and plant collisions; inspect flicker, clipping, floating assets and invisible obstacles. Record actual performance measurements and tests run.

Required response. List modified files/object sources; summarize geometry, materials, landscape and labels; attach matched screenshots; state tests run and performance outcome; provide a concise uncertainty list with provisional heights, hidden faces and unmatched small structures.

Completion rule. Do not declare the hall complete because the map pin exists or the facade is white. Completion requires the open site topology, distinctive portico/stair galleries, terracotta roof geometry, court, boundary and landscaped ground to agree with the references.

Evidence honesty. Keep video overlays, captions, watermarks, map pins and temporary people out of the built architecture. Do not fabricate exact dimensions, date order, surveyed camera positions or 3D defects absent from the baseline. Resolve what can be resolved, and clearly document remaining estimates.

MANDATORY ADDITION TO THIS CLAUDE PROMPT / PAGES 43-45
The compulsory clause is an inseparable part of this prompt and its acceptance criteria. Inspect original-resolution crops; record each visible pillar, partition, opening and roof junction; then verify counts and positions floor by floor. Correct every known mismatch before marking verified elevations complete. Unclear details remain provisional.

Video 1 / selected snapshots 1-2

V1-01 / 00:00.0 Roadside overview and gallery rhythm



V1-02 / 00:03.0 Arched frontage and fence



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 3-4

V1-03 / 00:15.0 Palm verge and interlocking walk



V1-04 / 00:21.0 Road approach and distant gate context



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 5-6

V1-05 / 00:30.0 Vehicle access and parking apron



V1-06 / 00:39.0 Long facade and end tower



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 7-8

V1-07 / 00:42.0 Window and gallery close-up



V1-08 / 00:45.0 Hall sign and doorway



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 9-10

V1-09 / 00:48.0 Returning elevation and parked cars



V1-10 / 00:51.0 Paved path beside court fence



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 11-12

V1-11 / 00:57.0 Court enclosure and opposing wings



V1-12 / 01:00.0 Stair bay, entry canopy and lawn



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 1 / selected snapshots 13-13


V1-13 / 01:03.0 Inner lawn, palm and cross-court block




Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 2 / selected snapshots 1-2

V2-01 / 00:02.0 Unobstructed court overview and markings

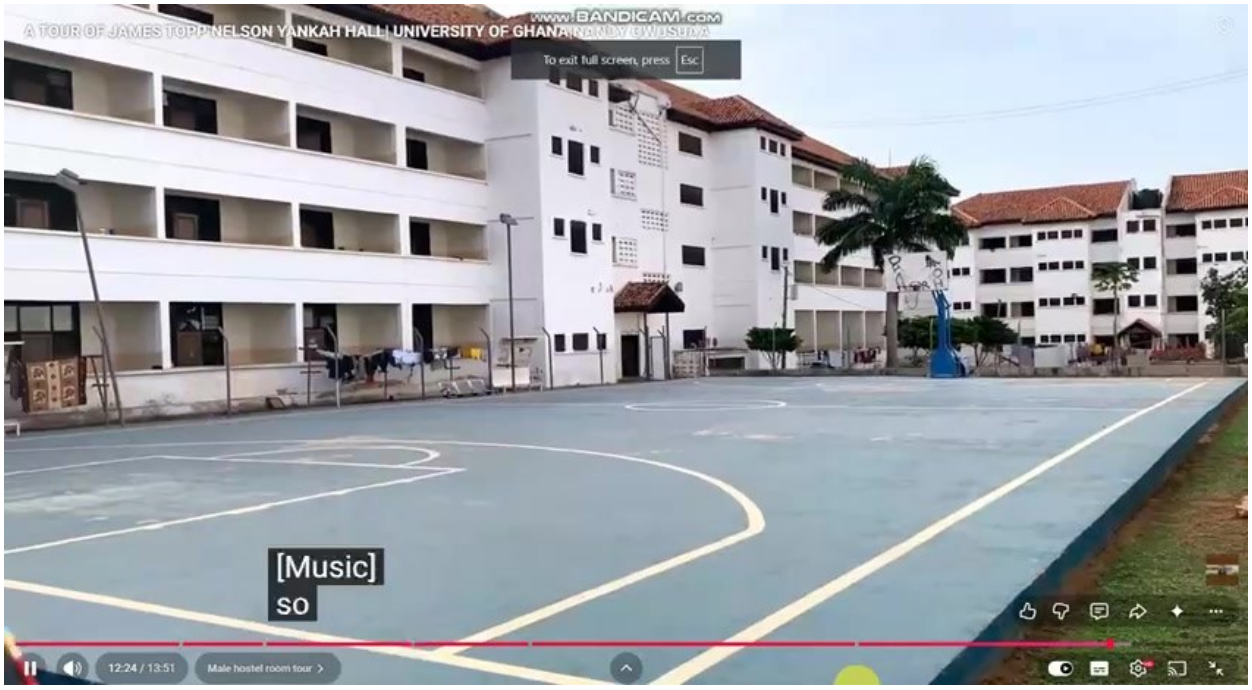

V2-02 / 00:06.0 Blue hoop frame and open galleries

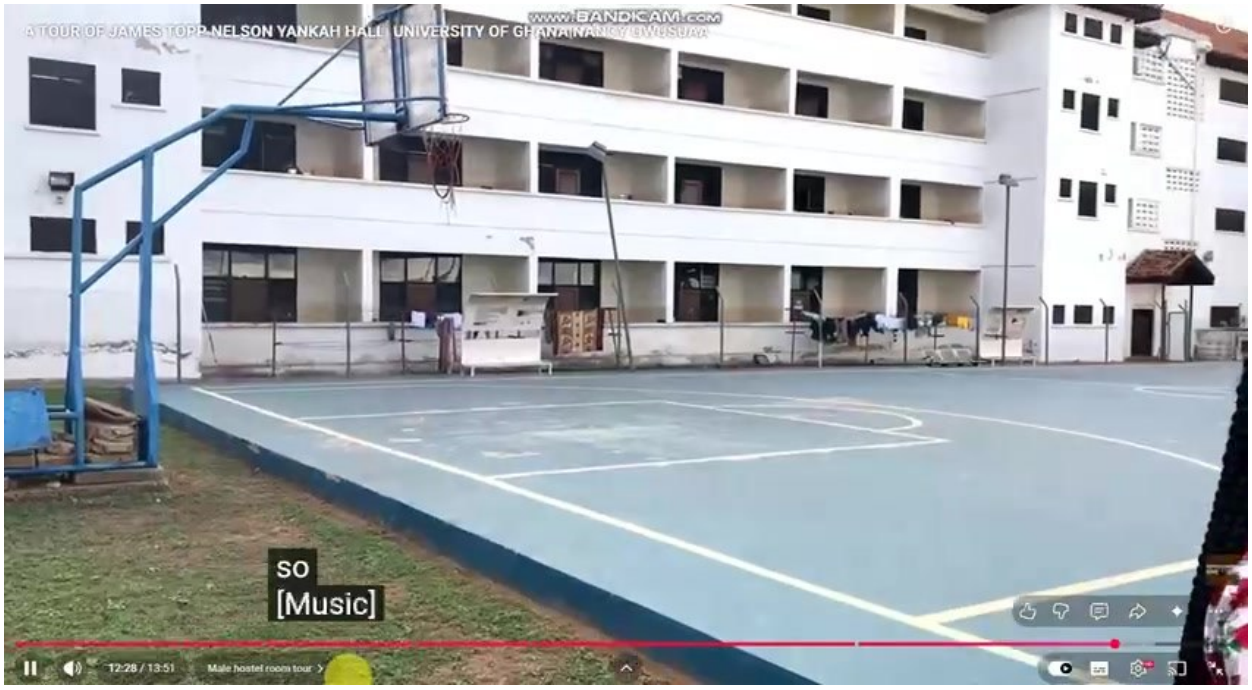

Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 2 / selected snapshots 3-3

V2-03 / 00:11.0 Long court axis and far block



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 3 / selected snapshots 1-2

V3-01 / 00:01.0 Court boundary through chain-link



V3-02 / 00:03.0 Lawn, palms and inner galleries



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Video 3 / selected snapshots 3-4

V3-03 / 00:05.0 Perforated stair bay and entrance



V3-04 / 00:12.0 Second stair-bay angle



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.


Video 3 / selected snapshots 5-5

V3-05 / 00:16.0 Courtyard planting and utility context



Original frame content retained. Screen controls, watermarks, subtitles and temporary foreground objects are source artifacts, not modeling instructions.

Photographs / selected set 1

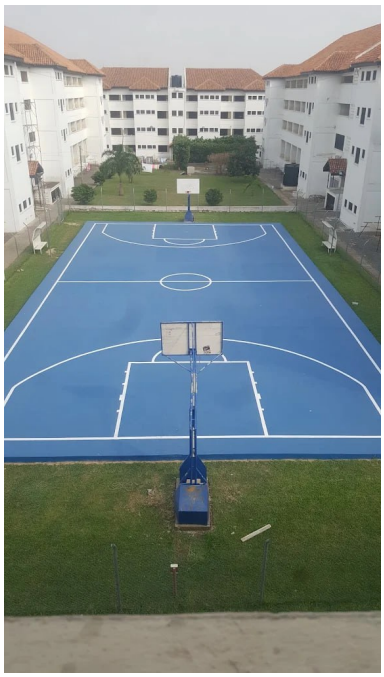

R02 / photo_2

Brighter blue court and green perimeter



R03 / photo_3

Parking-side ground screens



R04 / photo_4

Close gallery and louvre detail



R06 / photo_6

Palm verge and boundary

Full-resolution originals remain the detailed modeling reference; appendix images are selected views for convenient cross-checking.

Photographs / selected set 2



R07 / photo_7

Long roadside gallery elevation



R08 / photo_8

Wing end and fence



R09 / photo_9

Corner volume and roof



R11 / photo_11

Signed arched roadside entrance

Full-resolution originals remain the detailed modeling reference; appendix images are selected views for convenient cross-checking.

Photographs / selected set 3



R14 / photo_14

Court long-axis and hoop



R15 / photo_15

Worn court surface state



R16 / photo_16

Lawn court and windows



R17 / photo_17

Frontage planting and fence

Full-resolution originals remain the detailed modeling reference; appendix images are selected views for convenient cross-checking.

Photographs / selected set 4



R18 / photo_18

Inner sign and entrance canopy



R19 / photo_19

Perforated stair entry and court path



R20 / photo_20

Elevated lawn-court relationship




R21 / photo_21

Outer block and boundary context

Full-resolution originals remain the detailed modeling reference; appendix images are selected views for convenient cross-checking.

Photographs / selected set 5

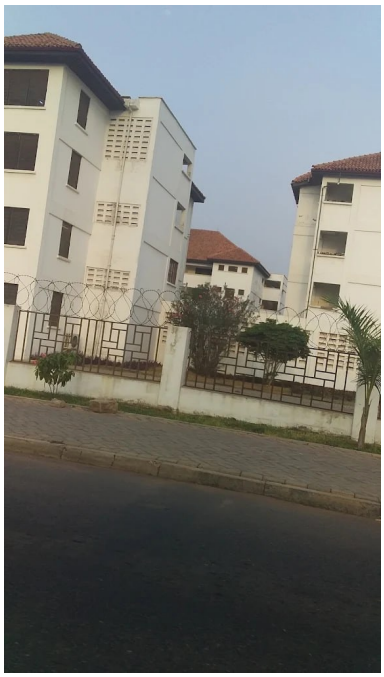

R22 / photo_22

Tall stair/end volume



R23 / photo_23

Herringbone pavement and road

Full-resolution originals remain the detailed modeling reference; appendix images are selected views for convenient cross-checking.

Source register and selection notes

Maps. M1 = image(6).png, real satellite plan. M2 = image(5).png, game map. Neither map supplies reliable height measurements or an explicit compass in the provided crop.

ZIP. JAMES TOP YANKAH HALL REAL WORLD IMAGES.zip contains 23 JPGs under TF HOSTEL REAL WORLD IMAGES. Rnn maps to photo_n_2026-10-14_01-55-41.jpg. Filename timestamp is provenance, not established camera capture time.

Selected photographs. R02, R03, R04, R06, R07, R08, R09, R11, R14, R15, R16, R17, R18, R19, R20, R21, R22 and R23. Selection covers court, frontage, interiors, stair bays, roof and paving.

Photographs not reproduced. R01: partially blocked frontage; R05: court obscured by hoop/fence/laundry; R10: similar entrance view, R11 clearer; R12: tilted court duplicates; R13: palm-obstructed road view. All were reviewed and remain available in originals.

Video selection. V1: 00:00, 00:03, 00:15, 00:21, 00:30, 00:39, 00:42, 00:45, 00:48, 00:51, 00:57, 01:00, 01:03. V2: 00:02, 00:06, 00:11. V3: 00:01, 00:03, 00:05, 00:12, 00:16.

Omitted footage. Redundant views, moving or obstructed images, playback overlays and people occupying architectural sightlines were deprioritized. V3 remains lower-light and visibly tilted; its useful role is courtyard/stair corroboration rather than precise colour calibration.

Final limits. This is a visual reconstruction specification, not a measured survey or completed in-game modification. Claude must use the game project and references to implement and validate the result.

Mandatory inspection: evidence first

James Topp Nelson Yankah Hall / This clause supplements the original brief. Read all three pages before implementation.

BINDING REQUIREMENT - READ BEFORE EDITING. These three pages are part of the consolidated Claude prompt and its acceptance criteria. They take precedence over any generic repetition, inferred symmetry or simplification that would contradict visible architectural detail. Do not begin detailed facade, opening, pillar or roof placement until the evidence record below is prepared for that elevation.

1 / Inspect original-resolution evidence. Open the original photographs and video frames, not only the reduced PDF thumbnails. For each visible building face, inspect the whole elevation, then crop by wing, floor and facade bay. Zoom to native detail; magnification does not create missing information. Review neighboring video frames when blur, shadows, trees or people conceal a feature. Do not use generated enhancement as evidence of a new opening.

2 / Register the actual building face. Match the roof shape, entrance, stair bay, courtyard and neighboring buildings to identify the wing and viewing direction. Record a stable elevation ID and source IDs/timestamps. Do not attach a close-up to the wrong wing, mirror its left/right order or treat a returning side face as the front elevation.

3 / Produce an annotated close-up pack. For every sufficiently visible elevation, submit one overview plus enlarged crops of the ground level, each upper level, stair/entrance bays and roof junctions. Number the visible pillars/piers, solid wall segments and openings. Include source IDs and crop boundaries so the annotations can be checked against the uncropped image.

4 / Read structure, not just colour. Distinguish load-bearing-looking piers/columns, wall returns, gallery dividers, railings, louvre screens, ventilation blocks, closed shutters and shadowed corridor voids. Do not label every dark rectangle a window or every white vertical strip a freestanding pillar. Do not infer structural engineering roles from a photograph.

STOP CONDITION. If the original reference cannot be opened or an important placement remains obscured, flag that affected bay as unresolved and keep it provisional. Continue verified areas. Do not silently substitute a generic facade, invent a window/door or claim inspection that was not performed.

Local focus: Separate open gallery faces, enclosed window faces, projecting piers, perforated stair screens, the arched roadside portico and smaller inner gabled entry. Each needs its own placement evidence.

Mandatory placement record and build

James Topp Nelson Yankah Hall / This clause supplements the original brief. Read all three pages before implementation.

5 / Create a floor-by-floor evidence ledger. Before placing details, provide a table with: building/elevation ID; floor; bay number ordered left-to-right in the registered view; feature type; source ID/timestamp; visible count; relative position and width/height; recess/projection; observed state; confidence; and unresolved notes. Separate directly observed facts from estimates. Use normalized facade coordinates if exact project dimensions are unavailable.

6 / Record every visible wall division. Trace the outer wall outline, floor/slab bands, parapets, vertical dividers, stair volumes, recess boundaries and changes between solid wall and gallery. Record uninterrupted blank wall spans explicitly. Check where divisions align between floors and where they change. Do not create a universal bay grid until repetition is confirmed on that particular face.

7 / Place pillars only where supported. Map each visible column/pier to its correct floor and bay, including its relation to gallery edges, entrances and wall returns. Preserve observed width, spacing, depth and offsets. No evenly spaced decorative pillars may be added to a plain wall. A railing post, drainpipe or shadow must not become a structural column.

8 / Place windows and doors individually. Confirm count, left/right order, sill/head height, proportions, frame divisions, louvres/shutters, recess and floor location. Distinguish a genuine opening from a closed panel or gallery void. Record whether a window/door is shown open or closed, and whether it swings, slides or is uncertain. Preserve supported differences; do not animate an unsupported mechanism.

9 / Inspect roof and canopy junctions. Map each roof plane, ridge, hip/gable, eave, fascia, overhang, height break, stair cap and canopy. Verify where roofs terminate or overlap and where a gap remains. Match entrance roofs separately from main roofs. Roof fixtures require positive evidence; do not scatter tanks, vents or masts by assumption.

10 / Build from the ledger. Translate each confirmed feature into geometry or a faithful material detail at the mapped position. Share meshes only after matching repetition. Keep per-elevation exceptions. Do not stamp an identical pillar/window pattern onto all wings, floors or sides, and do not borrow architecture from Evandy or another hall.

Mandatory verification and rejection

James Topp Nelson Yankah Hall / This clause supplements the original brief. Read all three pages before implementation.

11 / Compare at matched camera angles. For each completed elevation, render an overview and close-ups matching the reference direction and approximate perspective. Use side-by-side crops or aligned overlays. Compare floor by floor and bay by bay; an overhead screenshot alone cannot verify window, door or pillar placement.

12 / Run a count-and-position audit. Check modeled versus observed pillar/piers, windows, doors, blank wall spans, gallery partitions, stair screens and roof breaks. Verify their floor, order, spacing and relationship to entrances. Compare proportions in image space when exact measurements are missing; report deviations rather than inventing surveyed tolerances.

13 / Required correction cycle. If a pillar occupies the wrong bay, a window cuts a verified blank wall, a door appears on the wrong floor, wall partitions are missing, galleries are flattened or roof joints disagree, mark that elevation FAILED. Correct it, recapture the comparison and audit again before calling the elevation complete.

14 / Completion evidence. Deliver the annotated close-up pack, completed feature ledger, matched reference/render comparisons, discrepancy list with fixes, and explicit unresolved items. The discrepancy list must identify elevation/floor/bay, expected feature, current result and correction. Assertions such as "looks similar" or "details added" are insufficient.

15 / Honest limits and priorities. Inspect every identifiable detail available at source resolution. Never claim hidden, blurred or obstructed details are confirmed. Mark estimates and defer unsupported decoration. Optimise after placement is verified; preserve all supported opening locations, blank walls, partitions and landmark silhouettes when reducing detail.

FINAL ACCEPTANCE RULE. The reconstruction is not complete until every adequately documented elevation passes the placement audit. Unresolved elevations must remain explicitly provisional. Zero known unexplained placement errors are acceptable in verified areas. Do not claim a whole-building pass if an affected face is unverified.