JJ Rawlings Avenue: detailed repair instructions

Okponglo link toward Total, Legon First and Legon Second

A separate implementation brief for Claude. Scope: the six supplied game/real-world view pairs and the four supplementary layouts. Correct the scene through evidence about placement, land use, surface materials, roadside structures and vegetation. This document does not claim unseen building dimensions or a surveyed terrain profile.



Picture 16: user-annotated satellite overview. Original blue view arrows and yellow site outline are preserved.

Highest-priority corrections

Restore the dirt access frontage and paved walking strips; restore yard fencing, low service structures, stored-material silhouettes and visible machinery; correct the GRA frontage; replace generic lawn and ornamental tree coverage where the references show irregular scrub. Retain the real dual carriageway and legitimate sports fields.

Site identity: yellow machinery is visible, but a quarry is not established. Use a neutral yard label until stronger evidence is available. Reconstruct observable features rather than inventing excavation.

Source register and numbering

Numbering follows attachment order. Odd pictures 1-11 are game views; their following even pictures 2-12 are real views. The same scene may appear from different headings or camera positions; these are reference pairs, not pixel-aligned photographs.

Pair 1: game picture 1 / real picture 2. Files: image(20261015-000147).png / image(20261015-000327).png.

Pair 2: game picture 3 / real picture 4. Files: image(20261015-000346).png / image(20261015-000421).png.

Pair 3: game picture 5 / real picture 6. Files: image(20261015-000427).png / image(20261015-000433).png.

Pair 4: game picture 7 / real picture 8. Files: image(20261015-000442).png / image(20261015-000453).png.

Pair 5: game picture 9 / real picture 10. Files: image(20261015-000500).png / image(20261015-000528).png.

Pair 6: game picture 11 / real picture 12. Files: image(20261015-000752).png / image(20261015-000802).png.

Picture 13: detailed satellite layout. **Picture 14:** wider satellite layout showing sports-field context. **Picture 15:** supplied vector/game layout. **Picture 16:** annotated satellite with directions 1-6 and the yellow yard outline.

The accompanying message calls picture 5 a map and refers to pictures 12/13 as Apple layouts. The actual attachments show picture 5 as a game screenshot, picture 12 as Street View, pictures 13/14 as satellite layouts, and picture 15 as the vector/game map. These visual roles are used throughout this brief.

Evidence limits and dates

Street View labels show September 2024. Satellite capture dates are not provided. Treat this as reproduction of the supplied reference period. Vehicle positions and advertisement text are temporary; stable geometry, fences, paths, roof masses and vegetation patterns have priority.

Confirmed visible: what can be located directly in the supplied image. **Supported inference:** a relation supported by multiple views but still requiring scene registration. **Unresolved:** hidden walls, exact dimensions, site ownership, precise roof/storage classification, height or identity not established by these images.

Layout registration: match the correct road side



Picture 16, original. Numbers 1-6 identify the user's view families; they are not surveyed camera coordinates.

1: GRA-side road view. **2-3:** eastern dirt-access/billboard frontage. **4:** longitudinal road view beside that frontage. **5-6:** views toward the western fenced yard. Use these as orientation constraints and confirm the camera heading against recognizable objects.

Align the avenue centerline first. Use the GRA roof cluster, the western red-roof service building and the large yard boundary as additional anchors. Maintain east/west relationships even when the game camera rotates. A building visible behind a verge must not be placed inside the median.

Satellite layout: yard, access and vegetation



Picture 13 with added callouts. Numbers on this page are local feature IDs, distinct from the user's blue direction numbers.

1 — Yard interior: long grey rows in a pale bare compound. Trace their actual orientation and spacing; their precise function is unresolved. Do not replace them with turf rectangles.

2 — Southern service area: red-roof building, smaller structures and circulation space. Distinguish low built volumes from storage rows. Keep gaps and access routes visible.

3 — Road spine: two carriageways with a central separator. Preserve this genuine road topology; derive widths from a registered layout, not a wide-angle screenshot.


4 — Eastern frontage: pale dirt opening and tracks within patchy vegetation. Preserve this as a different surface and land-use zone from the paved main road.

5 — GRA context: existing roof cluster on the eastern side. This anchors Pair 1 and protects legitimate nearby buildings from broad deletion.

Protect the real sports fields; repair the yard map



Picture 14: wider real-world layout. The northwest sports fields are real features.

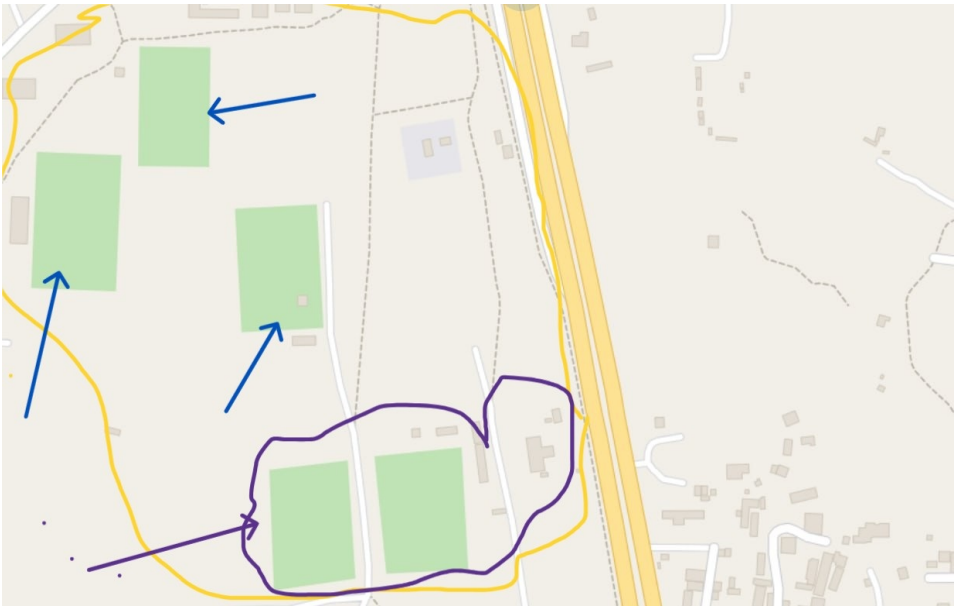

Picture 15: supplied vector/game map. Purple outline surrounds the disputed southern field-like polygons and associated structures.

The southern outlined green rectangles appear to conflict with the yard in pictures 13/16. Register both maps before editing. If these polygons drive grass or playing-field meshes inside the confirmed yard footprint, replace that land cover with the yard geometry. A vector green fill alone does not prove how a game mesh is generated.

Preserve the separate northwestern pitches supported by picture 14, including their open surface, boundaries and nearby roof masses. Do not apply a global “remove sports fields” operation. Check the rendered mesh and its source polygon ID individually.

Yellow-marked site: what the evidence supports



Detail from picture 13. Bare circulation areas, grey rows, roofs and vegetation are distinguishable; exact industrial use is not.

Visible evidence: a bounded roadside compound; grouped long grey elements; several small roofed volumes; bare tan/red soil; scrub buffers; and, in pictures 10/12, yellow machinery with a raised boom, blue-grey panel fencing and a green container-like volume.

Quarry question: machinery does not establish quarrying. The supplied images do not resolve an extraction pit, exposed quarry face, excavation benches or a confirmed quarry label. The correct description here is an equipment/material/construction yard with exact use unconfirmed. This does not prove that quarry activity is impossible elsewhere.


Required model: irregular bare yard floor, traceable grouped rows, low service structures, roadside fence/wall segments, a machinery silhouette where supported, and uneven vegetation buffers. Do not invent deep pits, giant rock heaps, a conveyor system, a branded fleet or a continuous high-rise building.

The yellow outline includes greener edge areas as well as the working compound. It is a study boundary, not evidence that every enclosed square metre must be paved or built. Keep the northern scrub and perimeter gaps supported by the satellite.

Pair 1: GRA frontage and road-side context



Picture 1 — current game view.

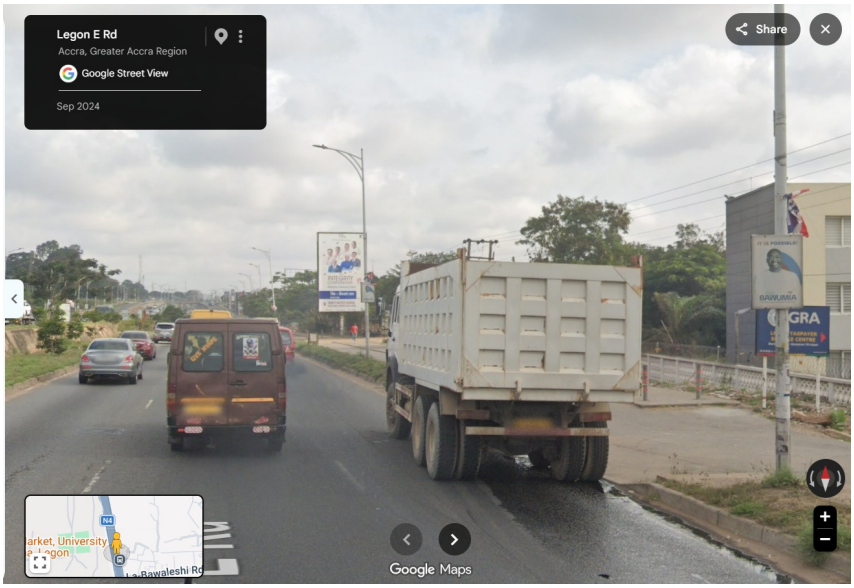


Picture 2 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

The game contains a cream building with a dark end face, a useful existing anchor. The game's uninterrupted grass frontage omits the visible boundary railing/wall and paved access.

Preserve / cross-check: Existing cream building, road route and legitimate surrounding roofs should be retained unless registration proves displacement.

Pair 1: numbered corrections

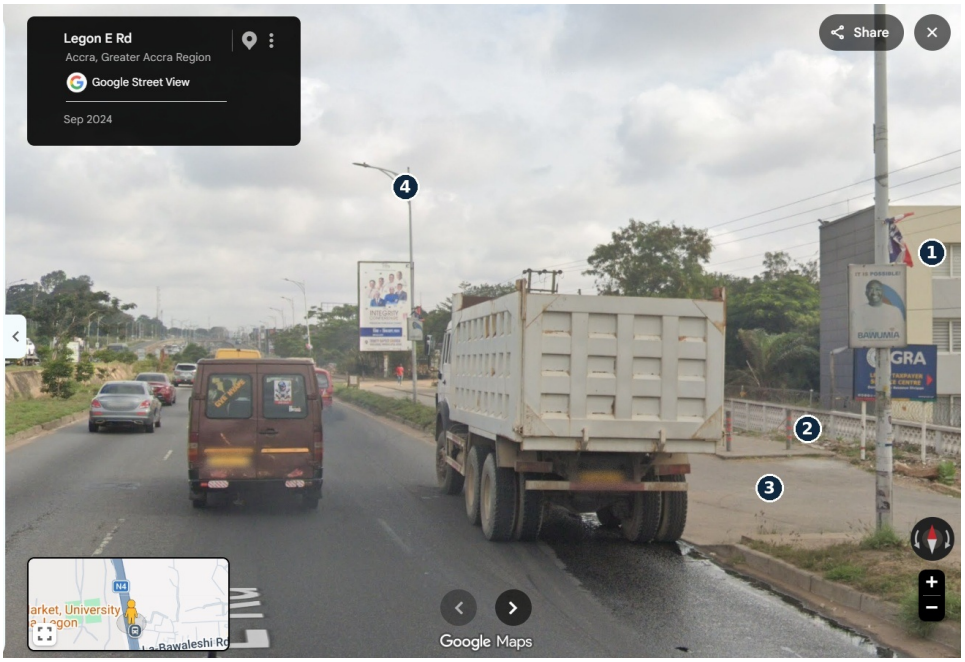

Picture 2: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. GRA building: The game contains a cream building with a dark end face, a useful existing anchor. The real view shows a cream/grey office frontage and GRA identification, partially blocked by traffic. Match its footprint, setback, visible roofline and facade divisions; do not infer concealed window counts or floors from the truck-obscured view.

2. Boundary and entrance: The game's uninterrupted grass frontage omits the visible boundary railing/wall and paved access. Add the corresponding wall/railing segments, entrance gaps and forecourt. Trace openings separately from solid panels; access must connect to the road without crossing a solid barrier.

3. Verge materials: Replace lawn inside the evidenced hard-surface frontage with muted grey paving. Keep separate grass/hedge strips where visible; do not turn every verge into concrete. Locate kerbs and pedestrian edges from the real view.

4. Utilities and alignment: Reproduce the slender curved streetlight form and cross-arm utility-pole pattern where supported. Connect wire runs plausibly to poles. Camera positions differ: compare road edge, building setback and frontage silhouette after heading alignment.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Pair 2: Wide dirt access: missing frontage geometry



Picture 3 — current game view.



Picture 4 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

The real image contains a broad dusty access/forecourt. Place the tall board at the evidenced frontage position, with its narrow support and framed panel.

Preserve / cross-check: Do not delete every background red-roof building from a single occluded image; check footprint evidence first.

Pair 2: numbered corrections



Picture 4: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. Dirt opening: The real image contains a broad dusty access/forecourt. The game substitutes a large uniform lawn with very little frontage detail. Rebuild the irregular tan/red earth polygon, its mouth at the road and inward continuation. Use mottled compacted-earth texture with subtle gravel; do not assign asphalt or road lane markings.

2. Billboard: Place the tall board at the evidenced frontage position, with its narrow support and framed panel. Verify which side of the dirt opening it occupies. Its back and edge profile must be visible from oblique views; do not place it in the traffic lane.

3. Fence and planted edge: Restore the open framed gate/fence line and the small planted trees/containers along the access boundary. Keep openings between bars and distinguish low objects from walls. Dirt should remain visible through the open fence.

4. Background and hard paving: Locate the right-side office/frontage and its local grey hard surface independently from the dirt yard. The opposite main carriageway is real; do not delete it simply because the real camera looks into a side entrance. Verify whether any game road spur actually crosses the access polygon.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Pair 3: Dirt frontage, billboard and planted containers



Picture 5 — current game view.



Picture 6 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

Game picture 5 shows a grass-dominated cross-road view. Use the billboard as a shared anchor with Pair 2 and Pair 4.

Preserve / cross-check: The asphalt foreground remains the public road. Earth begins beyond its edge; narrow footway paving remains a separate strip.

Pair 3: numbered corrections



Picture 6: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. Surface boundary: Game picture 5 shows a grass-dominated cross-road view. Real picture 6 shows a broad dusty entry and adjoining paved pedestrian strip. Separate those surfaces at their visible border instead of creating a clean grass rectangle.


2. Board geometry: Use the billboard as a shared anchor with Pair 2 and Pair 4. One physical board must explain all three views; do not create a duplicate for each image. Adjust camera heading before changing its location.

3. Open enclosure: The right-side gate is an open metal frame with gaps. Model bars and posts as individual slender pieces, not an opaque facade. Do not close the entire access with a solid wall.

4. Small roadside detail: The reference shows planted small trees in tyre-like containers and clustered pots/containers under the tree canopy farther left. Reproduce their scale and clustered placement where discernible. Avoid giant trees or continuous manicured hedging in place of these small objects.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Pair 4: Roadside footway, pots and small trees

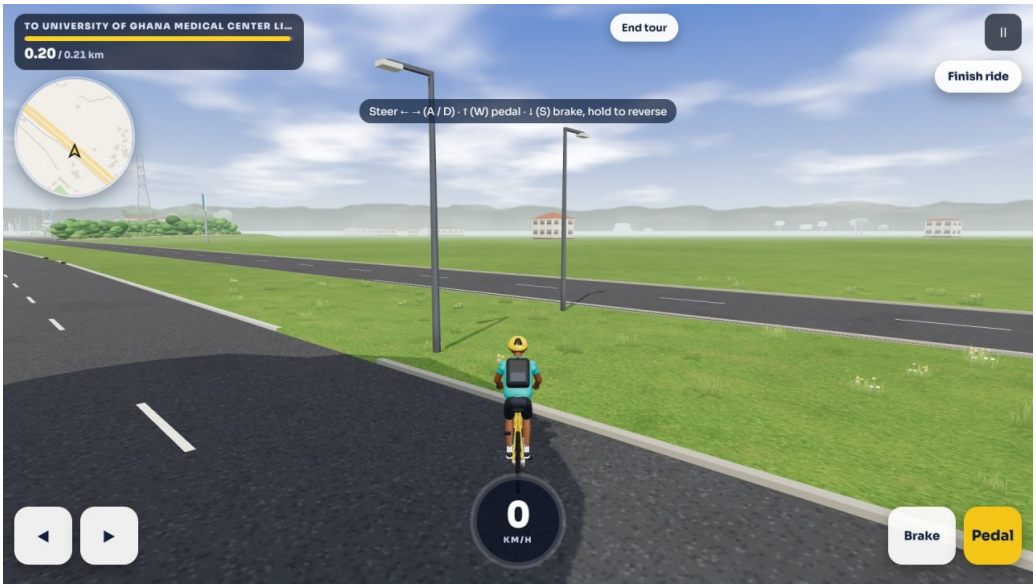

Picture 7 — current game view.



Picture 8 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

The real view shows a longitudinal grey slab/paved strip between the road edge and frontage. Place the visible grouped pots/containers beneath and behind the roadside trees, using varied warm earth tones and modest height.

Preserve / cross-check: This photo looks along the corridor, so depth compression can conceal the opposite carriageway. Do not interpret that occlusion as proof it does not exist.

Pair 4: numbered corrections



Picture 8: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. Walking strip: The real view shows a longitudinal grey slab/paved strip between the road edge and frontage. Game picture 7 presents a clean lawn-separated road with sparse detail. Restore the visible strip, seams and slight ground variation; keep the entrance crossing traversable.


2. Container cluster: Place the visible grouped pots/containers beneath and behind the roadside trees, using varied warm earth tones and modest height. They are individual objects, not a continuous building. Do not block the usable walking line.

3. Billboard and gate: Match the billboard's edge-on thickness and its support; retain the same object used in Pairs 2/3. Restore the adjoining metal frame gate and low planted containers. Account for the partly occluded edge in the reference.


4. Roadside planting and poles: Use spaced slender trunks with irregular leafy crowns, small planted trees and the visible streetlight/utility pattern. Do not fill the footway with a dense wall of large spherical trees. Road traffic indicates a functioning carriageway; maintain its continuity.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Pair 5: Yard edge: machinery, fencing and scrub

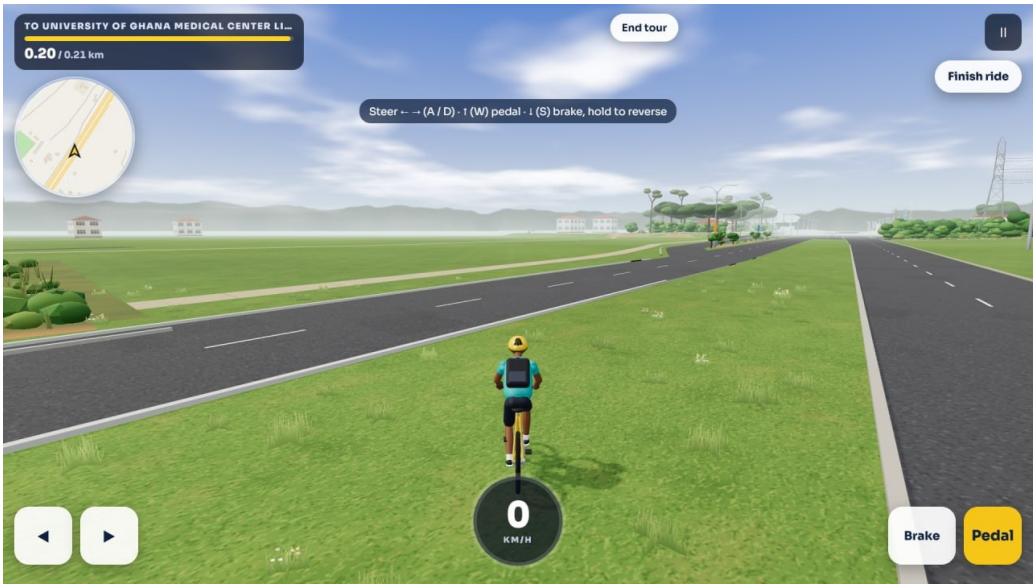

Picture 9 — current game view.

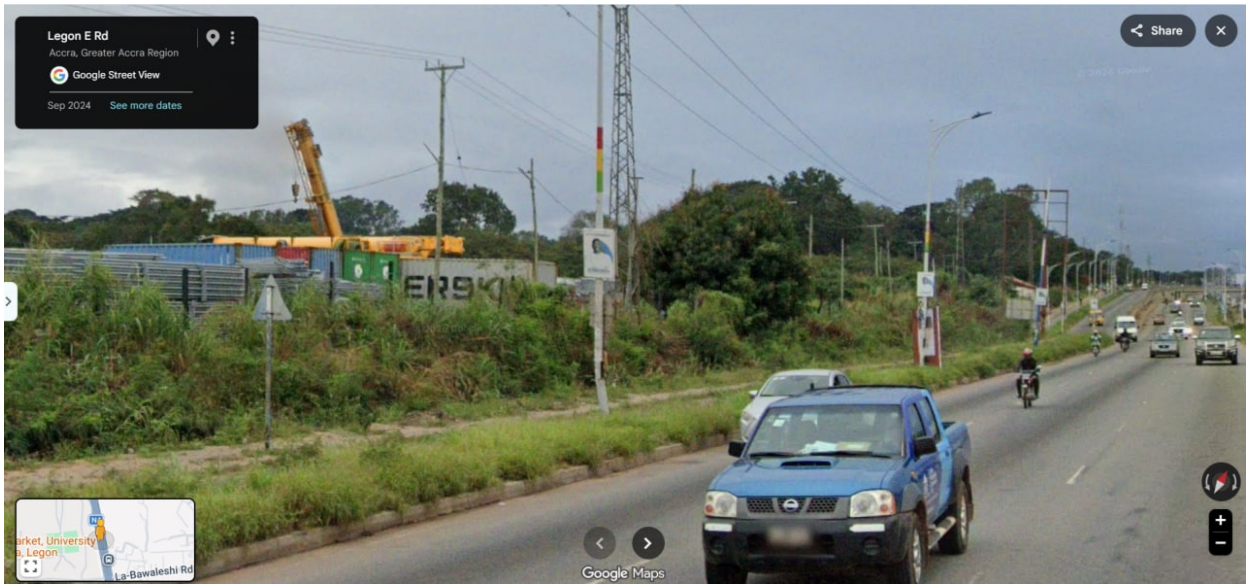

Picture 10 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

The raised yellow boom and horizontal yellow machine body are visible inside the compound. The game's expansive lawn omits panel fencing, wall sections and container-like units.

Preserve / cross-check: The existing game road and path provide useful anchors. Correct the missing yard and the verge proportions after layout registration.

Pair 5: numbered corrections



Picture 10: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. Machinery silhouette: The raised yellow boom and horizontal yellow machine body are visible inside the compound. Add a restrained matching silhouette at the registered yard position. The image does not establish a Caterpillar brand or an excavation pit. Do not use this alone to classify a quarry.

2. Compound enclosure: The game's expansive lawn omits panel fencing, wall sections and container-like units. Restore the blue-grey corrugated/panel line, adjacent grey wall portions and green container-like volume; separate each asset and preserve their varying heights.

3. Scrub buffer: Replace the neat lawn at the compound edge with irregular bushes, climbing vegetation and rough grass. Mix low growth and some higher dense shrubs. Keep partial views of machinery and the fence instead of completely hiding them behind tall trees.

4. Road-to-yard section: Model the asphalt edge, kerb/rough grass strip, narrow walking path, scrub and enclosure in the order visible. The path runs along the frontage rather than becoming a wide asphalt road. Preserve poles and overhead lines as corridor elements.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Pair 6: Low service structures behind an overgrown fence



Picture 11 — current game view.



Picture 12 — supplied real-world view. The paired cameras are not exactly coincident.

Diagnosis

The real image shows a small weathered grey service volume on the left and a long low roofed/open-frame structure farther back. Trace the thin low roof profile and open posts where visible, plus mesh/wire and panel sections.

Preserve / cross-check: Use both Pair 5 and Pair 6 to place the same fence, machinery and service structures. These are different views of one compound, not separate compounds.

Pair 6: numbered corrections



Picture 12: local callouts 1-4. Each number identifies the feature discussed below, not a camera coordinate.

1. Low structure: The real image shows a small weathered grey service volume on the left and a long low roofed/open-frame structure farther back. The game shows generic cream/red-roof accommodation forms. Replace only footprints confirmed to conflict with these yard features. Do not invent an extra storey.

2. Roof and enclosure: Trace the thin low roof profile and open posts where visible, plus mesh/wire and panel sections. Some grey satellite rows may be roofed bays or stored components; uncertain items should remain simple reference-matched masses, not fully specified buildings.

3. Vegetation character: Game picture 11 uses dominant round trees and tidy grass patches. Real picture 12 has a tangled low-to-medium scrub belt, rough grass and vines, with taller vegetation mainly behind. Restore irregular density and visible gaps; keep the fence partly readable.

4. Footway and roadside edges: The real frontage includes a narrow light paved walking strip with rough or vegetated joints and a grass/kerb strip beside asphalt. Use a constrained material mask; do not convert the whole roadside band into one uniform pavement or dirt texture.

Acceptance: capture this heading in the game and show the corrected feature silhouette, surface boundary and access opening. Re-check its position from the adjacent pair before marking complete.

Compulsory inspection clause for Claude

MANDATORY — inspect before modelling; no generic substitution. Open every original at full resolution. Zoom into each affected feature and create cropped references before making changes. A contact sheet, satellite thumbnail or distant game screenshot is not sufficient for placing a wall, window, roof, gate or column.

Required feature ledger

For every affected structure or enclosure, record: source picture and crop; side/orientation; footprint; visible height/storeys; roof profile and slope; wall segments; actual openings; post/pillar count and spacing; fence/gate transparency; material/color; adjacent ground surface; and confidence. Use “unresolved” where the reference hides a detail. Do not fill unseen sides with invented window patterns.

Divide each facade or fence into bays from left to right in the reference-facing view. Classify every bay as solid wall, open passage, gate, railing, window, door or unresolved. Retain the actual gaps between posts. Do not turn an open frame into a solid panel, put supports across a passage, or treat a fence post as a building column.

Separate roofed buildings from yard contents

Long satellite rectangles are not automatically buildings. Cross-check their shadows, edge shape and overlap with Street View before adding walls. Do not infer storey count from plan imagery. For confirmed low yard/service structures, model the low roof and visible support/wall pattern; do not reuse a multi-storey residential prefab.

No silent guesses

No exact metre dimensions are established by this set. Derive relative dimensions from a registered map and known scene anchors, then state the calibration basis. Record ambiguous height, hidden opening count and site identity as unresolved. Where essential detail is missing, make the uncertain geometry easy to revise and list the additional view required.

Completion requires a feature-by-feature comparison using the originals and new game captures. Do not report “matches perfectly” on the basis of plausible appearance. Explicitly report what matched, what was corrected and what remains unresolved.

Implementation sequence and safeguards

1. Inventory and registration: Locate the affected road meshes, land-cover polygons, building IDs, fences, vegetation groups and map features. Identify how the minimap and rendered world are generated. Align road spine and at least two independent site anchors; preserve the current scene as a reversible baseline.

2. Existence and placement: Create an add/retain/reshape/relocate/remove ledger. Place the yard and GRA compound on the correct road sides. Confirm a conflicting footprint before removing a generic building. Match low roof/service masses and trace the bare working area.

3. Road and ground materials: Retain both actual carriageways. Match median and frontage widths using the registered map. Draw separate asphalt, dirt, paving, grass and scrub masks. Open the dirt access mouth without a blocking kerb or fence; check terrain/mesh seams and bicycle traversal.

4. Structures and small objects: Add supported fencing, posts, open gates, billboard, low roofs, pots/tyre containers, utility poles and machinery. Apply the feature ledger to each. Keep billboard identity consistent across Pairs 2-4 and yard identity consistent across Pairs 5-6.

5. Vegetation and materials: Use irregular scrub at the yard edge, spaced small trees at the eastern frontage, and appropriate taller background crowns. Match grey weathered service surfaces, blue-grey enclosure panels, cream office walls and tan/red earth. Do not color-match sun glare or deep shadows as paint.

6. Verify all outputs: Capture the six reference headings plus an overhead view. Compare landmark order, access openings and silhouettes; correct topology before decorative detail. Update the minimap source if it still displays the wrong yard coverage. Check collisions, road continuity and performance with repeated small assets.

Acceptance checklist and review evidence

Layout: the GRA-side frontage, eastern dirt entry and western compound sit on the correct sides of the avenue. The yard has the correct north/south extent relative to the GRA cluster. All six viewpoints identify the same shared objects.

Surface: genuine public-road asphalt remains. The dusty frontage is earth rather than lawn or an invented road. Local grey paving remains distinct. Sports fields supported by picture 14 remain intact. Wrong green coverage inside the registered yard footprint is corrected in both map and world if applicable.

Structure: visible service volumes are low, with matching roof silhouettes; confirmed open frames have real gaps. Fences, gates and billboards are not monolithic walls. Windows and doors are only added where justified; no speculative repeated facade grid is accepted.

Vegetation: the compound edge reads as untidy scrub and grass, not rows of giant ornamental spheres. Small planted trees and clustered containers appear at the eastern frontage. Actual access and walking strips stay passable.

Roadside assets: the billboard appears once in the correct place; panel fences, wall portions and boom machinery appear inside the yard; poles/wires follow coherent alignments. Temporary vehicles are not used as structural dimensions.

Game function: bicycle paths are not blocked; road joins and kerbs have no abrupt seams; collisions agree with visible geometry; neither missing nor duplicated meshes remain. Plant/container repetitions use efficient asset placement without flattening all variation.

Claude must deliver

Provide an issue ledger with original picture IDs, affected scene IDs and exact action; original crop beside matching after-capture for each pair; an overhead before/after; changed code/assets list; collision/navigation checks; and an explicit unresolved-details list. A claim that the area was “improved” is insufficient evidence of correction.

For each issue use status: implemented and visually verified / implemented but not verified / unresolved. Do not mark an occluded or unmodelled feature as verified. Check the effect from an adjacent pair to detect position errors hidden by a single camera angle.

COPY ALL THREE PROMPT PAGES TOGETHER

Consolidated Claude prompt — 1 of 3

You are correcting the JJ Rawlings Avenue corridor in LEGONRUSH, from the Okponglo link toward Total and the Legon First/Second area. Implement the corrections in the actual game project using this PDF and all 16 original images. Your task is faithful reconstruction of the supplied reference views, with evidence for each edit.

Attachment numbering is authoritative by order: pairs 1-6 are pictures 1/2, 3/4, 5/6, 7/8, 9/10 and 11/12; first image in each pair is the game and second is real. Pictures 13/14 are satellite layouts, picture 15 is the supplied vector/game layout, and picture 16 is the annotated satellite overview. The user's blue 1-6 markings guide view families, not surveyed positions.

First inspect originals at full resolution and produce detailed crops. Register the avenue centerline, the GRA cluster and the western yard's southern red-roof structure before changing geometry. Compare matched camera headings; do not infer scene placement directly from a rotated screenshot.

MANDATORY feature ledger: for each changed building, roof, fence, gate, billboard or support structure, record source/crop, footprint, visible height, roof profile, facade/fence bays, actual openings, post count/spacing, surface material, neighboring ground and confidence. Count visible features; do not substitute a generic residential asset or invent windows, doors, floors, pillars or hidden wall divisions.

Classify each affected asset as add, retain, reshape, relocate or remove. Remove only a footprint demonstrated to conflict with the registered references. Retain genuine nearby buildings and northwestern sports fields. Top-down imagery establishes layout more strongly than storeys or facade details. Keep unresolved geometry explicit and editable.

The yellow site is not confirmed to be a quarry. Treat it as a roadside equipment/material/construction yard of unconfirmed function. Reproduce the visible bare yard, grey rows, small service structures, fences, scrub, container-like volumes and yellow boom machinery. Do not invent an extraction pit, quarry benches, conveyors, giant spoil heaps or a branded machinery fleet.

Consolidated Claude prompt — 2 of 3

PAIR 1: Correct the GRA frontage. Retain its supported cream-building anchor; calibrate its setback, footprint and visible facade. Replace the unsupported all-grass frontage with the evidenced boundary railing/wall, entrance openings, grey paved forecourt and local vegetation strips. Do not invent window counts or storeys behind obstructing vehicles. Match the visible streetlight and utility-pole types.

PAIRS 2 AND 3: Restore the broad dusty eastern entry and forecourt. Draw its irregular earth boundary and inward access; do not use asphalt markings or turn it into lawn. Add the billboard, slender frame/support, open metal gate/fence and planted small trees/tyre-like containers. Preserve the local grey paved strip near the office frontage. Distinguish this dirt entrance from the genuine opposite main carriageway.

PAIR 4: Restore the longitudinal walking strip, roadside small trees and grouped pots/containers. Position them around the real access boundary, leaving the walking line open. Use the same billboard and enclosure as Pairs 2/3, not copies. Match its edge-on geometry and the visible pole/wire pattern; do not place giant decorative trees along the passage.

PAIR 5: Restore the western yard enclosure, visible wall sections, blue-grey panels, green container-like volume and yellow machinery boom. Replace unsupported manicured lawn with rough grass, shrubs and climbing vegetation, with enough gaps for the enclosure to remain partly visible. Match the sequence from road edge to narrow path, scrub and fence.

PAIR 6: Restore the small weathered service structure, low roof/open-frame form and overgrown fence edge. Replace confirmed conflicting residential prefab geometry only inside the corresponding footprints. Match low roof height and visible posts; do not add an upper floor. Use low-to-medium tangled vegetation instead of dominant rows of spherical trees. Preserve the narrow paved footway and grass/kerb strip.

MAPS: Register pictures 13-16. If the southern green rectangles in picture 15 drive playing fields or grass inside the confirmed yard footprint, correct the relevant source features and rendered meshes. Preserve the separate legitimate northwestern sports fields visible in picture 14. Do not equate a vector-map fill with a verified 3D asset without checking its generator.

Consolidated Claude prompt — 3 of 3

IMPLEMENTATION ORDER: inventory and register; correct existence/placement and ground masks; reconstruct structural silhouettes and openings; add roadside details; tune vegetation and materials; validate all reference viewpoints. Fix shape and topology before decoration. Keep changes local to the evidenced corridor and use reversible asset replacements.

Do not flatten the entire region into uniform ground or invent a hill profile from an undated plan. Match visible local grade and road/path connections. No exact metre measurements are supplied: derive relative proportions from calibrated scene anchors and record the calibration. Preserve functioning road joins and bicycle traversal.

Before declaring completion, capture six corresponding game viewpoints plus an overhead view. Place each after-capture beside its original real reference and close-up crops. Check correct road side, landmark order, frontage setback, surface boundaries, open gates, post gaps, low roof silhouette, scrub density and shared-object consistency across views.

Run relevant collision and navigation checks: no building, billboard support, fence or planting blocks a valid route; dirt entry connects to the road; footway remains passable; no road seams or duplicated meshes; map and rendered land use agree. Use efficient instancing for repeated vegetation and small containers while retaining irregular distribution.

FINAL RESPONSE: list changed code/assets and scene IDs; give an issue ledger tied to picture numbers; provide six before/after comparisons and an overhead comparison; state which checks were run and their results; identify unresolved details. Use “implemented and visually verified”, “implemented but not verified”, or “unresolved” per issue. Do not claim a perfect match without this evidence.

Where the supplied views cannot establish hidden openings, precise building height, industrial site identity or dimensions, state that limitation. Model only supported geometry or a clearly identified provisional mass. Do not replace uncertainty with confident invented detail.