Okponglo signals and the new UGBS graduate block

Two independent correction tasks for Claude. Task A corrects only the traffic-light assemblies in pictures 1/2, located using picture 11. Task B reconstructs the new graduate block using current pictures 7/8, supported by historical structure views 3-6 and footprint context in picture 9. This brief does not redesign the junction or claim unseen building details.



Picture 8: current appearance supplied by the user. The foreground billboard obscures much of the central building.

Mandatory source priority: current facade and roof appearance = pictures 7/8; structural history and obscured massing clues = pictures 3-6; site layout = picture 9. The old raw frame must not override the current glass-and-cladding state.

Identity warning: picture 10 is a vector/game map, not an inspectable 3D game facade. Its circled T-like footprint may correspond to the older red-roof building north of the new site in picture 9. Confirm site registration and object identity before replacing anything.

Deliverable: original-image comparisons, numbered feature annotations, explicit reconstruction steps, compulsory close-up inspection, acceptance checks and a consolidated Claude prompt. Exact metre dimensions and hidden opening counts are not established by these references.

Source register: one pair, then a timeline

Picture 1: Game view: traffic-light correction only.
image(20261015-001812).png

Picture 2: Real traffic lights with blue height/span annotations.
image(20261015-001819).png

Picture 3: Historical construction overview; Street View September 2024.
image(20261015-002402).png

Picture 4: Historical close view: rectangular wing, opaque core and rounded wing.
image(20261015-002407).png

Picture 5: Historical rounded-end view.
image(20261015-002411).png

Picture 6: Historical oblique view with vegetation and utility infrastructure.
image(20261015-002413).png

Picture 7: Current facade photograph; authority for finish and glazing.
image(20261015-002532).png

Picture 8: Second current facade photograph; authority for roof and rounded end.
image(20261015-002540).png

Picture 9: Satellite site layout with blue outline; older construction-stage footprint.
Screenshot 2026-10-15 002648.png

Picture 10: Vector/game map; circled campus footprint requires identity check.
image(20261015-002918).png


Picture 11: Annotated junction layout: location and approach directions for the signals.
Screenshot 2026-10-15 003427.png

Only pictures 1/2 are a game/real pair. Pictures 3-8 tell the construction-progress story. Pictures 9-11 are supporting maps and location evidence. No 3D capture of the current UGBS game building is supplied in this set, so its precise facade errors cannot be independently inventoried here.

Task A: what is wrong with the signal geometry




Picture 1: small standalone signal posts in the game. Scope here is the traffic lights, not the surrounding buildings or landscape.

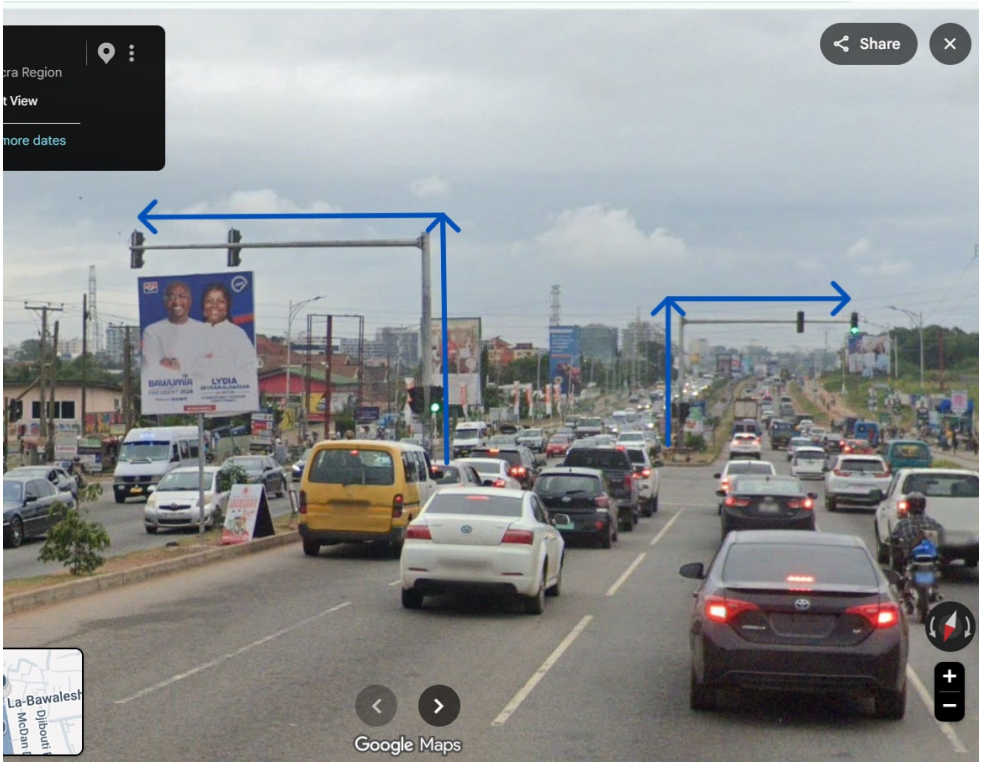

Picture 2: two highlighted mast-arm assemblies. Preserve the user's blue reference arrows.

The game's short posts lack the tall vertical supports and long overhead arms shown in the real image. Correct mast height, lateral reach, pole/arm slenderness, signal-head mounting and orientation together. Enlarging a small post alone will still produce the wrong silhouette.

Task A: inspect the real mast and both head levels

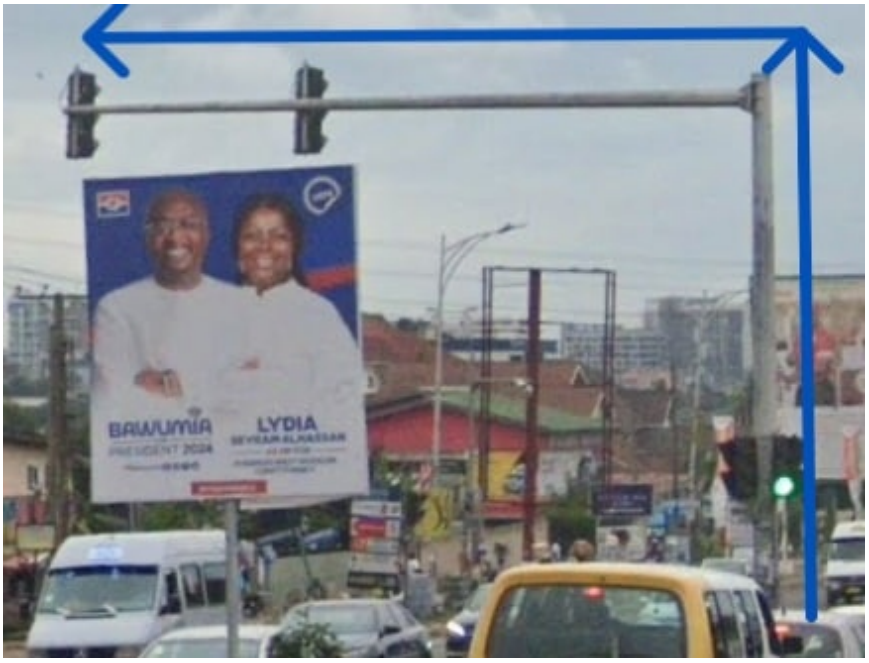

Close crop, picture 2: nearer assembly. Two small housings are visible along the upper arm; a lower green face appears beside the upright.



Close crop, picture 2: farther assembly. It appears smaller mainly because it is farther from the camera.

1. Tall upright: slender grey support, rising above the road and traffic. **2. Overhead arm:** long, nearly horizontal, cantilevered from that support. **3. Upper heads:** individual dark vertical housings attached along the arm. **4. Lower head:** a separately mounted face partway down the upright, as specified by the user and visible on the nearer pole.

Do not interpret “two traffic lights on one pole” as a reason to delete additional visible overhead housings. It specifies the required two mounting levels: overhead and pole-mounted. Count all visible heads individually and document faces hidden by perspective or vehicles.

Task A: mast dimensions and model construction

TL-01 | Replace the assembly silhouette. Build one parent asset containing an upright, a cantilever arm, arm joint/bracket, separate upper-head mounts and a separate lower-head mount. Use a slender cylindrical/tapered visual section consistent with the image; do not use a thick square tower, a streetlight lamp or a full cross-road gantry.

TL-02 | Calibrate height and span separately. Register the junction road width and camera first. The nearer arm spans roughly 340 image pixels while its visible upright covers about 270 pixels before traffic obscures the base. This is an approximate projected ratio, not a real-world dimensional ratio. The farther assembly must be calibrated in its own depth plane. No exact metre values can be recovered from these screenshots alone.


TL-03 | Lower mounting position. Place the supplemental head below the overhead arm and above the base, partway down the vertical support. The user calls this the middle section; do not insist on exactly 50% of mast height. Match the visible image position after perspective alignment. Do not place it at the top joint or at footpath height.

TL-04 | Head form. Use compact dark vertical housings with stacked lenses and small visors where resolved. Orient each face deliberately toward its served approach. Back-facing heads should show housings, not glowing lenses. Do not infer turn-arrow lens types that cannot be resolved in the reference.

TL-05 | Attachment and clearance. Heads need plausible brackets, not floating meshes. Keep support bases off the vehicle path and arm/head geometry above traffic. Check clearances against actual game vehicle height and road elevation; avoid borrowing arbitrary dimensions from an unrelated standard.

TL-06 | Independent tuning. Expose mast height, arm reach, pole diameter, head spacing, lower mounting height, base position and head yaw as independent parameters. Do not uniformly scale the entire junction. Adjust these two evidenced assemblies locally and verify from the picture-1 heading.

Task A: junction orientation and signal faces

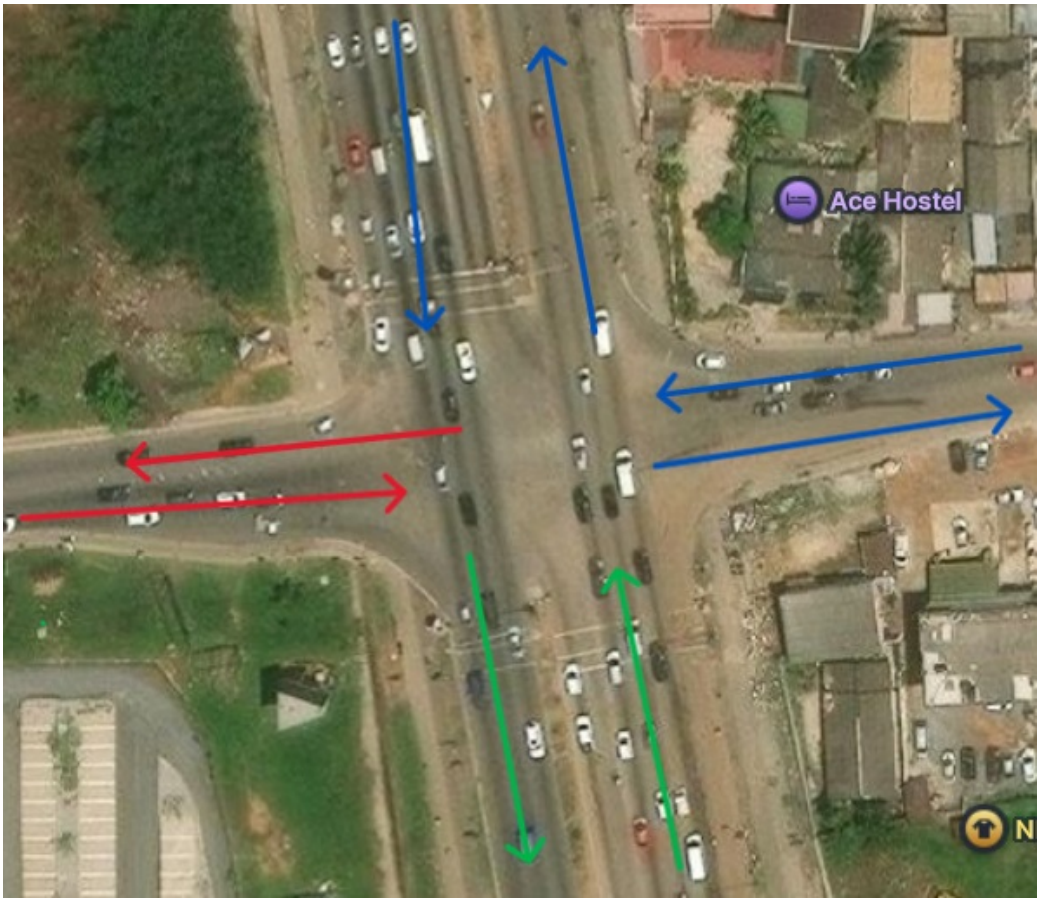

Picture 11: user-supplied junction layout. The arrows show road approach directions; they do not establish signal phases or exact pole coordinates.


Register this layout to picture 1/2 before placing poles. The red side-road arrows, blue northern/eastern arrows and green southern arrows distinguish opposing approaches. Arm direction is local to the lanes it spans; one assembly cannot be copied with unchanged yaw to every side of the junction.

Assign each visible signal face an approach ID. Aim its lens toward the approaching driver/rider, not down the departure lane or sideways across unrelated traffic. A pole can carry heads with different orientations. Only heads confirmed to serve the same movement should share a state; sharing a pole does not prove shared control.


The existing road geometry and user route naming locate the task. Do not infer an entire roundabout design from the name: picture 11 shows the local signalized junction to match. Exact timing and turn permissions are not supplied; preserve existing verified gameplay logic and separate unknown phasing from this geometry fix.

General reference: FHWA's MUTCD discussion identifies approaching-driver visibility as a primary consideration and describes supplemental pole-mounted faces as useful alongside overhead faces. This supports the visibility explanation only; US dimensions/rules are not imposed on this Ghana reconstruction. Source details are on the final reference page.

Task B: historical evidence, not the finish target

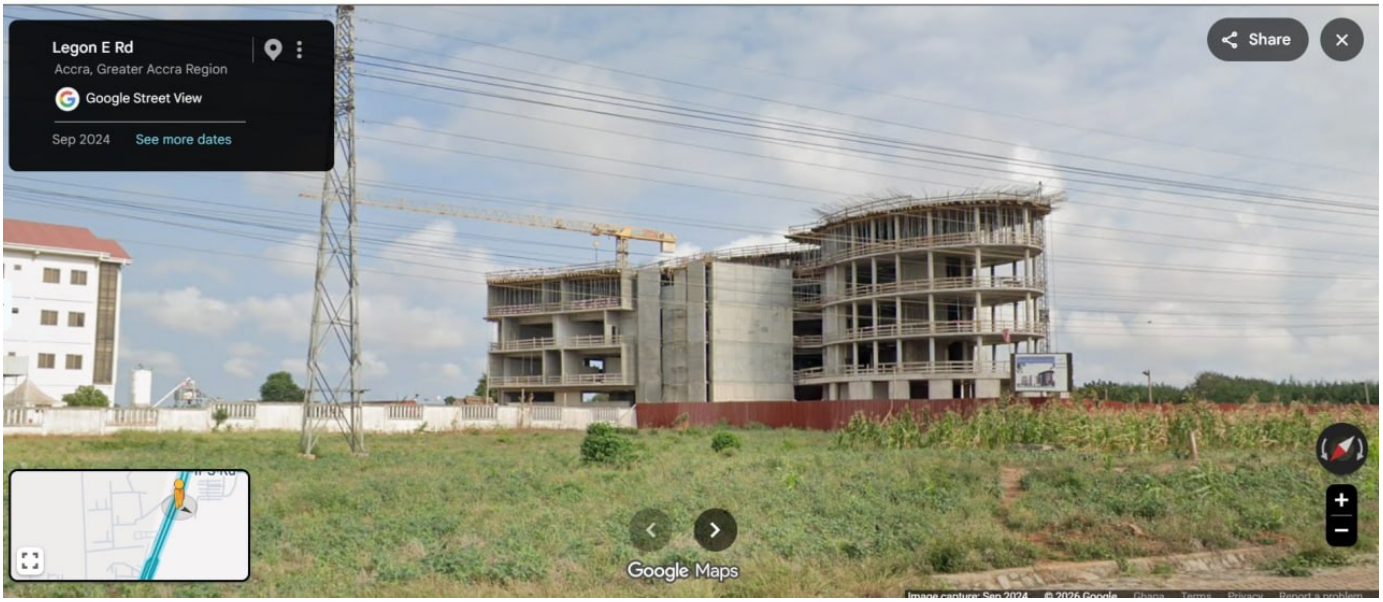

Picture 3: September 2024 frame overview. Retain massing clues; do not copy this as the current finish.

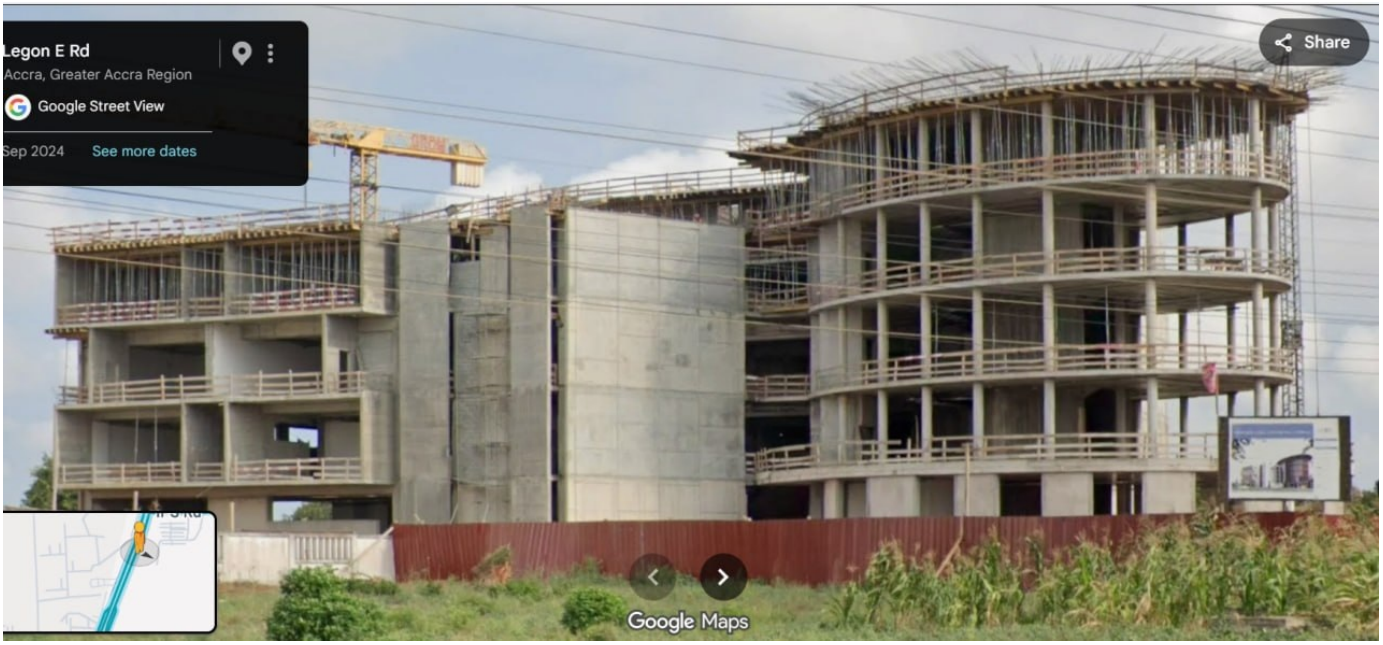

Picture 4: closer historical view. Distinct rectangular wing, opaque central volumes and rounded stacked end are visible.

Useful: floor slabs, approximate level alignment, rounded projection, wing/core relationship and open structural bays. **Superseded:** exposed slab edges as a final appearance, temporary construction rails, full bare-concrete facade, top formwork/scaffold and old tower-crane arrangement.

The old and current views support a ground level plus four main upper facade bands on the visible wings. Confirm the visible slabs/bands in close crops before fixing the level ledger; the hidden rear and any basement are unresolved.

Task B: oblique historical structure clues



Picture 5: rounded end and adjacent core from an oblique angle.



Picture 6: opposite oblique context. Tall grass and bushes partly obscure the base.

The rounded wing is a projecting, convex curved mass with stacked slab outlines, not a flat rectangular end or a hollow inward-curving recess. The solid central core and adjoining wings remain distinct masses. Use both historical directions to understand the plan, then replace the raw external frame appearance using pictures 7/8.

Retain only construction elements still evidenced in the current photographs. Do not automatically keep the old tower cranes, temporary slab rails or exposed upper-level formwork. Current rough vegetation and unfinished surroundings are supported; this does not justify leaving the main facade as an old skeleton.

Task B: current facade - numbered features



Picture 7 with local callouts 1-6. The billboard is foreground occlusion, not a building wall.

1. Rectangular wing: repeated broad blue glazed panels, dark mullions and cream horizontal bands. Model a facade grid matched to the photograph, not small punched residential windows.

2. Rounded wing: blue glass follows a projecting curve; successive floors align vertically. Do not reverse the curvature or build a flat end plate.

3. Recessed bays: the rectangular facade contains visible inset balcony/terrace-like openings interrupting the glass grid. These need depth, reveals and the visible guard/edge detail; do not fill them all with blue glass.

4. Projecting roof edge: broad cream cap with a support visible at the outer left. Distinguish this building element from the billboard's separate diagonal braces.

5. Opaque central zone: cream wall/core surfaces and reddish vertical sections remain visible beside/below the billboard. The central concealed facade is unresolved; do not invent an entrance or window grid there.

6. Foreground: rough dense vegetation and globe-topped site lights. Do not replace this view with an idealized fully paved forecourt.

Task B: current rounded end and roof



Picture 8 with local feature callouts 1-6.

1. Roof canopy: thin, broad pale cap following the rounded end, with generous overhang and visible underside divisions. Reproduce the smooth outline; do not use a red hip roof, stepped terraces or a thick concrete lid.

2. Curved glazing: four upper blue-glass bands separated by pale slab/fascia lines. Dark vertical mullions follow the curve; keep floor elevations continuous with the wing/core.


3. Ground level: reddish infill surfaces with discrete tall blue-glazed openings under a cream band. It is not another identical full-height curtain-wall strip. Vegetation hides some base detail; only reproduce resolved openings.

4. Left roof projection: a long cream horizontal cap and visible angled support at the outer end. Preserve its asymmetry relative to the rounded canopy.

5. Rectangular-wing divisions: large glazed bays, cream framing and inset openings. Count visible bays using crops; avoid extending a repeated bay pattern through solid reddish wall sections.

6. Site state: rough grass, shrubs and partly hidden access. Current exterior progress does not prove a complete manicured landscape or completed interiors.

Task B: close inspection of glazing and recesses

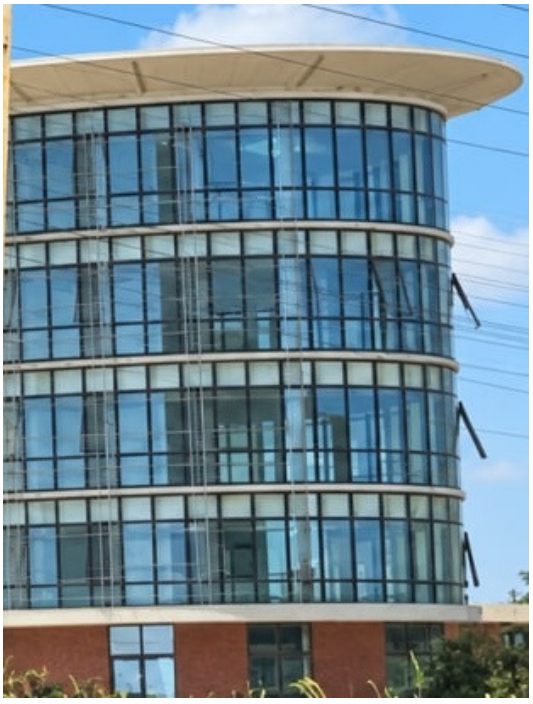

Picture 8 crop: roof edge, four main upper glazing bands and differentiated ground floor.



Picture 7 crop: rectangular glass grid, recessed bays, projecting pale frame and roof support.

Create separate meshes/material assignments for glazing, dark mullions, cream slab bands, opaque cream cores, reddish cladding/infill and recessed voids. The facade must read as layered construction. A blue texture painted across a flat wall will not reproduce recess depth or the curved silhouette.

Use restrained blue reflection with visible dark framing. Avoid opaque neon-blue glass, mirror glare covering every bay or a uniform black window grid. Count only windows that remain distinguishable; the billboard and power pole hide important divisions.

Task B: identify the new building before editing



Picture 9: satellite overview with the user's blue outlines. Upper red-roof T-like building and lower new curved structure are separate footprints.

UG-01 | Separate old campus and new project. The new construction footprint lies below the existing red-roof graduate-campus building in this supplied image. The left portion of the lower blue outline contains the distinctive curved/winged new building; the large right portion is a construction/storage site, not proof of a continuous building wing.

UG-02 | Use the plan for placement. Trace the curved end, connected angular/rectangular masses and open gaps separately. Do not fill the entire blue perimeter with one building. The plan image shows an older construction state; it is stronger evidence for footprint and site relationships than for present facade color or canopy completion.

UG-03 | Register. Align the N4/Legon East Road side, existing upper block, perimeter/service access and curved-end position. Infer the current-photo viewing direction from these anchors; a left/right change in photographs does not mean the building was mirrored.

Task B: map mismatch and safe correction scope



Picture 10: supplied vector/game map. No current 3D building geometry is visible in this attachment.

The circled footprint is T-like and may correspond to the older red-roof block visible above the new site in picture 9. The new rounded-end structure may be omitted, simplified or represented elsewhere. This is an identity/registration question, not a reason to replace the existing block indiscriminately.

Required action: locate the game scene objects and source polygons for both buildings. Compare registered positions against picture 9. If the new structure is absent, add it on its own footprint. If present but wrongly modelled, reshape that asset. Preserve the older block unless independent references establish its own error.

Minimap: if a current-world update leaves the new footprint missing in the game map, correct the appropriate geometry/source data. Keep map and rendered scene consistent. Do not treat the stale satellite's raw frame appearance as authority for the new facade.

Limit: without a UGBS 3D game screenshot, this document cannot prove its existing roof, facade or pillar errors individually. Claude must inspect the actual game project and provide before captures. The target specification remains well supported by pictures 7/8.

Task B: geometry rebuild specification

UG-04 | Mass hierarchy: Model the rectangular glazed wing, projecting convex rounded wing, opaque central/core volumes, connecting zones and differentiated ground level as separate parts of one building. Trace the footprint instead of substituting the older block’s T-shaped prefab.

UG-05 | Levels: Use a provisional visible ledger of ground level plus four main upper facade bands, verified against slab edges in 3-6 and finished bands in 7/8. Align slab elevations between wings. Do not treat the roof canopy as an extra storey or infer a basement from top imagery.

UG-06 | Rounded end: Build a continuous curved envelope in plan. Use enough segments to avoid an obvious hexagonal/cubic silhouette at bicycle viewing distance. Curve glazing and roof together; keep mullions radial/normal to the facade as appropriate. Do not curl it inward.

UG-07 | Roof silhouette: Use the pale low-profile canopy and outer rectangular roof projection seen currently. Its rounded edge is smooth and overhangs the glass. Preserve visible underside ribs/divisions and support where resolved; do not invent roof equipment on hidden surfaces.

UG-08 | Recesses and framing: Inset terrace/opening bays must have real depth and cream edge frames. Match their positions floor by floor. Place structural columns only where evidenced; do not obstruct an opening with arbitrary pillars or fill a terrace with a solid wall.

UG-09 | Central occlusion: Use historical core massing as a constrained clue, but current cream/reddish surfaces as the finish authority. The billboard hides the center: keep any provisional concealed geometry clearly identified. Do not count its support posts as building columns.

Task B: finish, details and site state

UG-10 | Glazing: blue-tinted reflective curtain-wall appearance with fine dark mullions/transoms. Use distinct floor bands. Preserve opaque/recessed interruptions. Do not add small repetitive residential windows or repeat a grid across the ground-floor brick infill.

UG-11 | Paint and cladding: warm cream/off-white slab bands, canopy and opaque central surfaces; reddish/brick-colored vertical panels and ground infill. Some detail could be brick or cladding rather than paint; use a restrained material matching its visible texture. Lighting/glare does not establish a different paint color.

UG-12 | Ground openings: retain discrete tall glazed door/window-like openings visible at the rounded base. Determine each opening type from close inspection where possible; do not label every pane as a usable door. Keep hidden base details unresolved.

UG-13 | Construction progress: replace the obsolete bare skeleton and old temporary upper scaffold with the progressed glazed exterior. Keep only currently evidenced unfinished detail. A model that is fully raw concrete or fully landscaped/finished throughout would both contradict the supplied story.

UG-14 | Environment: preserve rough foreground shrubs, tall grass, real utility-pole/wire context and globe-topped site lights where supported. The billboard is a separate foreground object and may legitimately obstruct the real viewpoint; also capture an unobstructed game verification view to inspect the building behind it.

UG-15 | Site extent: distinguish the main building from the eastern storage/working area inside the satellite outline. Do not create extra office floors, parking paving or grass lawns merely to fill unused space. Satellite tracks/temporary stores may be stale; use restrained provisional site masses until current evidence is available.

UG-16 | Efficient modelling: instance repeated mullions and glazing bays; use a shared material palette and appropriate detail levels. Preserve essential curvature and recess geometry at rider distance. Do not fuse the entire facade into a flat texture merely to reduce object count.

Compulsory close-up inspection clause

MANDATORY BEFORE IMPLEMENTATION: Claude must open originals at full resolution, zoom into every affected feature and make cropped evidence references. Do not reconstruct from a thumbnail, memory of a previous PDF or a generic building template.

Signals ledger: record pole/base position, mast height, arm reach and direction, visible overhead-head count, lower-head mounting height, bracket position, housing shape and face orientation. Separate visible fronts from backs. Record unresolved faces rather than silently omitting them.

Building ledger: record each mass, visible level, roof edge, floor band, column/post, window/door opening, glazed bay, terrace/recess and opaque wall segment. For every item include source number/crop, orientation, material and confidence. Count bays separately on each floor; never extend a facade pattern through an occluded zone.

Inspection order: silhouette and footprint; level count/alignment; roof/overhang; solids versus openings; glazing grid; recess depth and structural supports; material colors; environment. Do not spend time on vegetation while the building remains the wrong shape.

Authority hierarchy: user’s explicit current-state correction and current photos 7/8 control appearance. Old 3-6 support structural interpretation only. Map 9 supports placement. Map 10 must be reconciled by object identity. Picture 11 locates/aligns signals but cannot establish timing.

Uncertainty: hidden central doors, rear elevations, exact dimensions, signal phase schedule and current eastern yard state are not proved. State these as unresolved or provisional. Do not claim a measured reconstruction or a perfect match without supporting images and registered comparisons.

Completion gate: every resolved feature must be checked against an after-capture from the matching direction and one additional angle. Do not declare the task finished based only on code changes or a distant aerial image.

Acceptance tests and required proof

A1 — Signal silhouette: both highlighted assemblies have tall slender uprights and long horizontal arms, not short standalone posts. Height, span and head size are checked in the picture-1 camera and a side view.

A2 — Two mounting levels: each required assembly includes overhead and lower pole-mounted heads. All additionally visible heads are accounted for. Faces aim at their intended approaches; backs do not glow toward unrelated traffic.

A3 — Junction function: bases and collision meshes do not block vehicles/bicycles, arms clear traffic and head orientation follows registered approaches. Same-movement heads share state only after assignment; the geometry fix does not invent unverified local phases.

B1 — Correct object: new curved-end building and older red-roof graduate block remain separate. The correct footprint is registered; no unrelated existing block is overwritten.

B2 — Current structure: rectangular wing, central opaque volumes and convex rounded wing appear in the correct relationship. Visible ground plus four upper bands are checked. Rounded glazing, roof outline and slab bands agree across current photos and older structure clues.

B3 — Detailed facade: blue glazing, dark fine mullions, cream bands, reddish panels and inset openings occupy supported positions. No extra floor, invented window pattern, misplaced column or stepped/red hip roof remains.

B4 — Progress and site: finished exterior areas are current; rough foreground and unresolved construction areas remain faithful to evidence. Billboard/supports are separate from building geometry. Hidden details are listed, not claimed as verified.

Required delivery from Claude: affected scene IDs and changed code/assets; issue ledger TL-01-06 and UG-01-16; registered overhead comparison; signal front/side captures; UGBS matching views 7/8 and an unobstructed facade view; traversal/collision results; and unresolved-details list. Status each issue as visually verified, implemented but unverified, or unresolved.

Consolidated Claude prompt - 1 of 3

Correct two areas of LEGONRUSH using this PDF and the 11 original attachments: (A) the highlighted traffic-light assemblies at the Okponglo/La Bawaleshie junction; (B) the new UGBS graduate-studies building along the Presec route. Implement the actual scene changes and return visual verification.

Only pictures 1/2 are a game/real pair. Pictures 3-6 are older raw-concrete construction photos. Pictures 7/8 show the progressed current appearance and control facade/roof materials. Picture 9 is a stale construction-stage satellite layout; use it for footprint/context. Picture 10 is a vector/game map, not a 3D facade screenshot. Picture 11 locates the signals and identifies approach directions.

Before editing, open every original at full resolution and make crops. Build feature ledgers for poles/arms/heads and for building masses/floors/roofs/openings/columns/glazing/recesses. Record evidence picture, orientation, dimensions calibration and confidence. No generic facade replacement, invented openings or silent hidden-side guesses are permitted.

TASK A: replace the game’s short standalone post forms with tall slender grey mast-arm assemblies. Each requires a vertical support, long nearly horizontal cantilever, plausible joint/brackets, overhead heads and a separate lower head partway down the upright. Tune mast height, arm span, diameter, spacing and lower mounting independently. Match the user’s blue height/span arrows by camera registration; no exact metre dimensions are supplied.

Do not cap the asset at exactly two housings if the original shows additional overhead heads. The user’s key requirement is two mounting levels on a pole. Count the visible heads and distinguish faces from backs. Use compact dark vertical housings with lenses/visors matching the crop, not giant red boxes or streetlights.

Register picture 11 to the road scene. Aim each signal face toward its assigned approaching movement. Do not copy the same yaw around all approaches. Heads sharing a mast need not serve the same movement; synchronize states only for verified same-movement groups. Keep existing validated logic; local phase timings/turn permissions are not established.

Consolidated Claude prompt - 2 of 3

TASK B IDENTITY: locate the NEW building footprint, distinct from the older red-roof block. In picture 9 the new curved/winged structure is below the existing upper block and occupies the left part of the lower blue outline; the right part includes working/storage ground. Do not turn the whole outline into a building.

The T-like circled feature in map 10 may identify the older block. Register coordinates/source polygons and inspect actual scene IDs before replacing anything. If the new building is absent, add it at its own footprint. If present but wrong, reshape that asset. Preserve the existing block unless a separate reference proves a correction is needed.

CURRENT TARGET: reconstruct the rectangular glazed wing, opaque cream/reddish central/core volumes and projecting CONVEX rounded end, with a differentiated ground floor plus four main upper glazing bands visible in 7/8. Verify the level ledger against slab evidence in 3-6. Do not use a generic T-shaped residential prefab, inward curve or flat rectangular end.

ROOF: broad thin cream canopy over the curved end with a smooth rounded outline, overhang and visible underside divisions. Retain the rectangular wing’s projecting pale cap and visible outer angled support. Do not use a stepped roof, extra storey, red pitched roof or thick slab lid. Billboard braces are separate and are not building supports.

FACADE: broad blue-tinted glazing with fine dark mullions/transoms, cream horizontal floor bands and reddish wall/cladding sections. Build real recessed terrace/opening bays where visible on the rectangular wing; preserve depth, reveals and edge/guard detail. Do not paint every surface blue or repeat windows across solid walls.

GROUND: use the visible reddish infill and discrete tall glazed openings under the pale band at the curved base; do not make it identical to upper curtain-wall floors. Vegetation and the billboard conceal details. Label hidden central entrances, rear walls and opening counts unresolved instead of inventing them.

HISTORY: use 3-6 for massing/structural clues only. Replace obsolete exposed frame appearance with current glazing/cladding. Do not retain old cranes, scaffold/formwork or temporary slab rails unless supported in current evidence. Keep visible rough vegetation and partial site completion; do not invent an ideal fully paved campus.

Consolidated Claude prompt - 3 of 3

IMPLEMENTATION ORDER: inventory scene IDs and source map features; register road/building anchors; identify correct assets; correct footprint and massing; align levels and roof; model glazing/recesses/openings; apply materials; restore supported site detail; verify every view. Keep changes reversible and local to these two tasks.

Expose useful independent parameters. For signals: mast height, span, diameter, head locations/yaw and lower mounting. For UGBS: wing dimensions, curved radius/arc, floor elevations, roof overhang, band thickness, mullion spacing and recess depth. Use calibrated relative proportions; do not claim metre measurements inferred from screenshots alone.

Performance: reuse materials, instance repeated glazing/mullions and use suitable detail levels while preserving silhouette and real recess depth. Keep signal lenses, structural solids and glass as distinct controllable parts. Collision geometry must agree with the visible road/structure and keep bicycle routes clear.

VERIFICATION: give a picture-1 signal approach capture plus side view; both UGBS reference headings 7/8; an unobstructed building inspection view; and a registered overhead comparison. Compare tall mast silhouette, arm reach, two head levels, approach facing, correct asset identity, convex curvature, roof profile, level bands, glazing grid, opaque walls and actual recessed openings.

Update the game map if the corrected new footprint is absent or misidentified there. Preserve legitimate older campus geometry. Do not use stale map textures to undo current facade progress. Check collisions, arm clearance, navigation and signal-state grouping using existing verified game logic.

FINAL REPORT: list changed code/assets and scene IDs; status issues TL-01-06 and UG-01-16 as visually verified, implemented but unverified, or unresolved; provide matching before/after captures; summarize tests and unresolved details. Do not say “perfectly matched” without per-feature evidence. Missing source detail is a stated limitation, not permission to fabricate.

References, evidence limits and handoff

Primary evidence: the 11 user-supplied images, indexed on page 2. Building identity and chronology follow the user's explanation. Pictures 3/4/5 visibly identify September 2024 Street View or the associated old frame view. Current photos 7/8 have no visible capture date; "current" is the user's supplied chronology.

External technical context: Federal Highway Administration, MUTCD 2009, Chapter 4D, sections 4D.11 and 4D.12. General visibility principles: overhead faces can be supplemented by pole-mounted faces; faces are aimed for approaching road-user visibility. This is background explanation, not a Ghana design standard, certification or a dimension specification. Accessed 15 October 2026.

https://mutcd.fhwa.dot.gov/htm/2009/part4/part4d.htm

The local photo and user's instructions control the reconstruction. Exact signal elevations, pole coordinates and phasing require calibrated scene data or additional field evidence. A single photograph cannot establish how every head around the junction is operated.

Building limits: old plan imagery does not prove current roof equipment or cladding on unseen elevations. Foreground billboard occlusion prevents a complete central facade ledger. No supplied 3D game screenshot shows UGBS, so the actual game asset must be inspected by Claude before edit decisions are finalized.

Handoff: send this full PDF and all 11 originals to Claude together. The consolidated prompt is on pages 18-20; the compulsory inspection clause is on page 16. The building's current facade source pages are 9-11. The traffic-light geometry and approach instructions are pages 3-6.